SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class matter. Copyright, 1895, by Munn & Co.]

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. LXXII.—No. 19. ESTABLISHED 1845. NEW YORK, MAY 11, 1895 $3.00 A YEAR. WEEKLY.

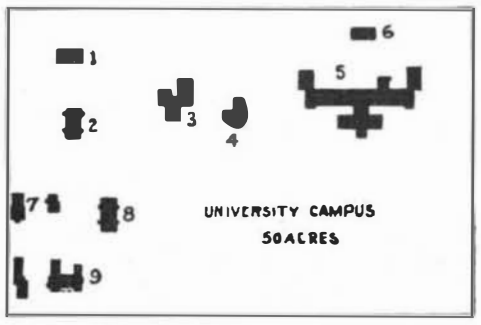



1 ARMORY
2 DORMITORY
3 SCIENCE HALL
4 ELECTRIC BUILDING
5 ENGINEERING BUILDING
6 LOCOMOTIVE LABORATORY
7 PHARMACEUTICAL LABORATORY
8 UNIVERSITY HALL
9 ART HALL
10 U.S. EXPERIMENT STATION
11 UNIVERSITY FARM 135 ACRES

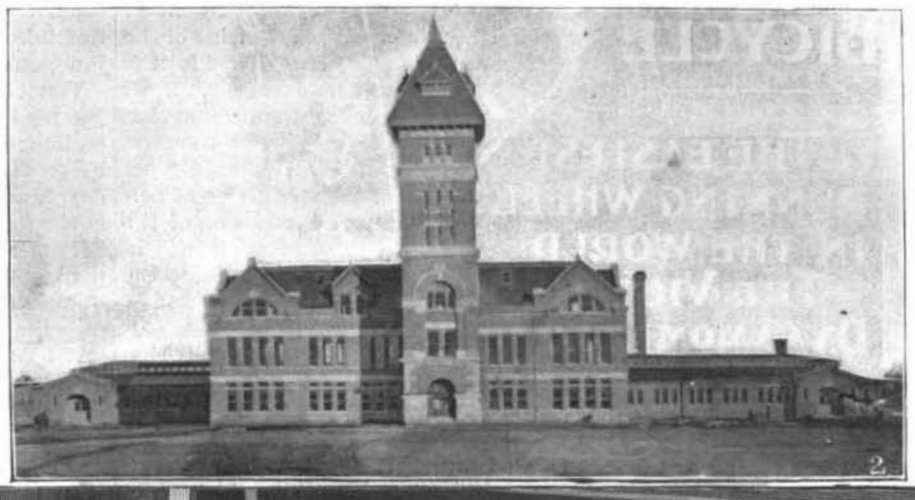

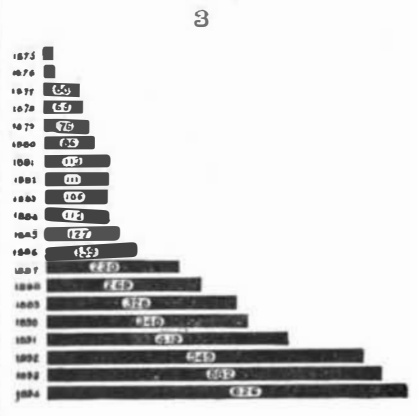

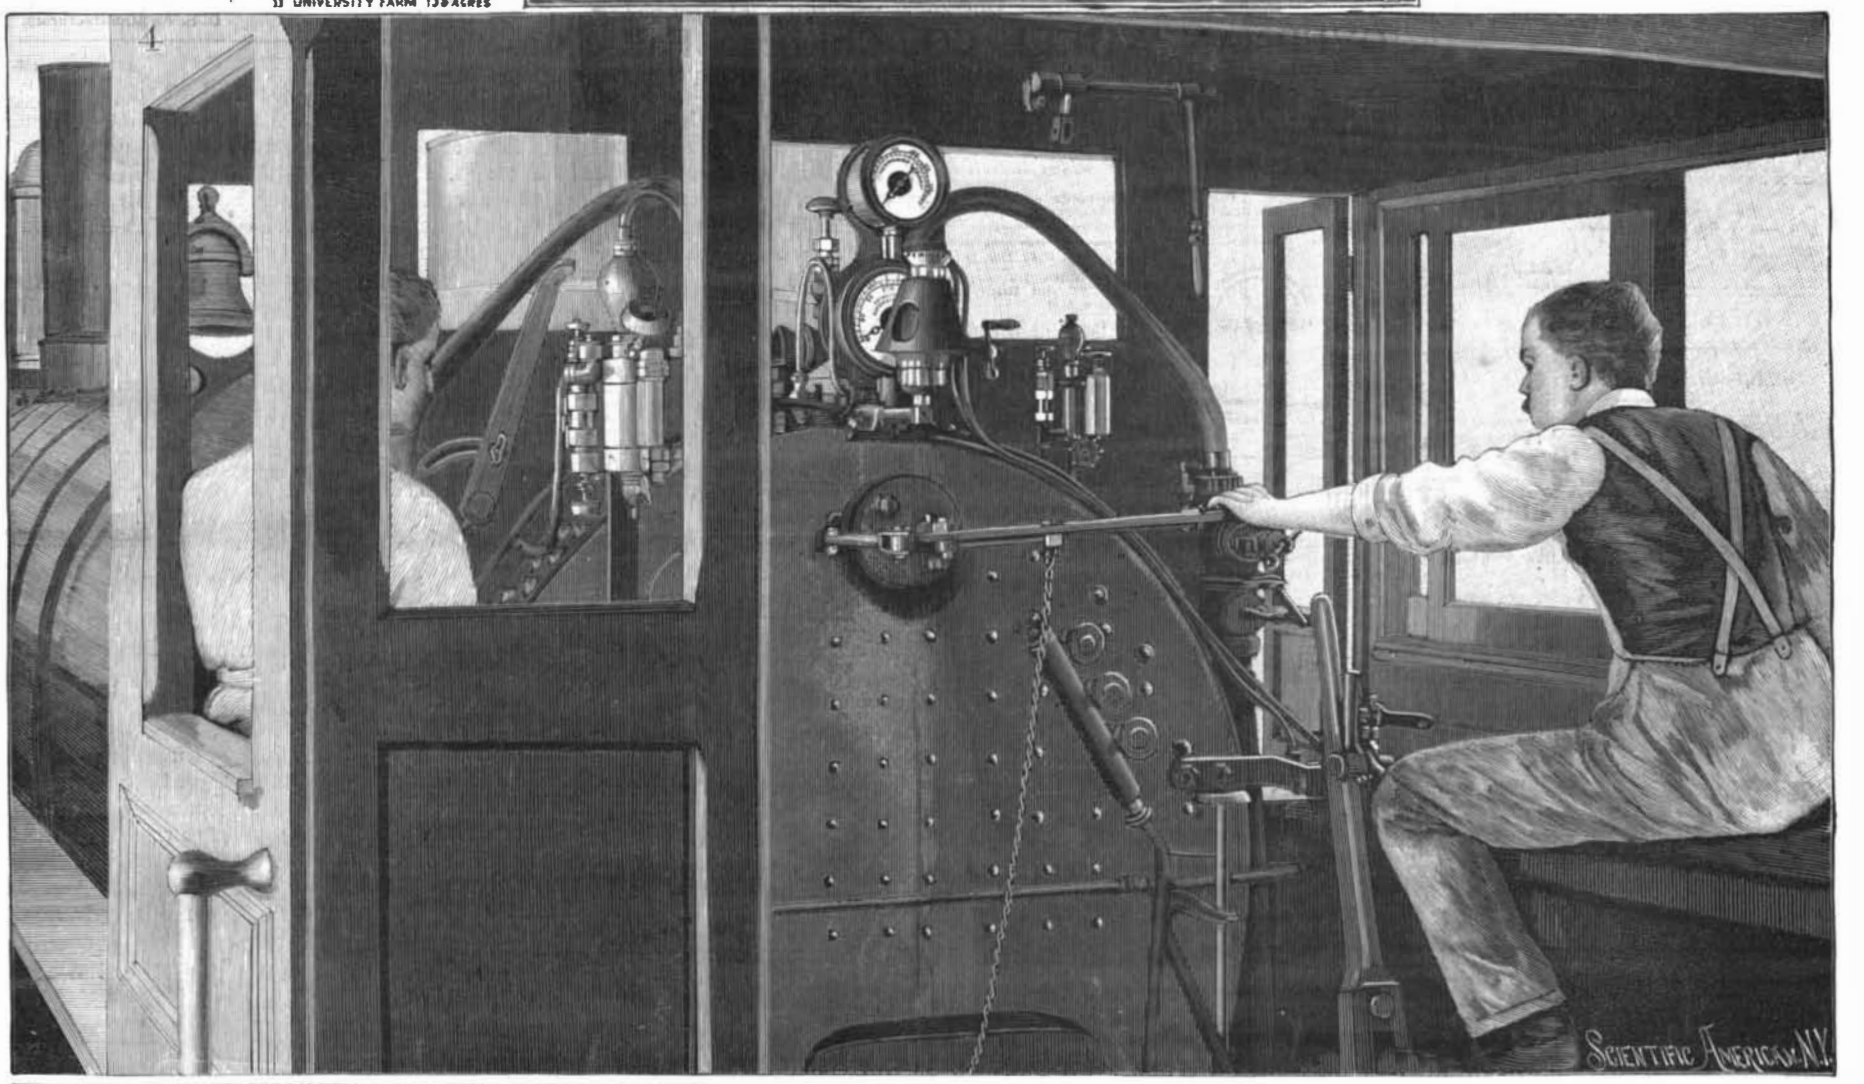

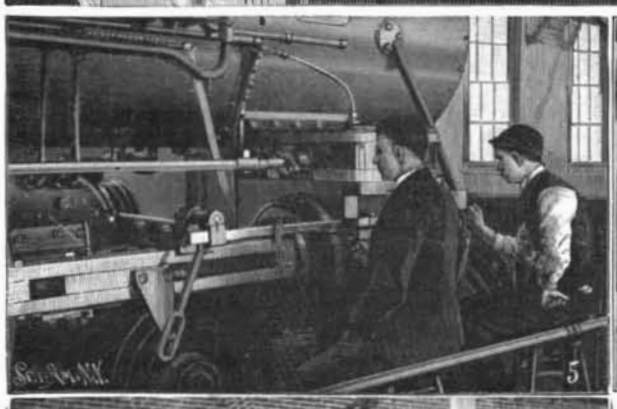

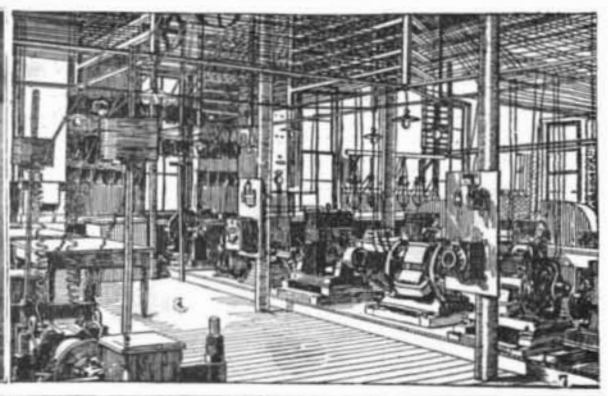

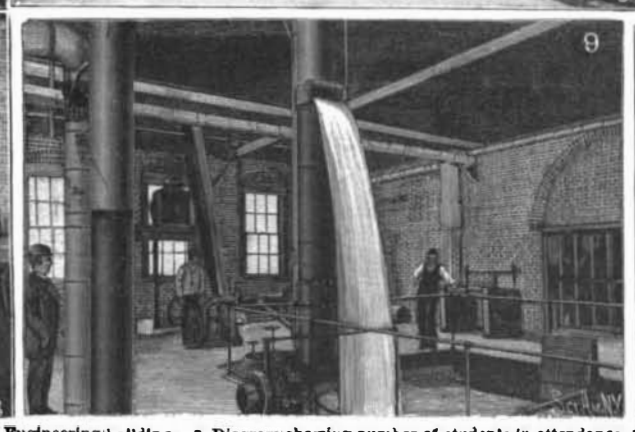

1. Plan of campus, showing location of the more important buildings. 2. Engineering building. 3. Diagram showing number of students in attendance, 1875-94. 4. Locomotive testing: In the cab. 5. Taking indicator diagrams. 6. Field engineering. 7. A corner in the dynamo room. 8. Testing strength of beams. 9. Testing centrifugal pump. 10. Working up a test.

PURDUE UNIVERSITY, LA FAYETTE, IND.—[See page 292.]

© 1895 SCIENTIFIC AMERICAN, INC.

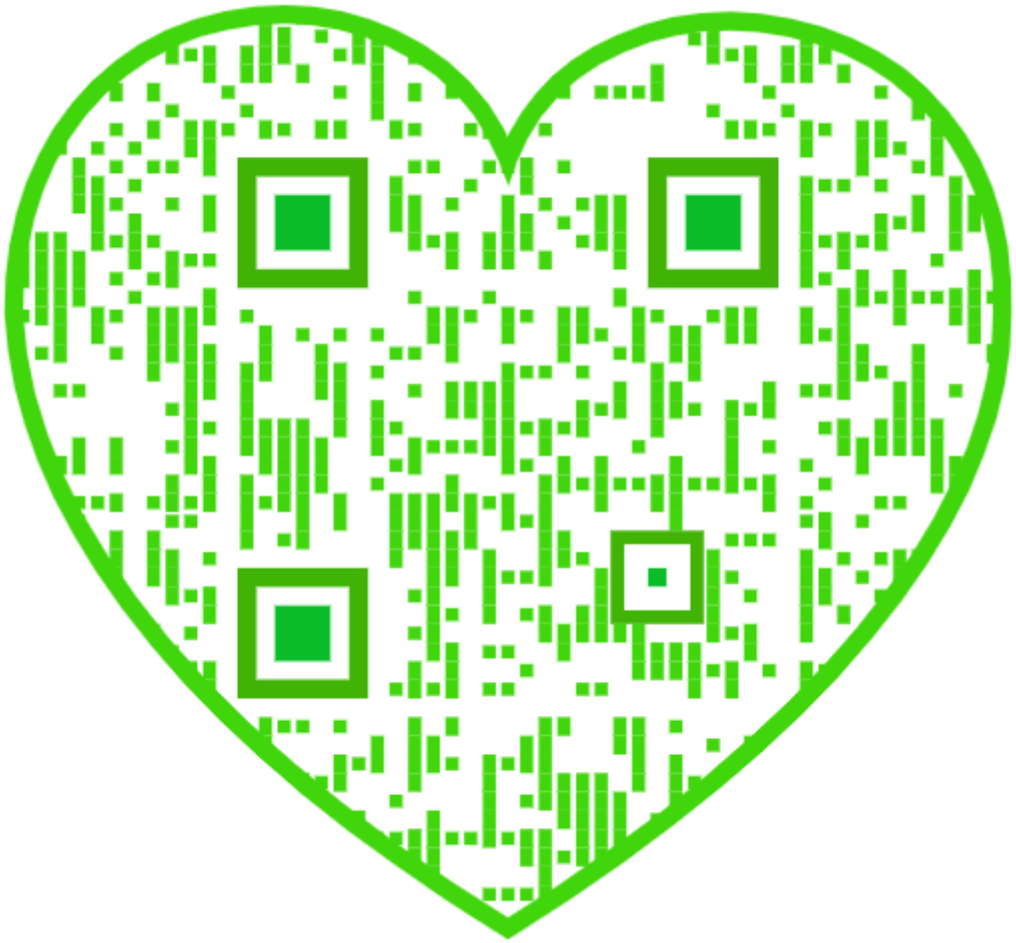

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

O. D. MUNN. A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year, for the U. S., Canada or Mexico.....$3 00
One copy, six months, for the U. S., Canada or Mexico..... 1 50
One copy, one year, to any foreign country belonging to Postal Union. 4 00

Remit by postal or express money order, or by bank draft or check.

MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

The Scientific American Supplement

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, $5.00 a year, for the U. S., Canada or Mexico. $6.00 a year to foreign countries belonging to the Postal Union. Single copies 10 cents. Sold by all newsdealers throughout the country. See prospectus, last page.

Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, to one address in U. S., Canada or Mexico, on receipt of *seven dollars*. To foreign countries within Postal Union *eight dollars and fifty cents a year*.

Building Edition.

THE ARCHITECTS AND BUILDERS EDITION OF THE SCIENTIFIC AMERICAN is a large and splendid illustrated periodical, issued monthly, containing floor plans, perspective views, and sheets of constructive details, pertaining to modern architecture. Each number is illustrated with beautiful plates, showing desirable dwellings, public buildings and architectural work in great variety. To builders and all who contemplate building this work is invaluable. Has the largest circulation of any architectural publication in the world.

Single copies 25 cents. By mail, to any part of the United States, Canada or Mexico, $2.50 a year. To foreign Postal Union countries, $3.00 a year. Combined rate for BUILDING EDITION with SCIENTIFIC AMERICAN, to one address, $5.00 a year. To foreign Postal Union countries, $6.50 a year. Combined rate for BUILDING EDITION, SCIENTIFIC AMERICAN and SUPPLEMENT, $9.00 a year. To foreign Postal Union countries, $11.00 a year.

Export Edition of the Scientific American,

in which is incorporated "LA AMERICA CIENTIFICA E INDUSTRIAL," or Spanish edition of the SCIENTIFIC AMERICAN, published monthly, uniform in size and typography with the SCIENTIFIC AMERICAN. Every number contains about 80 pages, profusely illustrated. It is the finest scientific, industrial export paper published. It circulates throughout Cuba, the West Indies, Mexico, Central and South America, Spain and Spanish possessions wherever the Spanish language is spoken. THE SCIENTIFIC AMERICAN EXPORT EDITION has a large guaranteed circulation in all commercial places throughout the world. $3.00 a year, post paid to any part of the world. Single copies 25 cents.

☞ Manufacturers and others who desire to secure foreign trade, may have large and handsomely displayed announcements published in this edition at a very moderate cost. MUNN & CO., Publishers,
361 Broadway, New York.

☞ The safest way to remit is by postal order, express money order, draft or bank check. Make all remittances payable to order of MUNN & CO.

☞ Readers are specially requested to notify the publishers in case of any failure, delay, or irregularity in receipt of papers.

NEW YORK, SATURDAY, MAY 11, 1895.

Contents.

(Illustrated articles are marked with an asterisk.)

Academy of Sciences, the National..... 291
Alaskan gold regions, the..... 299
Aluminum, notes on..... 295
Armor plate, testing 18 inch..... 299
Books and publications, new..... 300
Bridge, Van Buren Street, Chicago*..... 296
California products in Berlin..... 298
Cycling and the heart..... 295
Electrical appliances in the Japanese war..... 291
Engine power, figuring (6517)..... 301
Engine, traction, gasoline*..... 294
Fog signals..... 298
Force and energy..... 290
Freckles, removing (6507)..... 300
Freight car doors..... 294
Glue, liquid..... 293
Gnu, white tailed, the*..... 299
Heavens, the, in May..... 290
Horn, natural, working (6506)..... 300
Hotel Majestic, the, New York..... 293
Inventions, recently patented..... 300
Kiama, N. S. W., "blow hole" at..... 297
Lake Superior, gateway to..... 294
Lightning freaks..... 295
Milk, the boiling point of..... 298
Moving a masonry house..... 298
Notes and queries..... 300
Palais de l'Elysee, Paris..... 297
Phelps, George M..... 291
Purdue University, La Fayette, Ind.*..... 289
Steamers, new lake..... 294
Torpedoes, instrument for placing*..... 295
Town, rural, fate of the..... 293
Transparencies, collodio-chloride for..... 298
Trolley, the, in Rome..... 293
Typewriter ribbons (6508)..... 301
Varnish, black (6520)..... 301
Violet writing ink (6509)..... 301
Water motor, Rathbun's*..... 298
Window cleaning accidents, prevention of..... 294
World's fairs in 1896..... 295

TABLE OF CONTENTS OF

SCIENTIFIC AMERICAN SUPPLEMENT

No. 1010.

For the Week Ending May 11, 1895.

Price 10 cents. For sale by all newsdealers.

PAGE

I. AGRICULTURE.—Molasses Used as Cattle Food.—The feeding of cattle with molasses as now carried out in Germany..... 16148

II. ARCHÆOLOGY.—The Khmer Ruins of Siamese Cambodia.—The archæology of Cambodia.—Interesting remains of old time temples found there.—Remarkable effigies of Brahma.—4 illustrations..... 16146

III. ASTRONOMY.—Saturn's Rings.—The theory of the constitution of Saturn's rings.—Probable proof of their constitution recently accomplished by Professor Keeler of Pittsburg..... 16147

IV. CHEMISTRY.—Argon and Helium.—Professor Ramsey's lecture in Paris on argon and helium.—1 illustration..... 16145
Chemical Behavior and Use of Aluminum.—An examination into the action of different substances upon aluminum..... 16145
Composition of the Extinctive Atmospheres Produced by Flames.—By FRANK CLOWES, D.Sc., London.—A very interesting paper on the chemistry of flames, involving an analysis of the products of combustion.—1 illustration..... 16145
Isolation of Free Hydrazine, N_2H_4.—A very interesting achievement in the isolation of free hydrazine.—The method employed, the results and its properties..... 16144

V. CIVIL ENGINEERING.—The Long Island Water Basin.—Brooklyn's reservoir.—By A. N. BELL, A.M., M.D.—A very valuable review of the possible water supply of the city of Brooklyn and Long Island in general..... 16135

VI. EDUCATION.—Contributions to Science by Instructors.—By MARCUS BENJAMIN.—The role of the science teacher as original investigator and the work that has been done by them..... 16148

VII. ELECTRICITY.—An Electric Incubator.—An apparatus for producing fixed temperature electrically used for raising chickens and for the culture of bacteria.—2 illustrations..... 16143
An Electric Rudder Motor.—A storage battery electric launch with peculiar machinery for propelling.—3 illustrations..... 16142
Portable Electric Drills.—A type of electric drill with movable motor on truck to accompany it.—1 illustration..... 16143

VIII. HORTICULTURE.—Rockets.—An old time flower.—Its availability and method of cultivation.—1 illustration..... 16148

IX. HYGIENE.—Penalties of Ignorance.—The harm done by ignorance of hygienic precautions in hospitals, in families, and in the matter of food supply.—A most suggestive and valuable paper..... 16148

X. NAVAL ENGINEERING.—Induced Draught.—By Mr. W. A. MARTIN.—The use of artificial draught for marine boilers.—Its advantages and comparison of methods for carrying it out.—1 illustration..... 16136
Machinery of H. M. S. Magnificent.—Triple expansion engines for the new line-of-battle ship recently launched at Chatham, England.—3 illustrations..... 16137

XI. PHYSICS.—Projections by the Oxyetheric Blowpipe.—An excellent apparatus for magic lanterns, giving an intense light of small diameter of luminescent area.—2 illustrations..... 16144
The Slit of a Spectroscope.—By WILLIAM CROOKES, F.R.S.—An excellent article on a material for the jaws of the spectroscope slit.—2 illustrations..... 16143

XII. POLITICAL ECONOMY.—The Partition of Africa.—The map of Africa, showing how the great continent has been divided among the powers of the world.—1 illustration..... 16147

XIII. RAILROAD ENGINEERING.—Extension of the Paris-Sceaux Railway.—A description of the underground railroad in France.—3 illustrations..... 16135

XIV. TECHNOLOGY.—Improvements in Tanning Skins and Hides.—The use of hydrogen with arsenic for hides..... 16138
Radiant Tissue for Incandescent Gas Lamps.—By F. DE MARE, of Paris.—A new invention for the production of mantles for incandescent gas burners of the Welsbach type.—6 illustrations..... 16143
The Sand Blast Processes.—By JOHN J. HOLTZAPFFEL, Assoc. M. Inst. C.E.—A valuable article on this most interesting process.—Its capabilities and development.—The apparatus employed and its different uses, as for sharpening files.—8 illustrations..... 16138

FORCE AND ENERGY.

In the usual treatment of the science of mechanics and physics, three central ideas are generally made very prominent. These are force, work, and energy. The order in which they are given is an index of the treatment of the subject. Force is defined; then work is described as the exercise of force along a path through space; and, finally, energy is defined as the capacity for doing work. Nothing is more certain than the fact that a complete and working understanding of the relations of force and energy is essential to the study of mechanics and physics, and the great errors of the world of scientists and investigators have been due to ignorance or misconception of these relations. It is but a few years since the mistaken doctrine of the conservation of force was definitely abandoned for the true doctrine of the conservation of energy. Such abandonment indicated a very recent understanding of the true relations of force and energy, for the erroneous expression conservation of force is hardly yet extinct. The many attempts at the production of perpetual motion indicate a want of appreciation of the fundamental bases of science. The search is still in progress, hopeful enthusiasts refusing to accept the truth that energy is as indestructible as matter, and as impossible of creation.

But it would seem that in the threefold division force, work and energy, there is either one word too few or one word too many. Energy can be expended, and if expended, produces an exact equivalent of other energy. As fast as one quantity of energy is expended or disappears, another quantity exactly equal, though it may be of widely different form, is produced. The sum of all the energies of the universe is always equal. Now, what distinct existence can work be said to have? When energy is expended it does work; it reproduces an equal amount of energy; therefore the term work must be accepted as the synonym for the "production of energy." It would seem better to abandon the term "work," as ordinarily used, to establish the basis of mechanics, unless a synonym for the "expenditure of energy" could be found. The term "working" might supply this synonym. But the real basic terms in mechanics should be either the two, force and energy, or the four, force, energy, expenditure of energy and production of energy.

The terms work and working may be substituted for the last compound terms. As it stands now, there is a strong tendency to place energy in its definition as a sort of subsidiary to work. It should be treated as the all-important thing, and work as a convenient expression of a single one of its phases. An advanced treatment of the subject of mechanics might be based on the entire omission of the term work, making it a science of force and energy, treating work as the expression of the concrete only.

The realization of the true meaning of work makes the understanding of the impossibility of perpetual motion much clearer. No machine can produce energy or do work without an exact equivalent of energy being put into it. There is a further aspect of the subject. After all the coal is burned, after the sun has cooled down and after all the possibilities of establishing differences of temperature will have disappeared, the energy of the universe will be the same as ever, but no work will be possible, no energy can be produced. This supplement to the doctrine of the conservation of energy tells us that the available energy of the universe is tending to zero.

But as the first doctrine proscribes perpetual motion, the second opens up a possibility of a false or pseudo-perpetual motion in the conversion of unavailable into available energy. This is in the suggestion of Clerk-Maxwell, who fancifully imagines a "demon" at some future time separating the particles of matter into two divisions moving in opposite directions, without expending any energy, but simply rendering available the existing energy of all things.

If man could but separate the molecules of a gas into two sets, one as they beat to the right, the other as they beat to the left, he would be doing the act of Maxwell's demon, and the energy of the air would be made available. It would be utilized in the remixing of the molecules, and the work done would be measured by the energy abstracted from the air. The molecular motion would be lessened, or, what is the same thing, the temperature would be lowered. But the same sum of energy would exist, could we but render it available.

It is as if man started in the world with a quantity of matter or weights placed at a height and an equal quantity of weights at an equal depression below his level. Since the beginning of the human race man would be industriously raising one set of weights by lowering the other. Thus all would tend to reach the same level, and when this would be reached neither set would have any advantage of position over the other, and available energy would have reached its zero. But the same total of energy would be present, and if not zero would involve the idea that the middle plane is above the zero point. This is the same as saying that if the universe lost all its available energy it would not reach the absolute zero, whereall molecular motion stops. But if the degradation of energy shall ultimately bring all matter to the absolute zero, then Maxwell's demon would find his occupation gone, and like Macaulay's New Zealander could only sit still and contemplate the ruins of the past.

THE HEAVENS IN MAY.

The interesting assemblage of planets in the evening sky will be increased in number during May by the addition of Mercury, which is in superior conjunction with the sun on the evening of the 4th. But not until the end of the month will the little planet be far enough east of the sun to be well seen. At that time it will be near Jupiter in the constellation Gemini. Early in June it will be in rather close conjunction with Jupiter.

Venus moves during May from Taurus into Gemini, passing a little more than two degrees north of Jupiter an hour before noon on the 18th. As Venus has now become so bright as to be visible to a keen eye at midday, it will be possible, on this occasion, to find Jupiter in the daytime with the aid of Venus, and to see them both with the aid of a strong field glass. The experiment should be made between two and three o'clock in the afternoon, when the two planets will be near the meridian. At the end of the month Venus will be near the twin stars of Gemini, Castor and Pollux. She will then have attained about one-half of her maximum brightness.

Mars, which passed Jupiter on April 25, will continue to move eastward during May, and at the end of the month will be in the eastern part of Gemini, near Venus, with which planet it will be in close conjunction on the 5th of June.

Jupiter, following the example of Mars, whom he replaced in the public eye during the latter part of the winter, is becoming less conspicuous as he draws nearer the sun, and early in June he will cease to adorn the sunset sky. Jupiter remains in Gemini, moving slowly eastward, and at the close of May will be near the third magnitude star Epsilon.

Saturn replaces Jupiter, advancing with the annual revolution of the heavens from the east. This splendid and unique planet crosses the meridian at the opening of May about 11:30 P. M., and at the end of the month about 9:30 P. M. It is in the eastern part of the constellation Virgo, near the fourth magnitude star Kappa. The only star in its neighborhood comparable in brightness with Saturn is Spica, the leading brilliant of Virgo, which shines about 12° almost directly west of the planet. Saturn's rings now present a beautiful appearance with a 3 inch or 4 inch telescope. It is the north pole of the planet that now leans earthward, and consequently it is the north side of the rings that we see. The earth is between 16° and 17° above the plane of the rings. Their major axis appears about 42″ in length and their minor axis about 12″. A good 4 inch telescope is capable of showing five of Saturn's satellites, Japetus, Titan, Rhea, Dione, and Tethys. The other three, Hyperion, Enceladus and Mimas, are visible only with more powerful instruments. No one who has an opportunity to look through a telescope should fail to see Saturn. Its rings are an unceasing source of wonder, and no picture ever made of them is a perfect likeness.

Uranus is in Libra close to the fifth magnitude star Nu and about 4° east of Alpha, a star of the third magnitude. It may assist the reader in finding the place of Uranus to know that it is about 14° east-southeast of Saturn. As a telescopic object for amateurs it is hardly worth attention. Uranus is in opposition to the sun on the 8th.

Neptune is very near the fifth magnitude star Iota in Taurus, between the horns of the imaginary bull, and there, on the 19th, it will be in conjunction with Mercury. The conjunction will not be close, however, Mercury being 3½° to the north.

May opens with the moon at first quarter in Cancer. The moon fulls on the evening of the 8th in Libra and attains last quarter on the afternoon of the 16th, in Aquarius. The new moon phase for May occurs in Taurus on the 24th, at 7:46 A. M., and the second occurrence of first quarter for the month happens on the morning of the 31st in Leo.

The moon pays her May visits to the planets on the following dates: To Saturn on the 7th at 8:35 P. M.; to Uranus on the 8th at 9:04 P. M.; to Neptune on the 25th at 5:53 A. M.; to Mercury on the 25th at 10:44 P. M.; to Jupiter on the 26th at 7:42 P. M.; to Venus on the 27th at 10 A. M.; to Mars on the 27th at 6 P. M.

Among objects of special interest to possessors of small telescopes that may be noted this month are a number of beautiful double stars. One of the finest of these is Gamma Virginis, a wonderful binary star whose components were so close together in 1836 that no telescope then in existence was able to separate them. Now, however, a 3 inch splits them easily, their distance being nearly 6″. They are both of the third magnitude and their equality in this respect adds to the beauty of the sight. To me there is always an impression of rivalry in a double star whose components are nearly equal. Each seems to be shining its best, as if conscious of the presence of the other. A

© 1895 SCIENTIFIC AMERICAN, INC.

still more beautiful double, though more difficult, and requiring a better telescope to be well seen, is Epsilon Bootis. The peculiar charm of this star depends upon the splendid contrast of colors presented by its two unequal components. The larger star of the two is of the third magnitude and deepyellow; the smaller star is of the sixth magnitude and bright green. Their distance apart is less than 3", and on account of the inequality of their magnitudes a 4 inch glass is likely to give a more satisfactory view of them than a 3 inch, although the latter is capable of separating them and of showing their colors also.

Another double star much resembling Epsilon Bootis, but easier to separate, is Gamma Leonis. The larger component is of the third magnitude, and the smaller of the fourth, the first being yellow and the second green or greenish blue. The distance is about 3¾".

Look also with a 3½ or 4 inch glass at Iota Leonis, whose larger star is of the fourth magnitude, color pale yellow, and the smaller star of the seventh magnitude, color light blue; distance 2½".

A very beautiful and easy double, now well placed for observation, is 12 Comæ Berenicis. Even a 2 inch telescope will show this readily. as the distance of the components exceeds one minute of arc. Their magnitudes are fifth and eighth, and their colors yellow and rose red or lilac.

Everybody of course knows the splendid Mizar in the middle of the handle of the Great Dipper. An average eye sees its companion Alcor without optical assistance. With a 2 inch or 3 inch telescope Mizar is seen to be itself double, the larger star being of the third magnitude and white, and the smaller of the fifth magnitude and light emerald.

The beautiful Cor Caroli, the brightest star in the constellation Canes Venatici, must also be mentioned. The telescope shows that it consists of two stars, about 20" apart, the larger of which, of the third magnitude, is white, while the smaller, of the sixth magnitude, or under, is distinctly lilac.

Those who are not familiar with the constellations will need to use a star atlas for finding the double stars just described. Their places cannot be satisfactorily indicated by mere description.

GARRETT P. SERVISS.

THE NATIONAL ACADEMY OF SCIENCES.

The meeting of the National Academy of Sciences that was held in Washington recently was of more than usual interest, owing to the special character of the business transacted.

The Academy, as many of the readers of the SCIENTIFIC AMERICAN know, but of which fact the general public persists in remaining very ignorant, is the highest scientific body in the United States, and an election to its membership is the greatest honor that an American can expect to receive at the hands of his countrymen. To this Academy all questions of scientific importance that come up in the administration of the government are referred for final decision. Even matters of the utmost delicacy, such as one involving the life or death of a geological survey, have been passed upon by them and their decision accepted without an appeal. Its membership is limited by law to 100 members, and it is never full. Indeed, in recent years, owing to the large number of candidates proposed, no choice was possible, and the number of members had been reduced by death to below ninety.

Two meetings are held each year. One on the third Tuesday in April, always in Washington, D. C., and the other, usually elsewhere, about the 1st of November. The stated meeting, as the one held in the spring is called, was convened on April 16 in the audience room of the United States National Museum, and continued its sessions until April 19.

Among the features of this year's meeting that gave it unusual prominence was the election of a new president. In the more than thirty years of its existence, for it was founded in 1863, by an act of Congress, the Academy has had but few presiding officers. Alexander D. Bache, who for so long a time filled the high office of superintendent of the United States Coast Survey, was the first to receive the presidency from the hands of his associates. From the inception of the Academy until his death, in 1868, he filled that place. His able colleague in Washington, Joseph Henry, the first secretary of the Smithsonian Institution, came next, and for ten years, with courtly grace, he presided over the meetings of the Academy. He died in 1878, and William B. Rogers, the founder and president of the Massachusetts Institute of Technology, was chosen as his successor. His term of office was comparatively short, and scarcely had four years elapsed when he was called to join the silent majority. The Academy then inaugurated a different policy, and Professor O. C. Marsh, of New Haven, so well known for his studies in paleontology, being at that time vice-president of the Academy, was confirmed in the higher office by his associates at the ensuing election. Professor Marsh was then and is still in the prime of his mature manhood. He filled the office with ability and judgment for two terms of six years each, and, having declined a third term, stepped down into the ranks again.

To fill his place the Academy has chosen a veteran, and Wolcott Gibbs, of Newport, R. I., the Nestor of American chemists, was given the high office of president of the National Academy of Sciences. To even briefly review the career of this eminent scientist would be an arduous undertaking and one that, to be well done, must be lovingly done; for among the teachers of science no one has so thoroughly succeeded in attracting students by the charm of his personal magnetism since the time of Louis Agassiz as Dr. Gibbs. A word or two must be given of his record.

Seventy-three years ago in February he was born in New York City, and after graduation at Columbia and study in Europe, he became a teacher of chemistry. In 1849, a date when several of the members of the Academy were not yet born, he was called to the chair of chemistry and physics in the College of the City of New York, and, in 1863, he went to Cambridge to accept the Rumford professorship in the Lawrence Scientific School of Harvard University. Having served there for more than a quarter of a century, he was made emeritus, and then retired to his home in Newport, where he devotes the leisure of his maturing years to the prosecution of original investigations. During the civil war he was a member of the executive council of the United States Sanitary Commission, and to him credit is given for the idea out of which the Union League Club has grown, of which he is the senior honorary member. In returning to its earlier traditions and choosing to its highest office the most distinguished of its members, the Academy has adopted a course that cannot but be of benefit to it.

A home secretary was also chosen at the recent meeting. Asaph Hall, who found the moons of Mars for the World in 1877, and achieved fame at the same time, was continued in the place that he had so acceptably filled for many years. The headquarters of the Academy are in Washington, and therefore it is desirable that the office of the secretary should be there also. Professor Hall was for many years connected with the United States Naval Observatory, and is now on the retired list, with leisure at his command.

In addition to the officers mentioned, George J. Brush, of the Sheffield Scientific School; Benjamin A. Gould, of Cambridge, Mass.; Simon Newcomb, of the United States Nautical Almanac; Ira Remsen, of Johns Hopkins University; George L. Goodale, of the botanical department of Harvard University; and Othniel C. Marsh, of the Peabody Museum of New Haven, were elected new members of the council.

Interest was not only confined to the election of new officers, for it extended to the new members who were chosen. Notwithstanding the number of vacancies, never more than five new members are chosen to the Academy at one time, and members can only be elected at the stated meeting. No candidates have been chosen since 1892, but this year four were agreed upon. They were: William L. Elkin, of the astronomical department of Yale University; Charles S. Sargent, who fills the chair of arboriculture in Harvard University, Cambridge; William H. Welch, of the Johns Hopkins University, whose recent researches in biology have been so valuable, especially in the direction of determining with exactness the presence of rabies in persons bitten by animals afflicted with hydrophobia; and Charles O. Whitman, whose researches in marine life have resulted in his recent appointment to the University of Chicago.

Besides the home members, three foreign associates were chosen. They were: Prof. Rudolph Lenckart, who for so many years has been in charge of the Zoological Institute in Leipsic, Germany; Prof. Sophus Jie, the famous Norwegian astronomer, who now fills the chair of that science in Leipsic; and Prof. Julius von Sachs, the director of the Botanical Gardens in Wurzburg, Bavaria. It is perhaps well to add that foreign membership is likewise restricted, and there are never more than fifty foreign members.

The Academy has also a substantial way of honoring scientists, for it is the custodian of several trust funds, from the interest of which gold medals are awarded from time to time for discoveries or advances made in special branches of science. Conspicuous among these is the Watson medal, derived from a fund of $13,000 left some years ago to the Academy by James C. Watson, from the interest of which "a medal is to be prepared to be awarded to the person in any country who shall make any astronomical discovery or produce any astronomical work worthy of special reward and contributing to the progress of astronomy." Four times has this medal been given; first to Benjamin A. Gould in 1887; then to Edward Schoenfeld, of the University of Bonn; then to Arthur Auwers, of Berlin, and last year it was awarded to Seth C. Chandler, of Cambridge, Mass., for his researches on the variations of latitude and the variable stars. The public presentation of the medal took place in Washington this year. The medal is accompanied by a gold purse of $100.

A medal resulting from a fund left to the Academy by Frederick A. P. Barnard, who for so many years was president of Columbia College, valued at $200 and known as the "Barnard Medal for Meritorious Service to Science," a copy of which is to be presented at the end of "every five years to the person who, during that period, shall have made such discovery in physical or astronomical science, or such novel application of science to purposes beneficial to the human race, as shall be deemed the most worthy of such honor," is also at the disposal of the Academy. The first award of this medal was made this year, and the fortunate recipient was Lord Rayleigh, to whom it was given for his discovery of argon in the atmosphere.

Comparatively few papers were read at the recent meeting. In fact, the original programme contained only twelve titles; but others were announced subsequent to the arrival of out-of-town members. The scientific session, which is held in the autumn, is more likely to afford a larger number of contributions from the members. It will be held on October 20, in Philadelphia. One feature of the Academy that deserves a word, in conclusion, is that of the reading of biographical memoirs of each deceased member. This year one on Dr. Lewis A. Rutherfurd was read by Benjamin A. Gould.

George M. Phelps.

Seldom has death occurred with more sudden stroke than in the case of Mr. George M. Phelps, president of the Electrical Engineer. He was at the office of the journal on April 6, busily occupied with his duties, but suffering from a cold which kept him at home the following Monday. His associates attached no importance to it, but pneumonia set in swiftly and they, with a host of other friends, were dumfounded to learn that he had succumbed to the disease on Thursday afternoon.

Mr. Phelps was born at Troy, N. Y., in 1843, and received there a public and high school education, which he supplemented by continuous study through life. In 1861 he became connected with electrical interests in the shops of the American Telegraph Company, of which his father was superintendent up to its absorption by the Western Union Company in 1866. It will be remembered that the senior Phelps was one of the distinguished and successful inventors in the first telegraph group—a worthy companion of Morse, Vail, Bain, Hughes and House, and one whose work still stands in the Phelps ticker, Phelps telephone, Phelps printer and other apparatus. The son closely resembled the father in a love of beautiful mechanism and in a fine sense of accuracy and finish in the construction of electrical devices. From 1871 to 1879 the two were associated in the conduct of the Western Union factory in New York, and when the latter shop was given up, Mr. G. M. Phelps, Jr., was appointed superintendent of the New York factory of the Western Electric Company, a position he held until December, 1885. Early in 1886 he joined Mr. Franklin L. Pope, an old friend, in the conduct of the Electrician and Electrical Engineer, then published monthly. He took so kindly to electrical journalism that he acquired a proprietary interest in the property. When in 1890 the Electrical Engineer was expanded into a weekly and its business was incorporated, he was unanimously elected its president. He filled that capacity down to the day of his death, taking the most active part in the business management of the paper. Besides this, he was a frequent contributor to its editorial pages, rendering invaluable literary and technical service. Of many questions he was an easy master, and his judgment was at all times sound and keen.

Electrical Appliances in the Japanese War.

The war between China and Japan has shown that the Japanese readily turn to account any advantage offered by scientific appliances. Their seizure of the telegraph lines in Corea strengthened their position at once, and any breaks were quickly repaired by men who had been trained in actual construction as well as the manipulation of the instruments. The Japanese are facile copyists, and have brought the telegraphs of their insular kingdom to such a state of perfection since their introduction in 1870, that there is hardly a point on the vast coast line which could not be put into communication with the capital in a short time should a hostile fleet be sighted.

In field telegraphy the Japanese have made great advances. Their instruments are modeled upon the latest European forms. The poles are made in sections, the bottom one being provided with a brass foot to be forced in the ground, and the wire runs out from reels carried on light hand barrows. The telephonic system of police and fire alarms in Japan is very complete. The greater number of the Japanese vessels are lighted by electricity, and the skillful manipulation of their search lights in the war has excited favorable comment. Owing to the war, many of the lights and beacons have been extinguished on both the coasts of Japan and China, and false lights substituted, so that navigation has become perilous. The "submarine sentry" has rendered efficient aid in preventing disasters. This recently invented electrical instrument gives warning to a vessel going ten knots per hour when the depth of water falls below twenty fathoms, so that the usual soundings may be taken.

© 1895 SCIENTIFIC AMERICAN, INC.

PURDUE UNIVERSITY, LA FAYETTE, INDIANA.

One of the most interesting and, at the same time, one of the most important problems of the last quarter of a century has been that concerning the nature of the work to be done in the higher educational institutions. The value of that system which had been pursued in colleges for centuries began to be seriously questioned, and out of this questioning grew the conclusions that institutions were needed differing radically in ultimate purpose as well as in curricula from those already existing. Out of this belief arose the various schools of technology which have been such an important factor in the educational progress of this generation.

The establishment of such institutions led to problems of extreme intricacy, and the various solutions of these problems rendered the work of these schools, for many years, largely experimental and tentative. From the results of these experiments, however, we have the technical school of to-day, which, with its magnificently equipped laboratories and its faculty of specialists, is each year making possible new applications of science, to new industries, and to new problems of everyday life.

In the central States the growth and development of technical schools within the past decade has been marvelous. These schools have been able to utilize the experience of older institutions, and, by avoiding the errors of the earlier experimental years, have reached in a very short time the highest degree of efficiency. Recognizing the importance of the work of such schools we give in this issue a description of Purdue University, at La Fayette, Indiana, which stands perhaps as the most prominent type of such schools in the West.

A visitor at Purdue cannot fail to be impressed with the number and excellence of its laboratories. In the department of science are laboratories for chemistry, biology, geology, physics and art; the agricultural department boasts of a fine agricultural experiment station; and the engineering department possesses unusual facilities for laboratory practice in mechanical, electrical and civil engineering. Some of the engineering laboratories have already been described and illustrated in these columns* and others constitute the subject of the present article.

Two years ago there was erected a large building for the accommodation of the engineering departments. A few days after its dedication this building, with its acre and a half floor space and its elaborate equipment, altogether representing an investment of nearly $200,000, was swept away by fire. The loss was severe, but through the wise administration of Purdue's energetic president, Dr. James H. Smart, it has been made the basis of a new development. A large amount of new apparatus and machinery was soon running in temporary quarters. The wood room, foundry, forge room, machine room, the engineering laboratory, and the new annex laboratory for locomotive testing, were all in complete order before the beginning of the present school year, less than seven months after the fire. The construction of the front portion of the building, including the tower, is now going on, and the whole building will be entirely completed by the first of next October. A view of this building from a photograph before the fire is given on our first page.

The incidental gain which has been brought about by the fire is to be found in the improved character of the equipment. The machinery is new, its arrangement is improved and the amount of apparatus in all departments has been greatly increased.

The apparatus for work in steam engineering consists largely of typical engines. Each experimental engine has its full complement of accessory apparatus for determining the performance of the machine. Altogether there are in the laboratory 36 steam cylinders, aggregating about 1,500 horse power; six friction brakes, which together are capable of absorbing 1,000 horse power; and six surface condensers.

Among the important experimental steam plants may be mentioned a large triple expansion Corliss engine, a Buckeye engine, a straight line engine, two Atlas engines, a Westinghouse compound engine, a pair of Baldwin compound locomotive engines, a De Laval steam turbine and a locomotive testing plant.

The locomotive testing plant occupies an annex laboratory and consists of an ordinary locomotive mounted in such a way as to allow its action to be studied and its performance tested while the engine is run at any desired speed and under any load, the conditions being similar to those of the track. The locomotive has 17 by 24 inch cylinders and weighs 85,000 pounds. When in use, it is fired and its motion controlled precisely as if it were upon the road, and while thus run its performance may be tested with the same accuracy which attends the testing of any stationary plant. All parts of the mount are adjustable to suit the dimensions of any locomotive whatsoever. Purdue's engine may be readily run out of the laboratory and any locomotive from any part of the country may take its place. It is expected that from time to time different locomotives will be available for the use of students.

For determining the strength and other physical properties of constructive materials, the laboratory has three large machines, one of which is of 300,000 pounds capacity and of a size sufficient to allow tensional and compressional tests to be made on specimens 8 feet in length.

The several pumps, motors and other machinery making up the equipment for work in hydraulics are grouped about an experimental stand pipe. The pumps draw their supply from a low-level cistern and deliver to the stand pipe. Water from the stand pipe may be used to supply hydraulic apparatus, or it may be discharged directly into an iron weir tank, from which it flows to the low-level cistern. The combined capacity of the several experimental pumps is about 1,000 gallons per minute.

The laboratories of the electrical department occupy a building by themselves. The dynamo laboratory contains over twenty dynamos and motors of different types and outputs, aggregating over 200 horse power. For direct current working, there are both incandescent and arc dynamos and motors of different voltages. For alternate current working, there are alternators and multiphase machines of different outputs and a large equipment of transformers of nearly every American type.

The circuits from all machines, instruments and pieces of apparatus throughout the pier rooms and laboratories of the electrical building can be connected to a large switchboard providing 400 terminals. By this means, any desired combination of machinery, apparatus and instruments may be readily secured.

The equipment of the civil engineering department affords the student abundant opportunity for making himself familiar, by actual use, with the excellent assortment of surveying instruments, embracing those usually employed in actual work, as well as those used in geodetic and astronomical observations.

In connection with the work in civil engineering, courses are offered in architecture and in sanitary engineering.

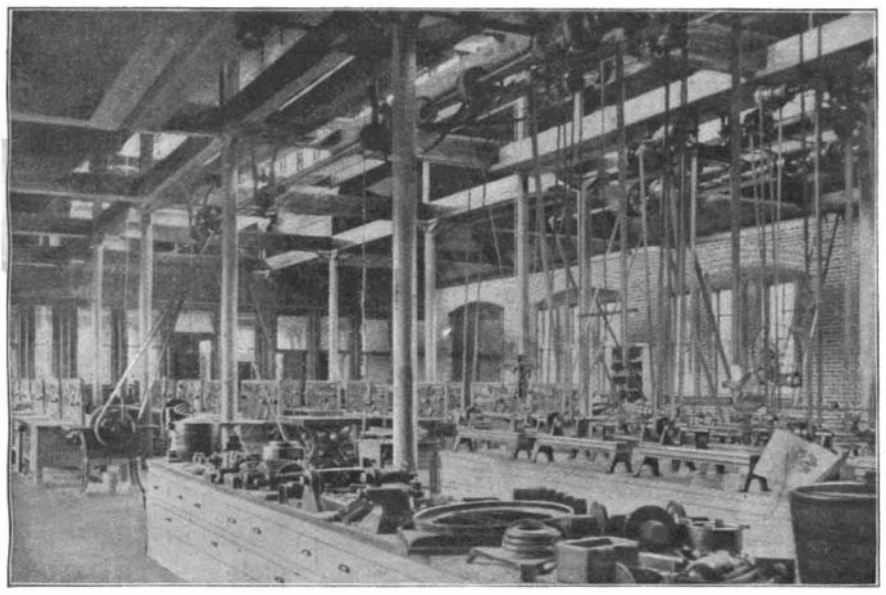

ENGINEERING LABORATORY—THE WOOD ROOM.

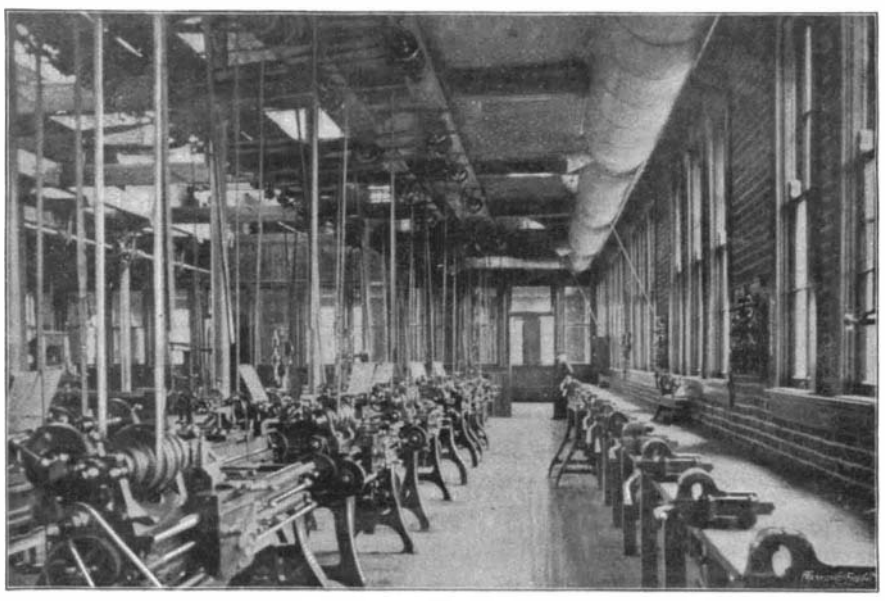

ENGINEERING LABORATORY—THE MACHINE ROOM.

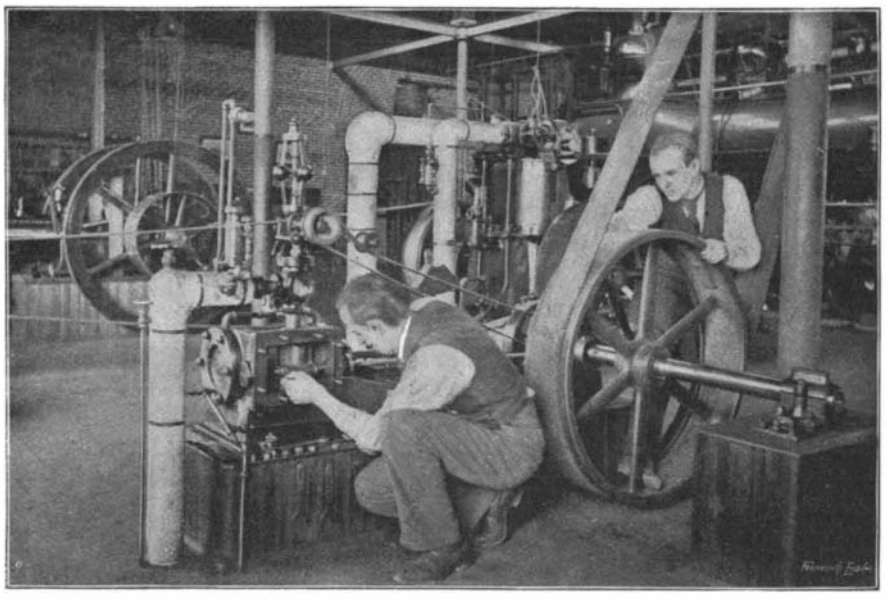

ENGINEERING LABORATORY—VALVE SETTING.

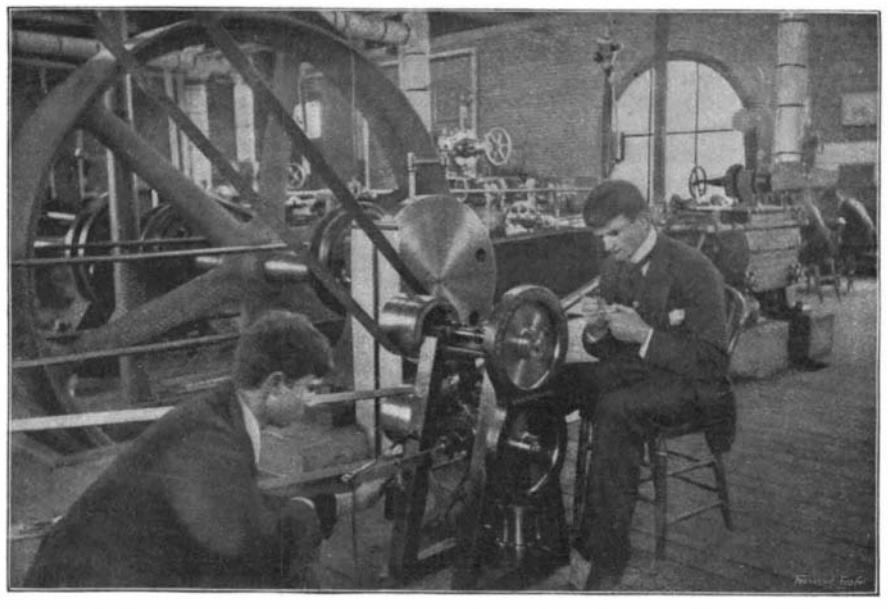

ENGINEERING LABORATORY—PRACTICE WITH TRANSMISSION DYNAMOMETER.

A GOLD medal of the value of $200 is offered by the Bologna Academy of Sciences for the memoir describing the best system or apparatus for putting out fires by chemical, physical or mechanical means. The papers must all be in by the end of May, 1896, and may be written in Latin, French, or Italian, or in any other language if accompanied by an Italian translation.

* May 14, 1892.

© 1895 SCIENTIFIC AMERICAN, INC.

AN IMPROVED WATER MOTOR.

This is a wheel which may be run when either partially or entirely submerged, is designed to be very efficient in proportion to the speed of the current, and has a very simple and easily actuated mechanism for throwing it into and out of gear. It has been patented by Mr. Benjamin F. Rathbun, No. 99 Winslow Avenue, Buffalo, N. Y., and its inventor reports having made some highly satisfactory tests of its efficiency. On a common shaft is a series of wheels, as many as desired, according to the width of the stream, there being on the sides of the wheels outwardly swinging gates adapted to close into recesses in the sides of the wheels when the motor is not in gear. The end wheels have gates on their inner sides only. The gates on one side of a wheel are connected together by chains, so that when one gate swings out to the current it pulls the next one open.

Opposite the gates are holes preventing excessive suction and permitting the current to enter and assist in turning the wheel, but the holes on the end wheels have their outer sides partially covered by deflectors. When the gates open, their inner edges strike against the teeth of ratchet wheels on the shaft, these teeth serving as abutments. Parallel with the shaft are rods on which are arms adapted to turn opposite the gates to hold them closed, but which may also be turned back of the gate hinges to permit the gates to swing outward, as shown in the illustration, which shows the gates as they would appear in a tide or two-way current, while in an ordinary stream the gates on the lower half of the motor would open while those on the upper half would close. The rods parallel with the shaft have end crank arms projecting through slots of two concentric wheels, the outer one of which has teeth to engage a pinion, and these wheels being movable in relation to each other. The gates are held normally locked by the parallel rods, but by pushing the pinion into engagement with the outer wheel the gates are permitted to swing into the current. The machine is thrown out of gear by a pawl or arm engaging the crank arms on the parallel rods. The motor is well adapted to be placed in a stream, to be run by the force of the current.

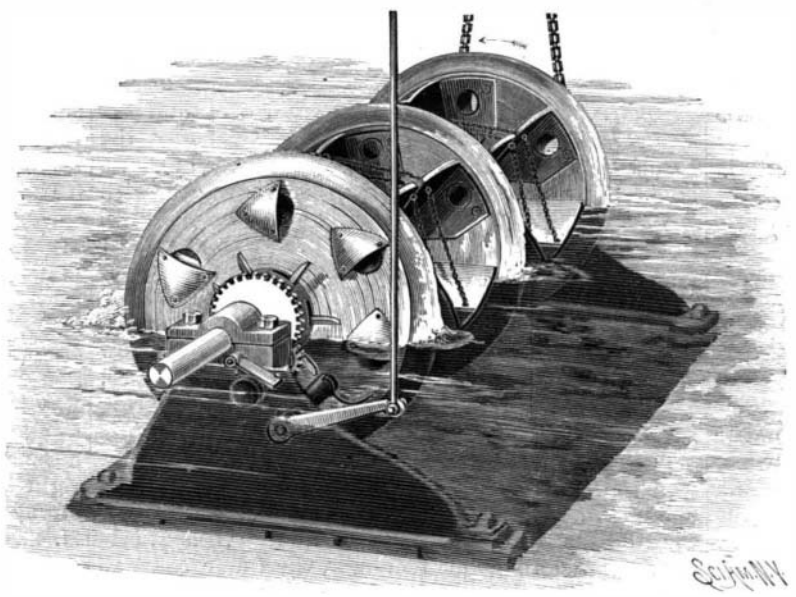

RATHBUN'S WATER MOTOR.

THE HOTEL MAJESTIC, NEW YORK.

New York possesses some of the finest hotels in the world, and to the Waldorf, the New Netherlands, the Savoy, the Holland, the Imperial and the Plaza, has recently been added the palatial hotel on Central Park West, between Seventy-first and Seventy-second Streets, the Hotel Majestic.

The structure is 150 by 204 feet and the height of the twelve stories is 165 feet. The building, a modified Renaissance structure, is made fireproof and contains 600 apartments. An open exposed court 40 feet wide gives abundant light and air to all the rooms not fronting on the street. Nearly four million dollars were spent in the erection and furnishing of this hotel. The architect was Mr. Jacob Rothschild, who was assisted by Messrs. Reeves and Livingston.

Some of the special features of the hotel deserve attention. A covered driveway for carriages runs entirely through the hotel. The main entrance and foyer are marvels of beauty, being richly decorated in Renaissance designs. The grand salon is furnished in the style of Louis XIV, the dining room in the Empire style of decoration, etc. A spacious winter garden gives the effect of a conservatory. A novel feature is the arrangement of the musicians' gallery, it being so constructed that the orchestra, which plays nightly, may be enjoyed by those in the main dining room, music room, grand assembly, and promenade halls at the same time. In summer the roof garden, occupying a surface area of thirty thousand square feet, offers the guests and their friends a nightly promenade concert, and by day an unobstructed view of the city, the Hudson and the Palisades, while at the door is the Park. The Hotel Majestic is in one of the choicest residence districts, of the city. It fronts directly upon and overlooks the Central Park, with its lakes, trees, green swards, flowers, winding paths, and driveways. The views from the Majestic are wonderful and enchanting.

THE HOTEL MAJESTIC, OPPOSITE CENTRAL PARK, NEW YORK CITY.

Liquid Glue.

Chloral hydrate	250 grammes.
Gelatine	400 "
Water	1000 "

The solution is ready in forty-eight hours, and is said to be excellent for mounting photographs.

The Fate of the Rural Town.

We have heard much in late years of the development of our mountain towns. We have thought the trouble to be in their elevation and the hardness of the soil; but Mr. Fletcher is now telling us in the April Forum that a similar fate is visiting the rural town in such States as New York, Ohio, Indiana, Illinois, Michigan, and Iowa. Indeed, the blight is peculiar to no one section, but extends to every part of the country. The population of the whole country has immensely increased, while scores and hundreds of the rural towns have steadily declined in population and wealth. In view of these facts, we must look for a deeper cause, and that cause we find in the new facilities for travel and transportation. The railway is an immense centralizing power. We are only beginning to awaken to the tremendous significance of this recently introduced material force in our civilization. In its presence all things pass and the whole world is made anew. The immediate results from the introduction of steam as a motive power were felt long ago; the remoter consequences are now being revealed in every cause and in every line of business. The change is nowhere more clearly seen than in the relation of the inland town to the commercial metropolis. When men reached the interior by horse power, by the ox team, or on foot, the rural town had a living chance to advance in population and wealth. For the industrial army which had moved into the wilderness or the open country, the rural village was the new base of supplies. The commissariat must go along with the columns. The large center was too far away. But the coming of the railway abridged distance. It brought the village ten or twenty miles away in touch with the great city, making it a sort of suburb. The outlying depot of supplies is no longer needed; the railway train has taken the place of the country storehouse. Does the change mean the destruction of the rural town? Not at all. The rural town is as important as ever, but in a new way. The railway took up the old base of supplies and carted it away as of no further use. The fortifications around it have been pulled down, and the soldiers of industry who had occupied them have been drawn back to the main base. The industries now find their center, not in the rural village, but in the city a little farther away. What is taken out of the town is simply drawn back into the city. The fictitious importance of the rural hamlet has disappeared, while the agricultural value of the land remains. The agricultural resources of the country must forever be the bulwark of the city. The only peculiarity now is that the city reaches out farther, drawing its supplies, by the aid of steam, not only from an area of five or ten, but of a thousand or three thousand miles around. It draws from the cheapest market, without respect to distance.—Boston Standard.

The Trolley in Rome.

At the present time omnibuses and a few horse cars constitute the principal means of travel in the streets of Rome.

A concession has, however, just been granted to the Societa Romana degli Omnibus for the building of an electric road to run from the general post office to the principal railroad station in that city.

Grades of considerable size will have to be overcome. The overhead Thomson Houston trolley system will be adopted, and it is expected to have the line open for business on September 17 of this year.

© 1895 SCIENTIFIC AMERICAN, INC.

Freight Car Doors.

At the January meeting of the Central Railway Club a paper upon the subject of "Freight Car Doors and Fixtures" was read by Mr. J. D. McIlwain, superintendent of the Union Car Company, in which the author presented the claims of a number of door appliances and concluded as follows, in which he represented a committee appointed to consider the subject given in the title of the paper:

"We wish first to repeat the statement made in our previous report, that the coming freight car door, to be perfect in every particular, and satisfactory to both the transportation and mechanical departments, requires the following essential points:

"First, safety; second, protection to the property in transportation, from theft, fire, and water; third, ease of operation; and last, but not least, economy in production and maintenance. We do not believe that the freight car door has yet been produced that embodies all of these requirements perfectly. In our opinion the perfect door should be hung at the top, on antifriction rollers which cannot be derailed. The bottom girders should permit sufficient play between the doors and the car to give the door ease of motion at once after the fastenings are loosened. The fastenings should be designed to close the door tight against the car when locked, and release it when unlocked. There should be a permanent stop or cleat at the back edge of the door when closed, for protection from fire and water. The door posts should be trussed to prevent bulging outward, which is the principal cause of doors binding and the attendant evils. We question if there is a complete door that is not weak in some one of these features, and leave the subject for your digestion."

In the discussion Mr. McIlwain said he thought that door construction was the leading question of today in car design, that is, the providing of "proper doors, properly hung, that will properly protect the property in the car and that will not cost too much for operation and maintenance." The discussion was continued in the March meeting of the club when it was opened by Mr. Perkins, joint freight agent of East Buffalo, who represented the "men who look after the freight and keep track of it." He stated that the number of box cars, not counting those belonging to private car owners, in use in the country was about 512,000, which makes the car doors number over a million. Based upon 200,000 doors opened, closed, and fastened each day, allowing one minute for every complete operation, he figured that it cost $500 per day for this insignificant item, which would become $2,500 if the time occupied was placed at five minutes. This showed the importance of furnishing doors which may be opened, closed and sealed easily and quickly. He spoke of the safety of employes as the matter of first importance in the car door question, applying to the dangers to men in opening and closing the doors as well as those resulting from improperly secured doors upon the road. After enumerating some of the defects which lead to danger of falling doors, he said: "The door of which the least complaint is heard among freight handlers is that hung on rollers or pulleys at the top, with projecting door guides below the bottom of the door and wedge shaped pieces on the bottom of the door to fill guides when the door is closed. These doors always work well, even when bolts that hold pulleys to the door are loose or the door gets old or shaky. . . . Freight men are well satisfied with doors hung this way, and if made a few inches wider than the doorway, the lap over the door post at the back and the door stop in front make the necessary protection against sparks and rain."

New Lake Steamers.

At the Cleveland Ship Building Company's yard, April 20, was launched the steel steamer Chili, built to the order of Captain Drake, of Buffalo; Captain A. B. Wolvin, of Duluth; Wm. Dickinson, of Chicago; Captain David Vance, of Milwaukee, and others. The Chili measures 342 and 324 by 42 and 27 feet. Her engines are triple expansion, 20, 33 and 54 by 40 inches, the two boilers being 12 feet 4 inches by 13 feet. A 12 by 12 inch hoisting engine operates a fore and aft shafting, by which freight is lowered into and hoisted out of the hold. She will be ready for sea about June 1, and will carry 3,200 tons on 15 feet draught.

On the same day the steamer J. J. McWilliams, building at the Wheeler yard, West Bay City, was launched. She is building for the Mitchell-Gratwick syndicate, and is 370 feet over all, 352 between perpendiculars, 42 beam and 27 depth. Her engines are 20, 32 and 55 by 42 inches. Her boilers were made by Wicks Brothers, of Saginaw, and are 13½ by 12 feet. She is expected to be out in about four weeks.

The Detroit Dry Dock Company launched, April 20, at their Orleans Street yard, Detroit, a fine lumber steamer, the Argo, for C. R. Jones & Company, the Fisher-Wilson Lumber Company, and others, of Cleveland. She is a single decker, 203 feet in length, with 185 feet keel, 35½ feet beam and 15 feet depth, and will carry 800,000 feet of lumber on 12½ feet draught. Her engine is a fore and aft compound, 22 and 46 by 36 inches, with cylindrical boiler 12 feet 3 inches by 11 feet. She will carry two pole spars and one stack. She is expected to be out in three weeks and will tow two of the A. G. Comstock's barges.—Marine Record.

AN IMPROVED GASOLINE TRACTION ENGINE.

The illustration represents a gasoline traction engine which has been used in the field for several seasons, doing most efficient service. It is manufactured by the Charter Gas Engine Company, of Sterling, Ill. It is of neat design, strong and well built, the frame being all iron and steel, and the rear axle has roller bearings. The platform is suspended on springs. The steering wheel and levers are within easy reach of the operator, and the traction motion can be reversed instantly. The gearing is arranged to give two speeds, two and a half or four miles per hour.

THE "STERLING" GASOLINE TRACTION ENGINE.

The Prevention of Window Cleaning Accidents.

According to the report of the registrar-general, the number of fatal falls from the window in England alone is eighty per annum, but notwithstanding this fact, little has been done either on the part of the government or on the part of house owners to take means to lessen this unnecessary mortality. In 1892 the corporation of Glasgow passed a by-law enacting that in dwelling houses all window sashes above the ground floor should be hinged or constructed so as to admit of the outsides of the windows being cleaned from the inside of the apartment; and we believe that an old act, passed in 1847 and applying to English boroughs, made it an indictable offense to allow any one to stand outside a window, with a fine of 40s. payable by the occupier. But this act is undoubtedly a dead letter in the country, and would anyhow be impracticable in a large city like London. The proper remedy obviously lies in the fitting of the window itself. If this can be so constructed that the operation of cleaning can be performed from the inside, while the framework is both air and water tight, the safety of the cleaner is assured, but before any such innovation can become popular among those who have grown up among sashes and are returning to casements, it must be made clear that the new invention does not lose in comfort for its user what it may gain in safety for his servants. --The Lancet, London.

The Gateway to Lake Superior.

For many years the United States has had possession of the gateway to Lake Superior, for such may be termed the lock at the St. Mary's Falls Canal, and quite as much so as Gibraltar is the key to the Mediterranean.

It appears that Canada, or rather the imperial government, could not rest quietly under this state of affairs, which in a sense debarred access to their territory on the north shore of Lake Superior. This feature was brought strongly to the front a quarter of a century ago, when Canadian vessels with military supplies for Manitoba were refused permission to lock through the canal, which was then under the jurisdiction of the State of Michigan.

It may be assumed that from the above episode sprung the idea to have a national waterway whereby Dominion tonnage could pass on to Lake Superior under all conditions, and now this has been accomplished. Furthermore, it will be remembered that three seasons ago the Canadian government, by an order in council, so changed the rules governing the imposition of tolls in the Welland Canal, their gateway to the coast, that a rebate to the tolls would only be allowed to vessels that discharged their cargoes at a Canadian port. While the new order appeared all right and just on the face of it, there was really a strong discrimination against the port of Ogdensburg, N. Y., and as a consequence against American tonnage consigned there, and this meant the building up of Kingston, Ont., as a terminal lake point at the expense of Ogdensburg. Remonstrance on the part of commercial and transportation interests with the Dominion government proved futile, and finally a law was enacted by Congress exacting toll from all Canadian vessels passing to or from Lake Superior. This state of affairs lasted only about five months, when such pressure was brought to bear on the Dominion government that the order in council was abrogated relative to the Welland Canal tolls, and at the same time the American "Soo" Canal was again thrown open to the use of Canadian vessels free of all charges.

Canada is now independent regarding access to her Lake Superior ports. She has a splendid canal in her own territory and need not be under any further obligations to the United States for permission to reach her northern limits. In addition to this feature she holds the key to the coast via the St. Lawrence route, and with these facts in mind it has been a consideration for some time past to know whether the Welland Canal tolls would not be put in force again, seeing that the Dominion could no longer be checkmated by the United States in the same manner as formerly, and it is of particular interest to note that Canada seems to have no inclination at this time to reimpose burdens on American commerce, for not only is the new canal at Sault Ste. Marie declared free of tolls for all tonnage, but the Welland and St. Lawrence Canals remain as formerly relative to toll charges. This is the more magnanimous on the part of Canada considering that she has spent vastly more money, considering the meager population of the country, in improving natural and forming artificial waterways than has the United States, and the announcement that the Canadian St. Mary's Falls Canal is free to all vessels shows the spirit and feeling which the Dominion bears toward this country, for, of course, only American tonnage is meant when it is said that the canal is free to all.

Such concessions, or international courtesies, if so they may be called, will no doubt go far toward smoothing over rough places which crop up from time to time in the usual order of events, and questions involving international rulings are much easier settled in an amicable manner when a mutual feeling of friendliness predominates, and such must be regarded the recent action of Canada in throwing open the new Sault Ste. Marie Canal.—Marine Record.

THE average production of ice, by means of the expansion of cold air, in what are known as cold air ice machines, is two and one-half tons of ice per ton of coal. Other machines vary from two and one-half tons to twelve and one-half tons of ice per ton of coal.

© 1895 SCIENTIFIC AMERICAN, INC.

Notes on Aluminum.

From a large number of experiments made by the author, the following results have been obtained:

Alloys Containing Gold.—Alloys of aluminum and gold, although interesting, are of little practical use except for decorative purposes. With 6 per cent of gold, the alloy is as white as pure aluminum, but more brittle; and with 10 per cent the product has a light violet brown color, is harder than aluminum, and only works well at high temperatures. A 15 per cent gold alloy is almost white, with a violet shade, very soft, and a fine grained metal. An alloy of 50 per cent gold is soft and spongy, and possesses a beautiful violet color; while with 78 per cent of gold it is very brittle, and of a pinkish violet color. With 90 cent of gold, the color is a pale violet, and with 94 per cent it approaches a pink. Alloys containing small percentages of aluminum leave a bright violet color on the cupel under the blowpipe. An alloy of 50 per cent of gold, 45 per cent copper and 5 per cent aluminum takes the color and polish of 14 carat gold, but easily tarnishes.

Alloys Containing Silver.—Alloys of aluminum with 4 to 8 per cent of silver are harder than pure aluminum, and not brittle, and take a fine polish. The color is similar to that of fine silver; they are used for medals, charms, etc.

Alloys Containing Nickel.—An alloy of 50 per cent nickel and 50 per cent aluminum is of a dull gray color, very porous, and too brittle to use. The following alloys of copper, nickel, and aluminum are very strong, hard, and fine grained: With 66 per cent of copper, 24 per cent of nickel, and 10 per cent of aluminum an alloy is formed which takes a fine polish, and has the color of 10 carat gold. With 55 per cent of copper, 33 per cent of nickel, and 12 per cent of aluminum the color is a beautiful golden brown; and with 72½ per cent of copper, 21¼ per cent of nickel, and 6¼ per cent of aluminum, the color becomes richer and deeper.

Melting of Aluminum.—The temperature should be kept even, and not much above the melting point of the metal, which should be fed into the crucible in small pieces. The most useful flux is a little tallow. A crucible mainly of siliceous material must not be used, as the aluminum attacks the silicon. In alloying, the aluminum is put into the crucible after the other metals have become liquid.

Restoration of the Mat.—Aluminum can be cleaned and its mat restored by dipping for 1¼ minutes in a solution of 3 ounces of caustic potash or soda in a quart of water, then washing well, and dipping in a solution of three parts nitric and three parts sulphuric acid (by volume).—G. F. Andrews, J. Amer. Chem.

The Wonders of the Joints.

Dr. J. H. Hanaford, in the Phrenological Journal for May, gives the following interesting facts relative to a most important function of the human body:

The more than two hundred bones of the body would be of but little service to us aside from their joint connections. Some of these are of a remarkable character.

The twenty-four ribs are attached to the spine by a kind of immovable joint, the seven upper ones to the breast bone, by cartilages; three, more movable, are tied to each other and then fastened above, while four are "floating ribs;" these, with the six above, affording elasticity and motion in the act of breathing, accommodating themselves to the varying size of the chest.

In the place of these ribs a solid plate of bone would be cumbrous, heavy, not admitting of the motions needed at this part, while the curved and elastic ribs afford similar protection to the organs within. The wedge-shaped bone of the lower spine fits firmly into a corresponding cavity in the hip bone—a grand foundation bone of great strength, admirably adapted to its use.

Of the two other kinds of joints, the "ball-and-socket" and the "hinge," much might be said if space would admit. The ball-and-socket is well represented by the joint at the shoulder, which allows the arm to move in all needed directions.

That the arm may have a wider scope, the socket is very shallow, so that when "out of joint" it may be easily put back again, almost by the unfortunate boy, if he only understood the matter. (It would not be safe for him to attempt to walk on his hands, instead of his feet, as the "ball" would slip out too easily for safety.) In this respect the hip joint differs, the socket being quite deep, at the bottom of which there is a round, strong cord, which is so attached to the thigh bone as to prevent dislocation, unless from a severe accident. In consequence of this depth the leg is not afforded much movement, its principal movement being that of walking—a boy need not kick! This depth is needed to bear the weight of the body, with that of burdens which must be carried, in active life. This "ball" cannot get out without breaking the cord, in which case it is useless to put the "ball" back. In the case of a dislocation, the "ball" being pressed up, nature (God in nature) by the aid of the nerves, blood, etc., performs a miracle, making a "socket" around this "ball," so that, after awhile, one can walk tolerably well, always limping, however, because the leg has become shorter than the other.

The other joint is the "hinge joint," like that of the common door, admitting of motion only forward and backward. In the case of the arm, which demands so many motions, the two joints are supplied, making the limb wonderfully useful, adapting it to various, if not numberless, employments. Think of the friction of walking naturally resulting from our motions, particularly of the bones of the leg and thigh, caused by the weight of the body! Indeed, if these were made of steel, without any means of lubrication, only a few years would be required to wear them away so that a man would be cut down to one-half his height. To prevent this, the ends of the bones are provided with a smooth, gristly matter, which is repaired as fast as it wears away, the joint supplying its own oil, with no care on our part. Thus the wonderful machinery of the body goes constantly on.

INSTRUMENT FOR PLACING TORPEDOES.

One of the indispensable danger signals used on railroads is the torpedo, which is exploded by the passing train, but to place the torpedo on the track in position to be acted on by the wheels of the train to be signaled, it has heretofore been necessary to stop the train leaving the signal to enable a man to place it in position on the rail.

Mr. James D. Seamands, of 623 Buena Vista Street, San Antonio, Texas, has recently patented a very simple device by means of which the torpedo may be placed on the rail by a man on a moving train. The complete instrument is shown in Fig. 1. In the tubular end of a long handle is placed a spring pressed follower, carrying at its lower end a foot of soft material, such as rubber, which rests on the upper surface of the torpedo. The latter, which is of the usual description, is furnished with a spring capable of embracing the head of the rail when allowed to assume its natural shape. The spring is held in an extended position by the downwardly extending arms of the instrument, as shown in Fig. 1.

SEAMANDS' TORPEDO PLACER.

The operator grasps the handle and carries it in position to hold the torpedo-supporting spring over the head of the rail. By a quick downward pressure the handle is disengaged from the torpedo spring, which instantly contracts and embraces the rail head, as shown in Fig. 2. Figs. 3 and 4 are enlarged sectional views clearly showing the construction.

World's Fairs in 1896.

Two countries will hold world's fairs in 1896, one in the old world and one in the new. The Exhibition of Industries and Fine Arts which will be opened April 2, 1896, near the castle of Chapultepec, city of Mexico, will be of special interest to Americans. Under the enlightened rule of President Diaz, Mexico has had an opportunity in the last few years to cultivate her great resources, and is now in a position to look for purchasers of her products and bid for the articles she requires. She needs agricultural and mining machinery, printing presses, pianos and canned goods as well as thousands of other articles which the United States is in a position to supply in return for her minerals, cereals, fruits, and coffee. Important inducements are offered to exhibitors, such as the importation of goods in bond and low transportation rates. Senor Ignacia Bejarano, the official mayor of the federal government, is acting as director-general. California, Oregon, Nebraska, Kentucky and Iowa have already appointed State commissioners to look after their interests and a stock company has been organized in Chicago to build the exposition palaces.

An industrial exposition will be held in Berlin in 1896. Special reference is to be paid to exhibits which shall illustrate the history of firearms. One of the features will be an exposition of sports, including a museum of rare objects of the chase and hunting trophies. A dog show will also be held.

BY means of the quadruple effect distilling apparatus thirty-six pounds of water may be evaporated with one pound of coal.

Lightning Freaks.

As the season for lightning flashes is upon us, it may be well to call attention to one or two points and to urge their careful observation and study. The camera has added greatly to our knowledge of these interesting phenomena, and every one in a position to do so should aid in photographing these flashes. We have the multiple flash, the dark flash, the ribbon flash and so on, and these have caused widespread discussion.

Some photographs show a series of parallel flashes following precisely the same path at some distance apart. That separate discharges can make such similar paths for themselves side by side seems incredible. In July, 1892, on an exceedingly hot afternoon at Bay Ridge, Md., a violent thunder storm passed quite near my point of observation. At one point in the storm I saw flash after flash in exactly the same path. There were four or five of these flashes and the whole display lasted more than a second. If a camera were moved very rapidly over such a display, it might give the many distinct parallel flashes, and if it should be moved with less speed, such a broad ribbon flash as is illustrated in La Nature for March 2 might be secured. This "poly flash" or "poly phleg" (Greek, many and flash) should receive some designation to distinguish it from the so-called "multiple flash."

Observations of lightning with the unaided eye may add a good deal to our knowledge. It is highly probable that the estimates of the duration of an ordinary flash of 0·002 to 0·0001 of a second are far too small. It is certain that no broadening of a single flash as sudden as that could ever be had upon the swiftest moving camera. To the unaided eye most single flashes are not more than 0·01 of a second. It is also entirely possible to follow the direction of motion of a flash in the sky.

On April 13, 1895, while a thunder storm was passing directly overhead, I observed a sharp lightning stroke, and, simultaneous with the sound of the thunder, which came four or five seconds later, there was an unmistakable increase in the air pressure. This was not due to the wind, as the air was still at the time. It may be of a good deal of value to obtain additional observations of this kind. H. A. HAZEN.

Cycling and the Heart.

The Popular Science Monthly for May condenses from a lengthy paper on bicycling by Dr. B. W. Richardson, who represents cycling as differing from other exercises, in that it tells primarily and most distinctly upon the heart. It produces at once a quickened circulation, though the riders may not be conscious of it; and this accounts for the astonishing journeys a cyclist can undertake, and his endurance as against sleep. Although the heart increases in action and sometimes undergoes enlargement, the author has never seen a rider embarrassed by overstrain of it, faintness, breathlessness, angina or vertigo, so as to oblige him to dismount. Indeed, he had known a practiced rider who climbs hills on his machine, but could not mount a flight of stairs on his feet without breathlessness and a slight palpitation; he had never seen a sudden death from cycling. He had met with instances in which, after several years of cycling, there was evidence of heart disease, with general languor and inability to sustain fatigue if exercise were again tried on the machine; and, on the other hand, he had known examples in which even an octogenarian had kept up the exercise in a moderate degree apparently with benefit to the circulation. He had seen in some cases apparent benefit arising from cycling even where there was an indication of some disease affecting the circulation, and had known good to arise from it in cases of varicose veins and of fatty degeneration, and in conditions of anæmia. In other cases excessive cycling had been a definite cause of injury to the circulation. The author believes that cycling in moderation may be permitted and even recommended to persons with healthy hearts; that it is not necessary to exclude it in all cases of heart disease, while it may be even useful where the action of the heart is feeble and signs of fatty degeneration are found; that, as the action of cycling tells directly upon the motion of the heart, the effect it produces on that organ is phenomenally and unexpectedly great compared with the work it gets out of it; that the ultimate action of severe cycling is to increase the size of the heart, to render it irritable and hypersensitive to motion; that the overdevelopment of the heart affects in turn the arterial resilience, modifies the natural blood pressure, and favors degenerative structural changes in the organs of the body generally; that in persons of timid and nervous natures the fear incidental to cycling is often creative of disturbance and palpitation of the heart, and should be taken account of; that, in giving advice, it is often more important to consider the peripheral conditions of the circulation than the central; that venous enlargement is often rather benefited than injured by cycling; and that straining to climb hills and meet head winds, excessive fatigue and alcoholic stimulants should be avoided, and the proper number of meals of light, suitably selected food should not be neglected.

© 1895 SCIENTIFIC AMERICAN, INC.

THE VAN BUREN STREET DRAWBRIDGE OF THE METROPOLITAN WEST SIDE ELEVATED RAILROAD OF CHICAGO.

(Continued from SCIENTIFIC AMERICAN of April 27, 1895.)

We recently illustrated the operations of construction of the Metropolitan West Side Elevated Railroad of Chicago, the most impressive example of an elevated railroad system that has as yet been constructed. In our present issue we illustrate the Van Buren Street bridge, an element of the same system, which crosses the Chicago River, supporting two tracks of the Elevated Railroad. The bridge is of the bascule type, opening in the center for vessels to pass through, the trusses rising backward and upward, each one moving in a vertical plane. Its construction is peculiar in the omission of trunnions, the great girders rolling on a segment of a circle, one of which is formed on the backward prolongation of each of them.

On reference to the cut, two small diagrams will be seen illustrating the bridge, open and closed. The rocking operation of the bridge is made clear in these cuts. They indicate two additional features. The working struts, as they are called, by which the bridge is opened and shut, constitute one of these features. One such strut for each half of the bridge is connected to the point representing the center, from which the circular segments are struck, and runs back horizontally or nearly so to the machine for opening. In the two diagrams this working strut is indicated by a single line extending from such center back along the fixed roadbed. The cuts also show how part of the deck carried by the trusses, as they rock backward, descends beneath the level of the fixed decks on either side of the river.

Referring to the general view of the bridge, it will be seen that each section of the bridge comprises three parallel trusses, each with a circular segment. For the circular segments to roll on, there are provided steel ways on which are projections or teeth of steel, which enter pockets in the faces of the segments. This insures alignment of the three trusses in their operation. On the right hand of the picture is seen the portion of roadway extending back of the center of curvature, which portion goes down when the bridge rises; it is cut off obliquely at its rear end, and a latch or link swings over this end, operating as a lock to prevent the bridge from being opened. There are also latches at the center of the bridge.

The mechanism for opening and closing the bridge operates by means of the working strut. This is a bar carrying on its rear portion a rack and running nearly horizontally back from the center of curvature of the circular segment into the power houses. In the power houses are four 50 horse power electric motors, operating a train of gear wheels, the last of which wheels engage with the racks. When a rack is drawn backward, the section of the bridge rises; when a rack is projected forward, the section descends. Within the backward extension of the roadway just alluded to ballast is placed to bring the center of gravity into proper position. The effect of this is that the bridge naturally rests partly open, and if it is stirred from this position, tends to rock back and forth. The working struts are attached by pin connections to the central trusses; one strut operates each half of the bridge.

Assuming the bridge now to be closed, if it is desired to open it, the machinery is started so as to draw the racks backward. As each rack moves, its first effect is

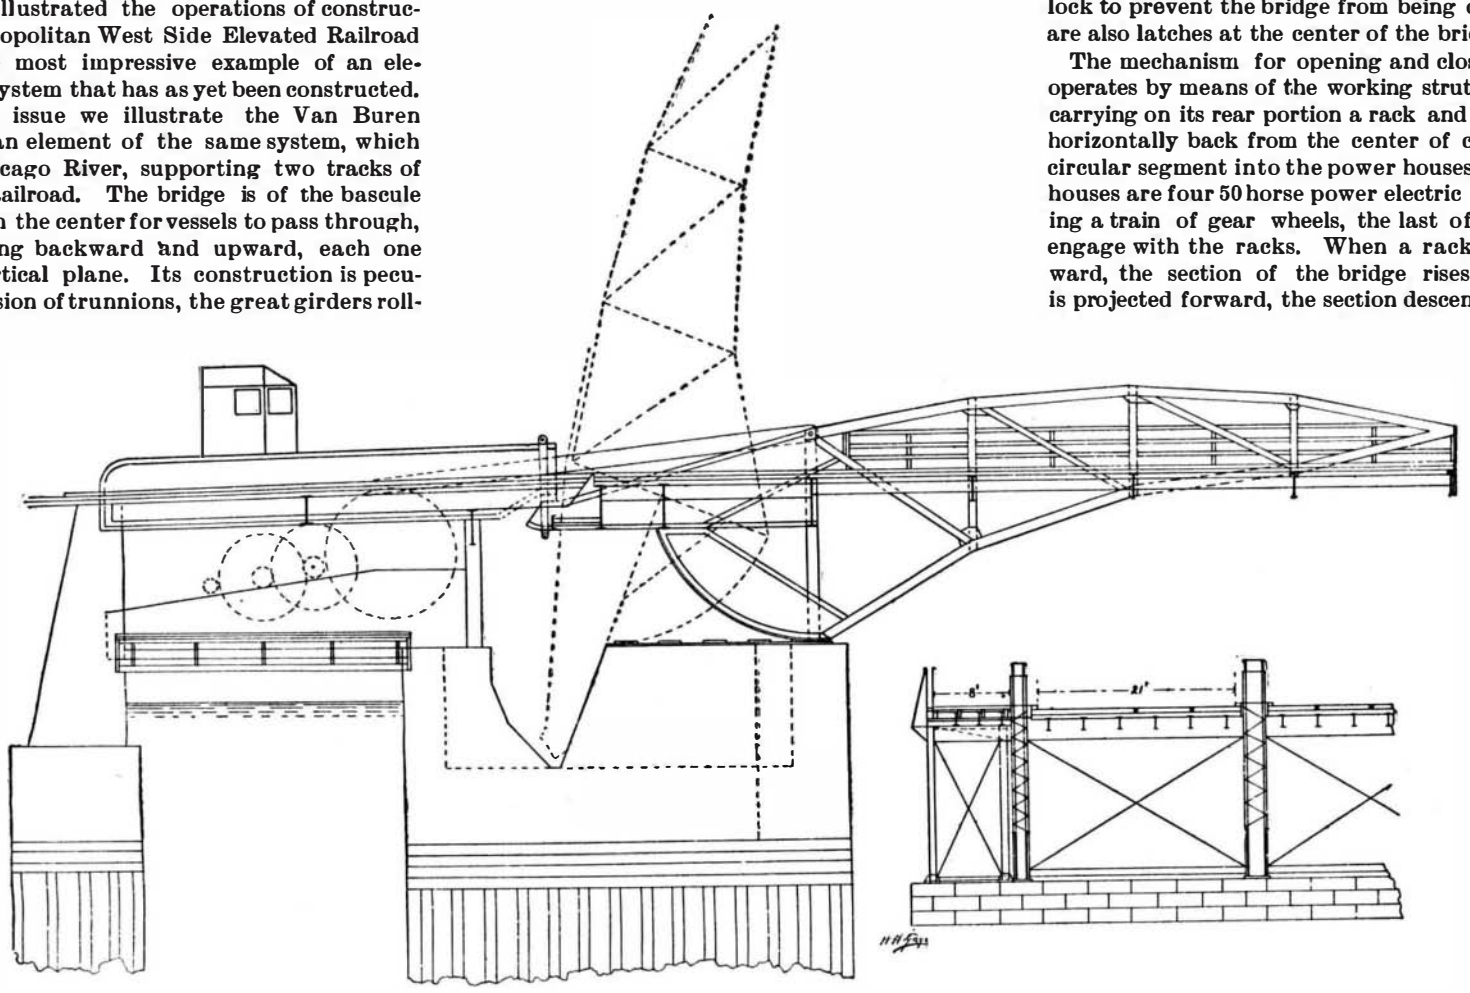

THE VAN BUREN STREET BRIDGE. CHICAGO—DIAGRAM OF CONSTRUCTION.

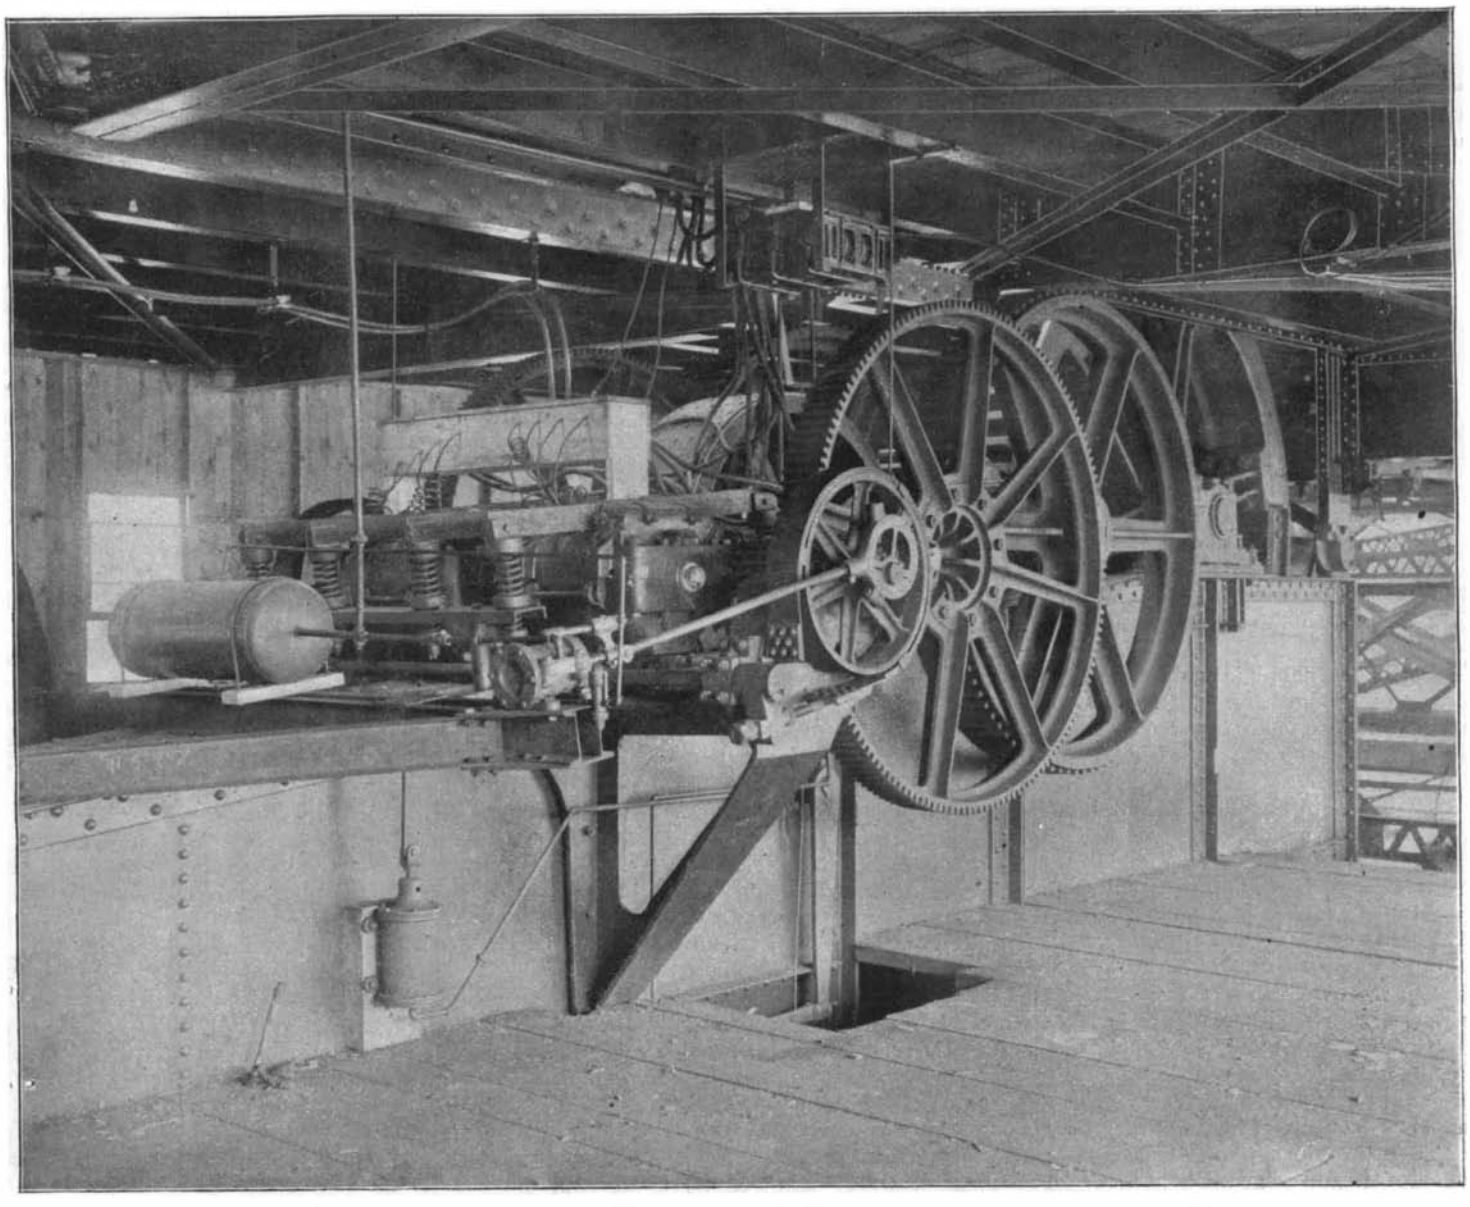

THE VAN BUREN STREET BRIDGE, CHICAGO—OPENING AND CLOSING MECHANISM.

© 1895 SCIENTIFIC AMERICAN, INC.

to revolve a cam by which pin latches at the center of the span are withdrawn and the latches at the heels of the trusses, one of which is shown in the general view of the bridge, are swung backward, leaving the trusses free to move. As the motion continues, the bridge opens, twenty seconds sufficing for the entire operation. In closing, the reverse succession of operations takes place. The pin latches at the center are designed to prevent lateral movement and to insure the ends of the rails abutting in line; the other latches hold the trusses closed. Each truss may be treated as a cantilever, the tail girder representing the anchoring span.

We have referred to the counterpoise weights. They are placed within the tail girders and between them, beneath the railway floor. As these weights are sufficient to prevent the bridge from naturally coming to a horizontal position, in the closing operation force has to be applied to bring the end down. To work each half of the draw span, two of the fifty horse power electric motors are provided, which are wired to operate together or alone. If by any accident the current is cut off, compressed air brakes are automatically applied, which instantly bring the bridge to rest.

In the closing process, before the ends come together the sections are automatically brought to a full stop, so that the final closing has to be performed with special care. A powerful emergency brake is supplied to guard against accidents, which brake can be made instantly to act upon the structure. It is believed that all these precautions and structural features make an accident impossible. Owing to the height of the bridge, it will have to be raised for comparatively few vessels, as most can freely pass under it.

One of the cuts shows the lifting mechanism placed beneath the roadway, the under surface of the roadway or deck forming the ceiling. The general relation of the trusses to the abutments is shown in the larger diagram, giving a view partly in section of the structure, the open position being indicated by dotted lines. The small illustration gives a view of the deck of the bridge. The distant section in this cut is shown partly raised, a further descent of about three feet being required to complete the closing.

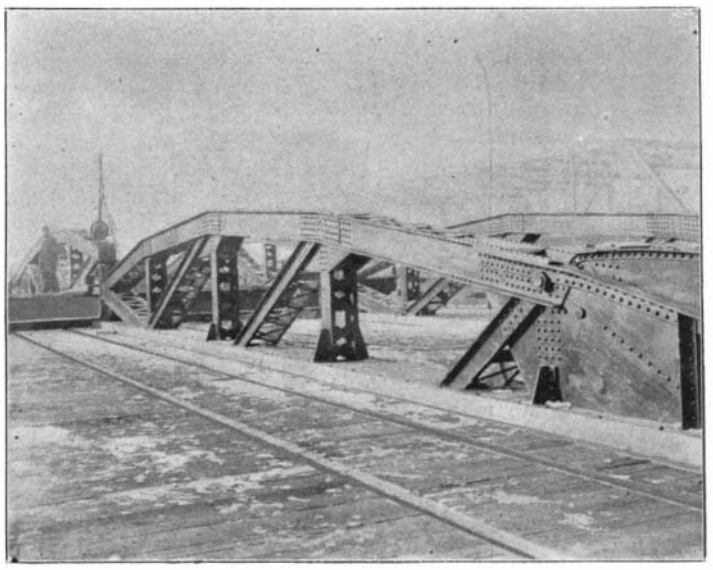

DECK VIEW OF THE VAN BUREN STREET BRIDGE, CHICAGO.

The "Blow Hole," Kiama, N. S. W.

One of the most pleasant as well as famous tourist resorts in New South Wales is situated on the coast some 70 miles south of Sydney. The center of this district is Kiama, a picturesque and thriving town surrounded by rich agricultural country, and which has been built upon an old igneous flow of basalt that has solidified and crystallized into huge columns of what is popularly called "bluestone." This formation is seen to perfection on the west coast of Scotland and north of Ireland at St. Fingal's Cave and other places; and those who are acquainted with the rugged appearance of the coast in these places can form a good idea of the appearance of the New South Wales coast at this point. Kiama, unlike other tourist resorts, can be thoroughly enjoyed in either fair or stormy weather, and those who visit the town when a good gale is blowing have an opportunity of witnessing a sight the like of which does not exist elsewhere on our globe. The famous "Blow Hole" here situated, in the middle of a rocky headland running out into the sea, forms a truly wondrous sight. With each successive breaker the ocean spray is sent shooting up into the air sometimes as high as from 300 feet to 400 feet, descending in a drenching shower and accompanied by a rumbling noise as of distant thunder, which can be heard for many miles around.

This "Blow Hole" is a singular natural phenomenon, and consists of a perpendicular hole, nearly circular, with a diameter of about 10 yards across, and has the appearance of being the crater of an extinct volcano. This is connected with the ocean by a cave about a hundred yards in length, the seaward opening of which is in all respects similar to St. Fingal's Cave on the west coast of Scotland, the same perpendicular basaltic columns forming the side walls of each. Into this cave towering waves rush during stormy weather, and as the cave extends some distance further into the rock than the "Blow Hole," on the entrance of each wave this cavity becomes full of compressed air, which, when the tension becomes too great, blows the water with stupendous force up the perpendicular opening.—Aust. Photo. Jour.

The Palais de l'Elysee, Paris.

The Elysée Palace, where the President of the French republic lives, was built in 1718 by a banker. In 1748 Madam de Pompadour purchased it, and in 1768 Louis XV bought it from her heirs; later, he sold it to the financier Meaujou, the only proprietor that died in it. Louis XVI bought it for $260,000 and gave it to the Duchess of Bourbon, who, in 1790, presented it to the French nation. In 1803 Murat acquired it and gave it to Napoleon I, who was very fond of the garden. In 1814 Emperor Alexander I, of Russia, resided here. Then the Duke of Berry, the Dauphin, lived in it, and, after his death, the baby Duke of Bordeaux. In 1848 it was assigned to Louis Napoleon. Since 1873 Presidents McMahon, Grevy, Carnot, and Casimir-Perier have dwelt in it. Now M. Faure is the master.—Cincinnati Commercial-Gazette.

RAW silk waste machine wipers, instead of the cotton waste wipers heretofore almost universally used, are said to be entirely free from danger by spontaneous combustion, and this one fact should be sufficient to highly commend them to all who have charge of running machinery. These wipers are manufactured by the American Silk Manufacturing Company, of Philadelphia, and their cost in use is lessened, where used in considerable quantity, by means of a special washing compound, enabling the washers to be employed over again as many as eight to twelve times. These wipers are also said to more thoroughly clean the machinery on which they are used, leaving no small detached fibers or shreds on parts wiped.

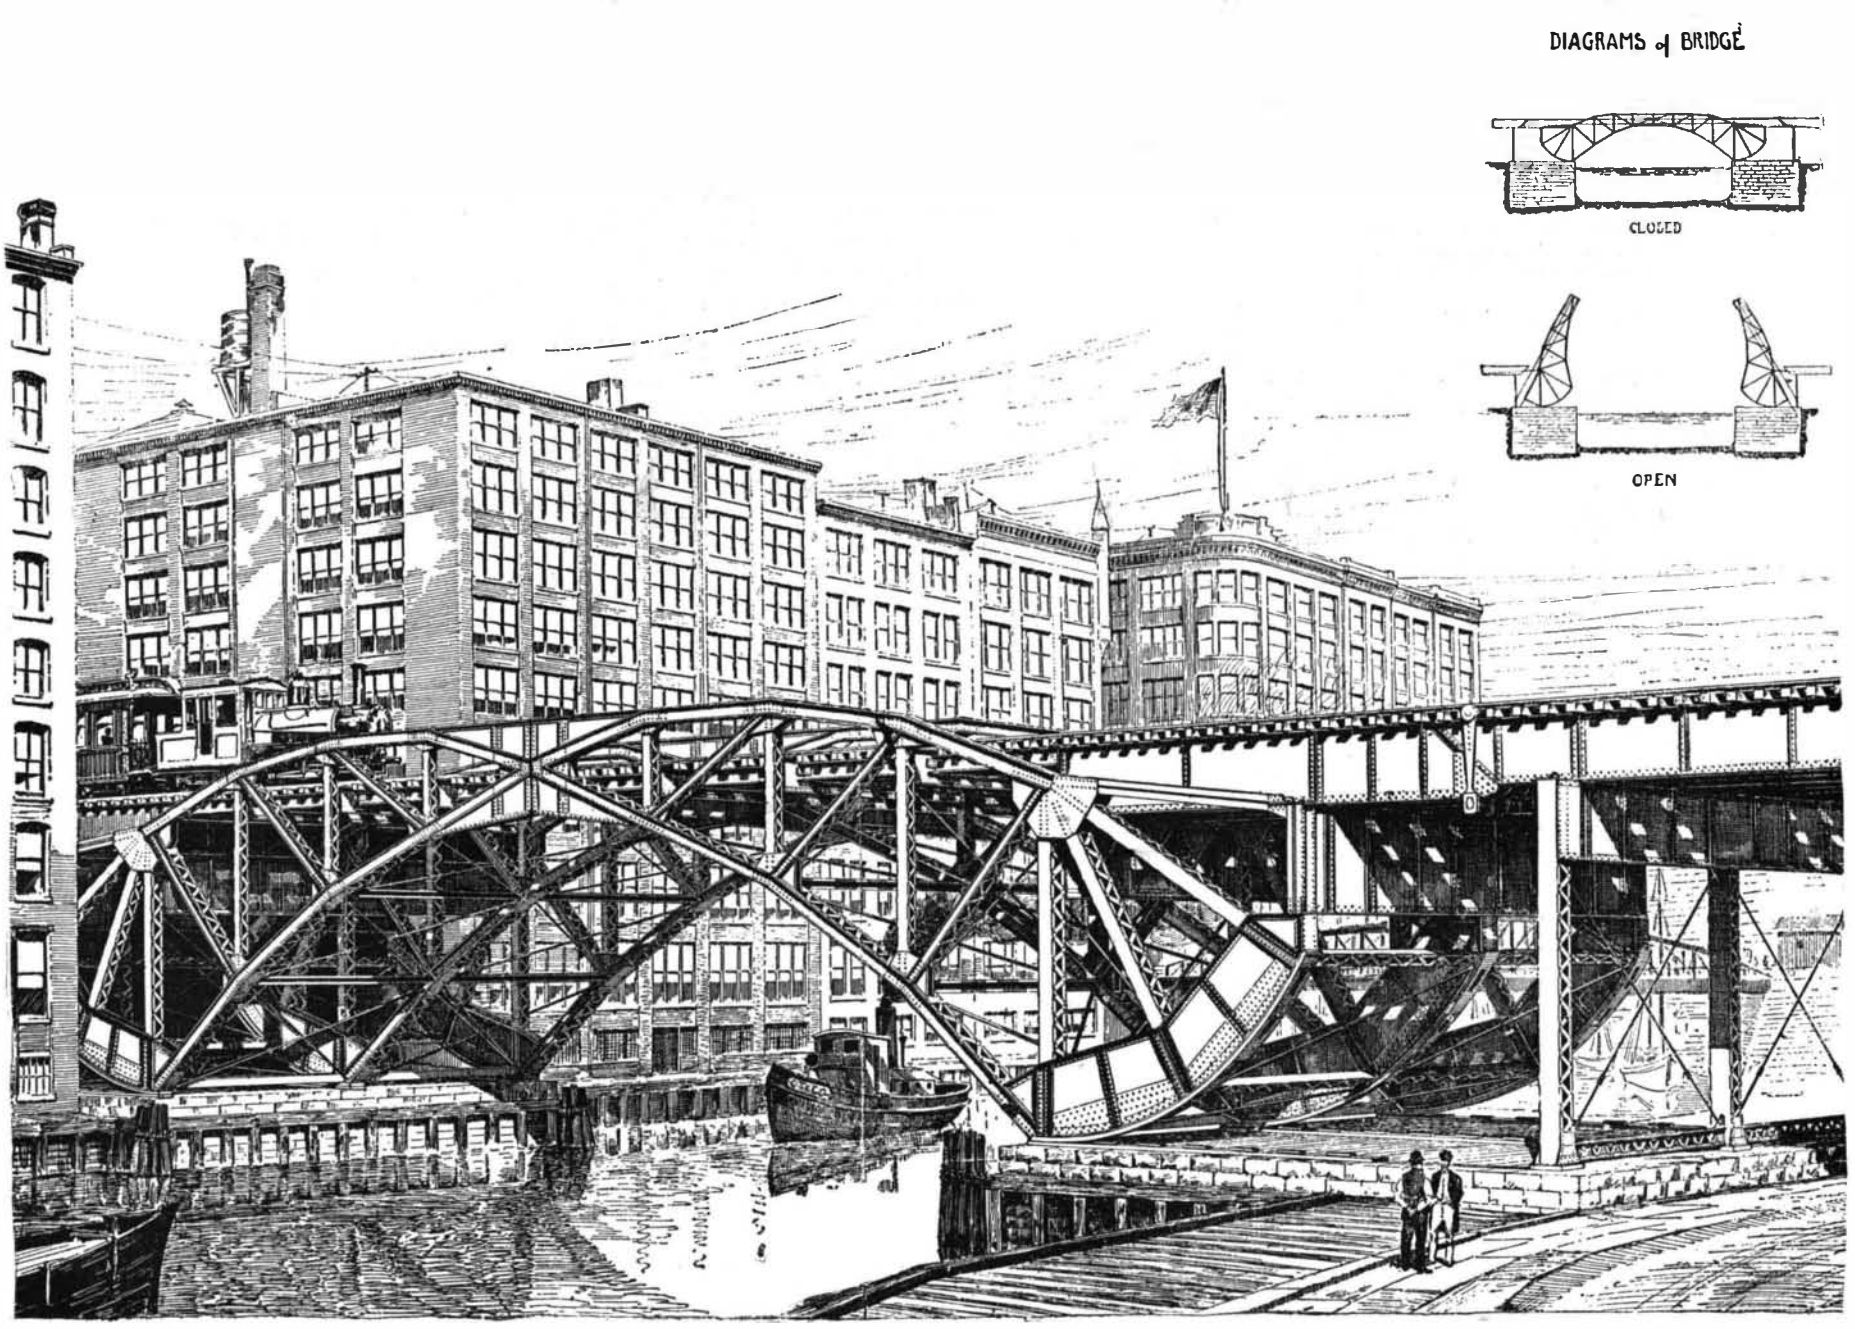

THE VAN BUREN STREET BRIDGE CHICAGO—GENERAL VIEW.

© 1895 SCIENTIFIC AMERICAN, INC.

Collodio-Chloride for Transparencies.

Pyroxyline (Hopkins & Williams ordinary)	32 gr.
Ether (725)	3¼ oz.
Alcohol (805)	2½ "
Chloride of zinc	40 gr.
Nitrate of silver	92 "

Dissolve the chloride of zinc in the alcohol (and this is a valuable quality of chloride of zinc, that it will dissolve in the alcohol without the addition of water), put in the pyroxyline when soaked, add the ether, and shake. Now put the silver into a test tube, add 40 minims of distilled water. At this stage I prefer to use a non-actinic light. A single thickness of amber glass will do. There is no necessity for working in a dull light. We now dissolve the silver by heat over a spirit lamp flame, and at the same time heat 6 drachms of alcohol in a small flask; when the silver is dissolved, add about a drachm of hot alcohol to it by degrees. Then add to your collodion, a drop or two at a time, and shake well between, rinse out the tube with the remaining alcohol. If the operations have been carried out properly, a few drops of the emulsion put upon a plate will show an orange tinge; a fairly thick film, a full orange, inclined to ruby when held up to a light. The emulsion must be kept for not less than twenty-four hours.

This emulsion may be washed in the ordinary way. I use it without washing as a rule, as washing entails the consumption of twice the quantity of solvents. To filter, place a plug of wool or good sponge in a glass funnel, and run the emulsion through. Moisten sponge or wool wit ha few drops of alcohol first.

Coat the plates, and place them in a dish of water until the water runs smoothly over the surface, then rinse with two changes of water. Wipe the backs, and drain on blotting paper; or, when plates are wanted quickly, a piece of blotting paper may be placed on face of the plates, and gently pass a finger over to absorb all surface water. After this, they dry in five to ten minutes by the use of such a piece of apparatus as I show you. The usual drying cupboard will do, of course.

With this emulsion no preservative is at all necessary. I have found no difference in the results. One thing I have forgotten to mention in the proper place, that is, the use of a substratum to prevent the film slipping off the plate during washing. I strongly recommend edging the plates with India rubber solution. This is quickly done with a small camel hair brush cut to about a quarter of an inch long in the hair. A dozen of lantern plates can be done in five minutes easily.

The results which I show you have been developed with Abney's—

Ferrous citro-oxalate	1 part.
Ten per cent bromide potassium solution	1 "

Glycin I have only tried one formula given by the makers, that for hard development; and hydroquinone, as follows:

Hydroquinone	4 gr.
Bromide potassium	24 "
Sulphite of soda	48 "
Water	1 oz.

Three minims of a ten per cent solution of carbonate of soda.

Development was from five to twelve minutes. All these developers may be used repeatedly. Hypo must be used for fixing; 2 ounces to the pint is strong enough. Washing in the hand for about a minute is enough to remove the fixing salt.

The light used by me was magnesium, 6 to 36 inches. The colors are black, claret, and most beautiful purples to purple black.—J. S. Teape.

Fog Signals.

The subject of fog signals was discussed recently before the M. P. Club at its meeting in the Institute of Technology, Boston, the speaker being Maj. W. R. Livermore, of the United States army, who has charge of the lighthouses and signals in this district.

The Boston Commonwealth says the paper was a most interesting one, embodying, as it did, the experiments undertaken by Maj. Livermore along our New England coast, experiments which shed much light on several vexed questions.

The lights of the lighthouses in clear weather, said the speaker, are obscured only by the curvature of the earth, but in fogs, since even the sun is hidden, they become invisible. Sound, however, travels well under some conditions of storm, and a century or two ago the use of bells was begun as a warning in times when the light could not be seen. At Boston Light a cannon was once used as a signal, and many other devices have been invented to warn mariners as they approach the shore.

The United States is the only nation in the world which makes an attempt to line its entire shores with signals, the theory here being to place such signals sufficiently close to permit of shore navigation in any weather; but practically the system is not quite complete. In 1851 the transmission of signals through the air was investigated by Gen. Duane; afterward it was taken up by Henry and continued by him with more or less activity up to the time of his death. During the past year a systematic series of experiments was undertaken by the Lighthouse Department, and Maj. Livermore, who had this investigation in charge, had been able to secure quite a number of observations which throw light on matters which have been puzzles to all previous experimenters.

The signals which are in common use are the siren, devised in 1870 by Brown, which can be heard ten or twelve miles; whistles, which will carry eight or ten miles; trumpets, with a range of six miles; and bells, which can be heard not more than three-quarters of a mile. In addition, there are floating bells, which can be heard for slight distances only, and whistling buoys, which are nearly as powerful as the trumpet.

The experiments of the last season had to consider the efficiency of the signals and their expense. The sirens can be heard for long distances, but they are very expensive. On the other hand, bells are not costly to operate, but they are audible for short distances only. A portion of the experiments dealt with larger bells and with the giving of the present bells a harder stroke with the hammer, both of which give the bell signals a higher efficiency.

With reference to the transmission of the signals through the air, previous experiments or comparisons have been uneven. For example, no trumpet has ever been constructed large enough to be properly compared with the siren. Maj. Livermore's experiments concerned themselves with the efficiency of the signals, the details of their construction and position, the reflections and the refractions of the "sound rays," and the effect of obstacles near to and distant from the source of the sound.

For this purpose one of the lighthouse steamers was fitted for the work, and observations in all kinds of weather and under differing conditions were secured. With reference to obstacles, it was found that intervening obstacles tend to diminish the intensity of the sound, irregular surfaces near and in front of the signals effectively lessen their efficiency, obstacles behind the signal cut off the sound in that direction, and obstacles at a distance from the signal cut off the sound in their immediate shadows.

As to the effect of weather conditions, these facts appear: Rain and snow do not of themselves modify the transmission of sound, but in affecting the temperature of the atmosphere they do influence the refraction of the sound and may, indeed, under certain conditions, cause it to be lost to objects on the surface of the water. This is a most important discovery, for it accounts beautifully for the so-called "ghosts," which are areas within which no sound from the signals can be heard. These silent areas have been accounted for in different ways, Tyndall having given a "flocculent material" solution, which, while within the limits of laboratory experiment, seems hardly possible on so large a scale as it must be in nature. Maj. Livermore finds that under certain conditions of wind relative to the position of the signal, the sound rays become refracted upward in certain places, reaching the surface of the water at more distant points in precisely the same line.

A curious example of this was once observed in experimenting near Boston Light. At a distance of about a mile from the light, no sound whatever was heard from the signals at the light, and it was thought that they had been stopped. Suddenly, however, they were heard in full intensity, and the steamer was stopped and backed again into the silent area. A man was sent up the mast, and he reported that he could hear the signals, although no sound could be heard on deck.

This experiment was repeated several times, and a position was found where the noises could be heard at the bow of the steamer but not at the stern. The signals employed on this occasion included a bell, a fog horn, a whistle and a gun; and although the smoke of the gun and the steam of the whistle could be seen from the steamer, no sound reached its deck while in the silent area. The sound rays, refracted through the conditions of the atmosphere, formed an arch over the silent area.

As the outcome of these experiments and investigations, there are many matters of interest and importance. Scientifically, the explanation of the atmospheric conditions which cause the silent area and the underlying principles of refraction of "sound rays" are of great importance; while, practically, there are many matters closely related thereto. The location for signals so that their efficiency may be to seaward, and not, as now, oftentimes to landward, where, as the speaker said, "the inhabitants of the cottages do not seem to appreciate their value," the placing of them so that the silent area may be overcome, and other matters of this nature, are of the greatest practical advantage.

The lecture was throughout of the greatest interest, being fully illustrated with graphic drawings, photographs of the fog signals and of the prominent lighthouses along our northern coast. The most striking of the graphic drawings was a series representing the intensity of the signals throughout the course of the experimental trips, the relation of the silent area to the direction of the wind in its upper and lower currents being indicated.

The Boiling Point of Milk.

Dr. Edmunds, writing in the British Medical Journal, makes the following observations on this subject: Referring to the temperature at which typhoid bacilli are killed, a correspondent assumes that milk boils at 180° to 190° F. This is a mistake which needs correction. Milk boils at a temperature higher than that of water, and it is well known that boiling milk inflicts a much more serious scald then boiling water. The point at which milk boils will vary half a degree or more, according to the amount of its saline and other non-aqueous constituents, but I find that a fair sample of milk, taken from my own kitchen, boils at 213·5° F. when tested with a standard chemical thermometer. I have always advised that milk boiled for one minute is made safe by the killing of any infective germs which it might have contained. The butter contained in the milk does not seem to raise its boiling point, but it is well known that butter and other fats and fixed oils boil at a very much higher temperature, and that boiling fixed oils destroys the skin as effectually as melted lead. In the manufacture of tin plate—that is, sheet iron plated with tin—the tin is kept melted under melted tallow, and the clean sheet iron is tinned by being passed through this bath of molten tin. Fixed oils may be heated to about 500° F. without undergoing material change, but at about 600° F. they begin to boil, owing to the evolution of gases, which are set free as a process of destructive distillation. It is generally held that the typhoid infection of milk is due to contaminated water used for washing the milk vessels or for augmenting the bulk of the milk by fraudulent additions. My own opinion is that an escape of fecal matter from the cow while being milked often falls into the milk pail, and that this is generally the real cause of typhoid infection in milk. I have actually seen this to occur when inspecting dairies and examining suspected cows, and I am perfectly sure that it often takes place. The polluted water theory seems to me to be far-fetched and inadequate.

An Exposition of California Products to be Held in Berlin.

An interesting exhibition of California food products is about to be opened in Berlin. The exhibition has been prepared by private enterprise in the effort to educate the people of Germany and of other foreign countries in the use of American products and to open, if possible, a new field for their consumption. A large building situated in the Thiergarten is being fitted up for the purpose, and the exhibition, it is announced, will be open to the public from the 5th of May to the 5th of July. The building is to be divided into octagonal courts, in each of which there will be a separate exhibition.

In one court, for example, will be shown bitter beers and cordials, another will be devoted to the orange products, and in other courts will be found dried fruits, vegetables, fish, canned fruits, oysters, etc. A novel feature will be a cafe for women, in which all kinds of breakfast foods will be served by colored attendants. The redwood industries of California have combined to build a redwood cottage, in which a unique exhibition will be made. The cottage will contain, besides other products, redwood shingles and burl, and experiments will be made to demonstrate the adaptability of redwood for the manufacture of lead pencils. Scattered about the building there will be some twenty booths attended by young women in Quaker costume, who will distribute prepared dried fruits, mushes, and baking powder products. There will also be glass-inclosed corn poppers, with the idea of introducing this delicacy into Berlin. A model American business office is also to be on exhibition, and it is believed that the many labor-saving devices and conveniences common in this country may be introduced in Germany.

The exhibition, it may be seen, is to be carried out on a very ambitious scale. Some three hundred business firms in California are enlisted in the enterprise, and these represent a capital of nearly $400,000,000. The exposition is not competitive, but purely of a commercial character, and, it is confidently believed, will prove a very effective advertisement for the Pacific coast.

Moving a Masonry House.

The Sage house, Brooklyn and St. Mark's Avenues, Brooklyn, N. Y., has been successfully moved by B. C. Miller & Son, the house movers of that city. The building is of stone, weighing about 1,300 tons, and was built by a son of Mr. Russell Sage, of New York. The contract for removal called for its being moved 30 feet toward St. Mark's Avenue and 20½ feet toward Brooklyn Avenue, and that it should be raised 2½ feet on its foundations. This to be done without break or crack in the walls.

© 1895 SCIENTIFIC AMERICAN, INC.

THE WHITE-TAILED GNU IN THE HANOVER ZOOLOGICAL GARDEN.

The accompanying engraving, for which we are indebted to the Illustrirte Zeitung, shows the white-tailed gnu, with its calf, now in the Zoological Garden at Hanover. This garden possesses specimens of both the white-tailed gnu (Catoblepus gnu) and the black-tailed gnu, also called the blue or Gorgon gnu (Catoblepus Gorgon), but those of the former species are specially interesting. At first the young one resembled a bison calf in many respects. Its coat was a pretty brown color, its head being a sepia brown, while the brush-like bunch of hair just above the nose was black, and the short stiff main was also black. Its bushy tail, which reached almost to the hock, was round like that of a dog. The thick hair concealed the rudimentary, button-like horns, but at the end of five weeks these were half a finger long. Although, in that time, the brush-like hair on the head and the mane—very characteristic features of the gun—had become more marked, the creature still looked as if belonging to a different species from the mother. When eight weeks old its back was only about a hand's breadth lower than the mother's and its horns were about three inches long and quite straight, differing in this respect from those of the old gnu. The color of its coat was also beginning to change.

The gnu belongs to the antelope family, the members of which differ so greatly in size, proportions, color, the shape of the horns, etc.

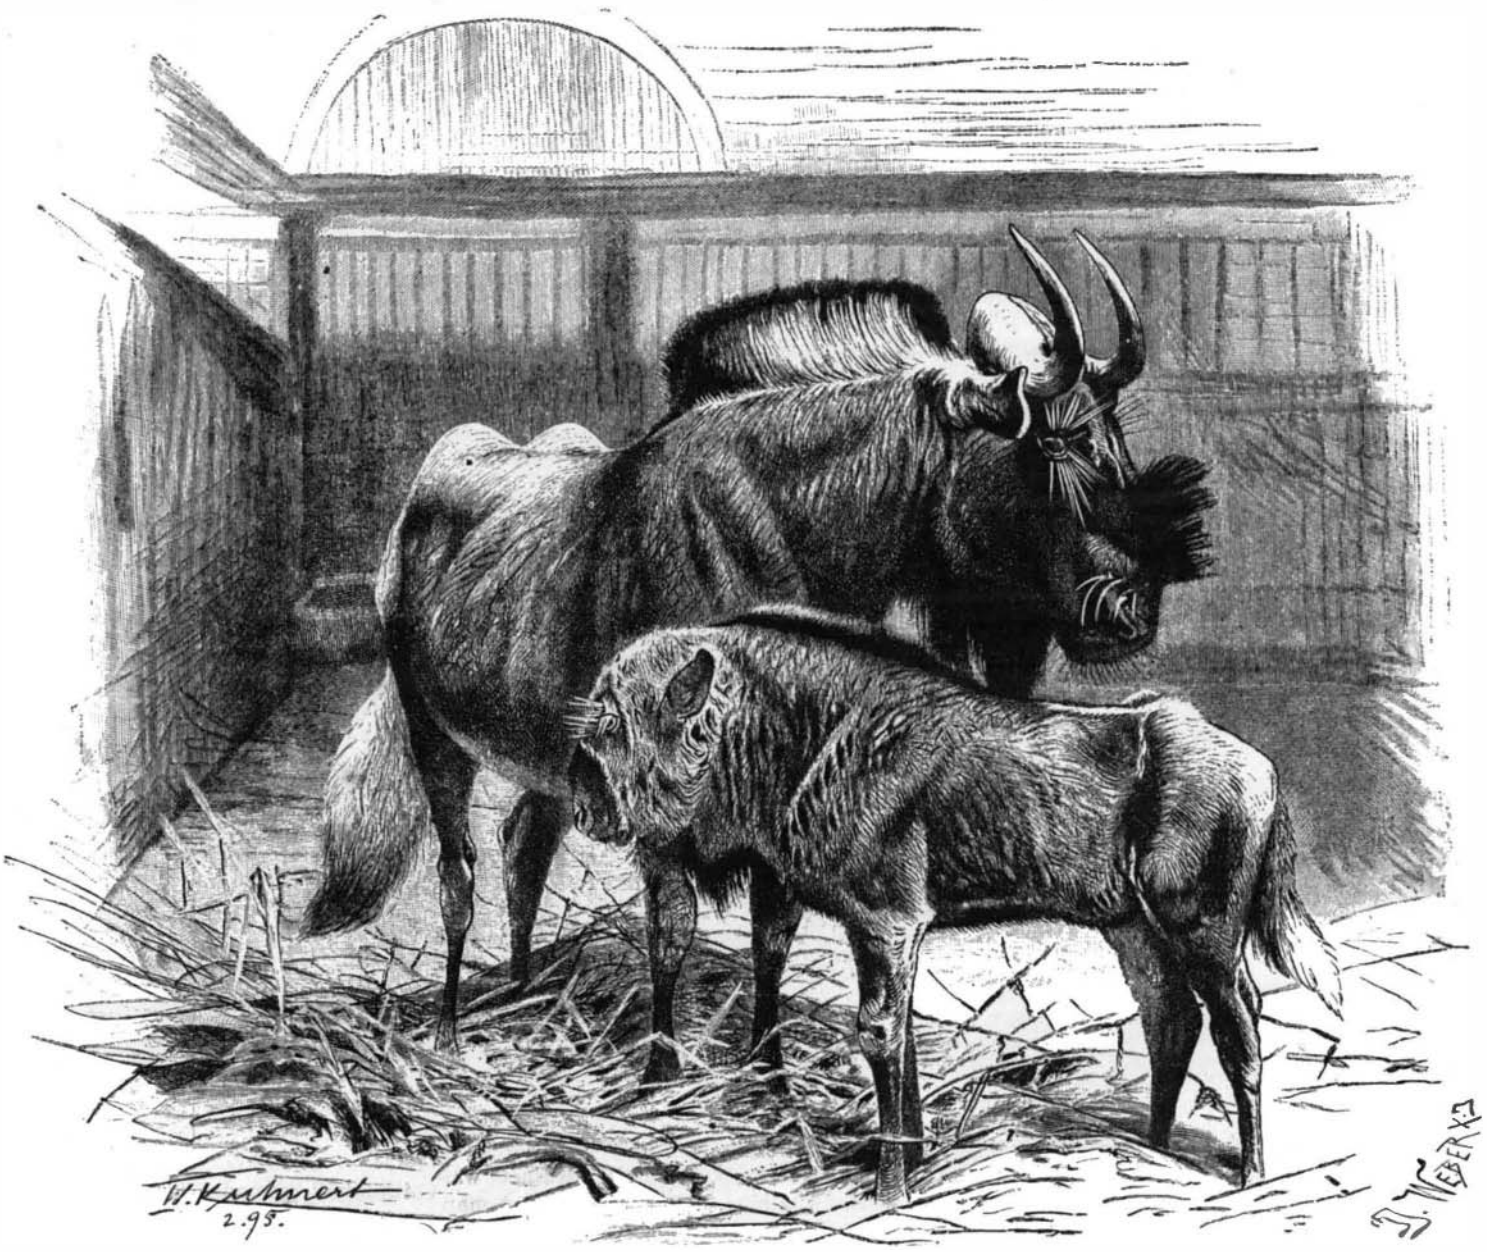

WHITE-TAILED GNU AND CALF IN THE ZOOLOGICAL GARDEN AT HANOVER.

DRAWN FROM LIFE BY WILHELM KUHNERT.

The Alaskan Gold Regions.

Last season's yield of gold from the Yukon River district in Alaska was about $249,000, according to an estimate gathered from miners and business men in the district by the Alaska News. The returns are undoubtedly big, but the labor of getting the gold, as described by one of the oldest miners in the region, is very great. The Yukon district is remarkably difficult of access, and a great many adventurers who have started hopefully from Juneau have failed even to get near the gold region. It is an expensive journey, too. Then the character of the gold mining and the limitations under which it must be done have sent many fairly experienced miners back in despair.

In many districts the gold-bearing rock is twenty or more feet below the surface, and shafts must be sunk to that depth through ground frozen solid and by a most laborious process. The prospect holes are usually about three and a half feet wide by six feet long. Enough wood must be cut to cover this space, and a rousing fire be kept up for almost a whole day before the ground is sufficiently thawed for the miner to get out about a foot or a foot and a half of gravel and soil. One man can burn a hole down about a foot a day. The work can be done only when all the surface water is frozen, otherwise it would drain into the prospect hole. In this region wells have been sunk seventy-five feet or more, all through frozen ground, and the miners say they never got below the frost line.

In other districts the work can be done only in the very brief summer, from the middle of May until about the middle of September, and usually for only about ninety days. In these regions the ground is not frozen so deep, and the gravel and soil can be washed from the bed rock. Flumes must be built from the creeks and the water conducted to the claims. The bed rock is from ten to twenty-three feet below the surface, and all the overlying soil must be washed away before the gold is accessible. A working supply of water is rarely obtainable for more than ninety days of the year. Usually almost two entire seasons are consumed in this preliminary work before a sight of the gold is obtained, and the miner must have money as well as pluck to keep him going until he strikes pay gravel. The gravel needs to be remarkably rich to compensate for the arduous and tedious labor of reaching it.

When the claims are worked by burning prospect holes in the winter, hot water is needed for washing the gravel when it is obtained. Usually when the gold-bearing gravel has been reached the returns have been handsome. Along Miller Creek in the past season or two the yield has averaged as much as $1 or $1.50 a pan, and claims staked out two or three years ago are now held at prices varying from $2,000 to $20,000 each.

The extent of the gold belt of northwest Alaska and the Canadian Northwest Territory is still a matter of speculation. From the information brought by prospectors it is believed that the belt covers a district from seventy-five to a hundred miles wide, commencing on the head waters of the Hootalinqua River, in British Columbia, and following closely the course of the Yukon River to and beyond the Arctic Circle, a distance of about nine hundred miles. It is probable that dozens of tributary streams, as yet unmapped, many doubtless unknown, are rich in gold and silver. The vast region is practically unexplored. The mining at present going on is but nibbling on the edge of the rich region. But when the gold and silver mines are systematically opened up, it will be a region for the capitalist and not for the individual miner. The ground must be exceptionally rich in gold to pay one or two miners working for themselves. With capital large districts could be worked in a systematic way and big profits be realized. From all accounts, that is how the Yukon gold and silver region will be made to give up its riches.

Test of an Eighteen-inch Armor Plate.

An important test of an 18-inch Harveyized armor plate took place at the Indian Head proving ground on May 1. The test was particularly interesting, as it was practically a competition of the suspected Carnegie product and the successful Bethlehem manufacture. The test of the 18-inch Bethlehem plate on March 11 was described in the SCIENTIFIC AMERICAN for March 23, 1895. The Carnegie plate was tested with exactly the same grade of shells. The Carnegie plate weighed 79,300 pounds, was 16 feet 9½ inches long, 5$\frac{3}{16}$ inches wide and cost $20,000. It was the representative of ten plates, weighing 306 tons, for the battleship Oregon. The plate was attached to an oak backing three feet thick, by 26 three-inch bolts. The plate was erected on a hillside about 300 feet from the gun battery.

The first projectile was an 850 pound 12-inch Holtzer shell, propelled by 249 pounds of brown, hexagonal powder. The velocity was 1,465 feet per second, and the shell struck the plate with an energy of 12,662 foot tons. This was a cracking shot, but the plate was not cracked or penetrated, the projectile being completely shattered after entering about 6 inches. Portions of the outer shell of the plate scaled off. The next shot was propelled by 443 pounds of powder, the muzzle velocity being 1,926 feet and the striking energy 21,885 foot tons. This shot was to test for penetration, but it only passed through 10 inches of the plate, the head of the projectile being smashed on the plate. The metal of the plate where the projectile struck was fused. Notwithstanding a crack about three-quarters of an inch wide which extended from top to bottom of the plate, it was accepted by the government. It was then determined to attack it with the great 13-inch gun. A 13-inch Carpenter shell, weighing 1,100 pounds, was driven by 489 pounds of powder. The projectile had a striking energy of 25,000 foot tons. It was of course expected that the shot would demolish the plate, but instead, after penetrating 10 inches, the projectile itself was completely destroyed. The solid oak backing was, however, greatly split. A crack 3 inches wide extended some distance from the top. The ability of the plate to keep out the heaviest projectiles we now manufacture is amply demonstrated. At present the race between armor and gun seems to be in favor of the armor.

© 1895 SCIENTIFIC AMERICAN, INC.

RECENTLY PATENTED INVENTIONS.

Engineering.

FEED WATER HEATER AND PURIFIER.—Daniel M. Robinson, Bay City, Mich. This is an apparatus to be incased in the flue or masonry of an ordinary boiler to utilize the waste heat for heating the feed water. It has provision for holding the water in it under boiler pressure and at the same level as the water in the boiler, is adapted to precipitate any matter in the water in the form of sediments, loose carbonates, etc., and the construction is such that it may be conveniently put together and taken apart. The improvement includes a suitably connected outer shell in which is a settling cylinder made up of a series of superimposed sections, a pipe leading from the cylinder to the upper part of the shell and discharging into a series of pans arranged one above the other.

Railway Appliances.

CAR AXLE BOX LUBRICATOR.—James S. Patten, Baltimore, Md. This is an improvement in formerly patented inventions of the same inventor which have been subjected to practical use on cars in ordinary service, rendering the lubricator more serviceable, reducing its cost and weight, and increasing its durability. It is adapted to be inserted into and contained in the usual form of axle box, on the mere removal of the ordinary packing, and the lubricant holder is preferably of galvanized sheet iron, formed from a blank, and in it are suitably supported rollers adapted to slide laterally on the axles, and breaking up and lifting the lubricant.

CAR DOOR.—William E. Hoyt, Ravenswood, West Va. This inventor has devised improved means for supporting and manipulating the flush side doors of ordinary freight cars. The car has a vertically undercut seat in a plate fixed to the front wall of the doorway, the seat being engaged by one of the arms of a vertically swinging operating lever, permitting the trainman to press down with his weight in opening the door, and to lift directly under the door in closing it. The lever lies practically in the plane of the door when the latter is closed, where it cannot be well tampered with, there being also on the lever a hasp attachment.

Electrical.

DOOR OPENER.—John Schneider, Long Island City, N. Y. This is an improvement on a former patented invention of the same inventor for a simple and durable electric door opener, not liable to get out of order, and arranged for unlocking a door from a distance. The armature lever is normally held away from the magnet by a spring, the magnet being in a circuit having a button to be pressed when the door is to be unlocked, the drawing of the armature lever causing a catch to engage a bolt in a lock on the door. To insure the opening of the door when unlocked, a spring hinge of any improved construction is employed.

ELECTRIC LAMP HANGER.—David Aitchison, Easton, Pa. This improvement is more especially designed for use with incandescent lamps, permitting of conveniently raising or lowering the lamp or moving it sidewise as desired. A spring-actuated drum fitted to slide on a pivoted horizontal arm carries a cord to support the lamp, a guide moving with the drum guiding the lamp-supporting cord. A shaft journaled in the free end of the pivoted arm carries a crank and a segmental arm adapted to engage the drum.

Mechanical.

SAW.—Henry J. Frederick, Brainerd, Minn. This is an improvement in buck saws, fret saws, and other saws having frames, by which the operator may quickly give at any time the desired tension to the sawblade, or the blade may be entirely removed from the frame without disconnecting the members of the latter. The spacer bar is rigidly secured to the rear or handle member and movably connected with the upper end of the front bar, a brace pivoted to the middle of the front bar extending to the spacer bar, while a longitudinal screw rod on the top of the latter extends through the upper end of the front bar, where it has a nut, the other end of the rod having an eccentric strap, an eccentric being pivoted to the bar. On the top of the eccentric is a handle, by the simple movement of which the tension of the blade may be increased or diminished.

SIDING CUTTER AND GAGE.—Thomas W. Purdy, Link, Ohio. Among devices employed in laying siding boards on buildings, this invention presents a strong and easily operated device, to be conveniently clamped to the window casing or corner board for squarely cutting off the end of a siding board, and also serve as a gage for the overlap. It comprises a U-shaped supporting frame, with fastening devices, a die one side of the opening and a knife to travel across the opening opposite the die, in connection with a lever to work the die, a gage being adjustable on the extension end of the frame. The clamps are spring-actuated and the knife is quickly worked.

Agricultural.

COTTON PLANTER.—Morse P. Scott, Woodville, Miss. According to this improvement the seed box and furrow opener may, by means of a simple hand lever, be conveniently elevated or depressed to provide for shallow or deep planting. They may also be carried together to the right or left sufficiently to avoid an obstruction, through the medium of a foot plate. The machine is of simple and economic construction.

COTTON CHOPPER.—This is an additional improvement of the same inventor, providing means whereby superfluous plants may be chopped from the rows and the rows simultaneously cultivated. The driver may also easily and quickly move the choppers either to the right or left, thus accommodating the machine to the unevenness of the rows, and both the cultivators and choppers may be raised to entirely clear the ground.

Miscellaneous.

VAULT CASH INDICATOR.—Samuel R. Hamilton, Farmersville, Texas. This is a device for indicating the amount of money, commercial articles, etc., in a safe or vault. It has a casing which may be conveniently placed upon a desk, safe, etc., is L-shaped in form, and comprises a series of casings, in the vertical portions of which are arranged slide blocks bearing on their faces numerals, one above the other, which are made to appear in openings in the front of the casing as the block is moved up or down. The block is on a screw rod connected with a beveled gear at the base, whereby each block may be moved up or down, to bring the figure desired in front of the aperture, by means of a key inserted in the face of the horizontal portion of the casing, the figures thus displayed in the row of apertures indicating the amount. In the front of the casing is a horizontal guideway for a slide bearing the title of the article the device is employed in indicating.

HOSE COUPLING.—Joseph S. Blackburn, Salem, Ohio. This is an improvement on a formerly patented invention of the same inventor, to adapt the coupling to hose of large sizes and dispense with some features, reducing the cost. The male section has a waterproof sleeve, adapted to be forced outward against the interior surface of the female section by water pressure against the inside surface, thus making a water-tight joint without depending upon abutting the sleeve against a shoulder in the coupling, and insuring a sure and tight waterway when the sections are brought together.

NOTE.—Copies of any of the above patents will be furnished by Munn & Co., for 25 cents each. Please send name of the patentee, title of invention, and date of this paper.

NEW BOOKS AND PUBLICATIONS.

CELLULOSE. An outline of the chemistry of the structural elements of plants with reference to their natural history and industrial uses. By Cross and Bevan. London and New York: Longmans, Green & Company. 1895. Pp. vi., 320. Price $4.

In the present day of wood pulp factories and vulcanized fiber goods, a work on cellulose, the basis of all manufactures of this type, seems peculiarly timely. The book under review is a treatise on the chemistry and microscopy of the subject. It possesses two indexes, one of authors and one of subjects, the first one showing how thoroughly the bibliography of the subject has been consulted in its preparation. To the educated manufacturer and technologist, the book will be a sine qua non.

THE VENTILATION OF MINES. By J. T. Beard. First edition. New York: John Wiley & Sons. 1894. Pp. xiii, 170. Price $2.50. No index.

It is refreshing to find so clear and good a treatise written by an American author, and forming a work adapted for those operating American mines. Heretofore, by some fatality, many of the mining engineering books of the day have been published in England, and have been written from the insular standpoint that an Englishman excels in accentuating. The book is dedicated to the miners of Iowa, among whom the author states that he has passed thirteen years. While we note the fact that the book is without an index, we must also state that the very full table of contents makes an index almost unnecessary.

ON INDIA'S FRONTIER; OR, NEPAL, THE GURKHAS' MYSTERIOUS LAND. By Henry Ballantine. New York: J. Selwin Tait & Sons. Pp. 192. Price $2.50.

This attractive work, with its numerous illustrations, describes travels in India in a very graphic way. Readers of Rudyard Kipling will remember his admiration for the Gurkha soldiers. In this we hear something of their land, with numerous illustrations of buildings and people of the country, and have, besides, a most interesting and readable book. The author's criticisms on the method of governing are very cleverly put.

TRANSACTIONS OF THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS. Volume XV. 1894. New York City: Published by the Society. Pp. 1359.

The size of this volume, its absolutely model index and the general make-up of the volume, are three things that alone are highly creditable to the society publishing it. The matter contained in the papers is of great value to the profession, and the volume itself must be read to obtain an idea of the wealth of material to be found between its covers. The existence of a professional society admits of no better vindication than that afforded by its publications. Their merit settles the permanent status of the Mechanical Engineers' Association.

DER BRUCKENBAU IN DEN VEREINIGTEN STAATEN AMERIKAS. Von Professor W. Ritter. Zurich: Albert Raustein. 1895. Pp. 66. 12 plates and 60 figures. Price $1.50.

The report of the Swiss delegate to the Columbian Exhibition of 1893 is based on a three months' journey in the United States, as the most valuable information regarding our bridges could not be found at the Exhibition itself, but had to be collected at the bridges. The author principally points out what is new relative to the bridges built in Europe. The plates are well executed and give dimensions of the parts.

RATIONAL BUILDING. Being a translation of the article "Construction," in the Dictionnaire Raisonné de l'Architecture Francaise of M. Eugene-Emmanuel Viollet-le-Duc. By George Martin Huss, architect. New York and London: Macmillan & Company. 1895. Pp. xii, 367. Price $3.

M. Viollet-le-Duc's works have attained a wide popularity. We find in this treatise on architecture a most elegant example of book making, containing very numerous illustrations introduced in the text. The eminently philosophical treatment of the subject is perceptible throughout, it is evident even from the type of illustrations used, which, by the use of perspective or isometric projection, are made to give a better representation than usual of the exact appearance and construction of the more complicated forms, such as groined arches, clustered arches and general construction. As an example of such illustrations Fig. 120, page 282, may be alluded to. No one can go through our cities without feeling regret at the perpetuation of certain architectural enormities in the more permanent type of building. This much may be wished, that the profession at large would give more attention to the appearance of beauty and architecture as determined and regulated by structural laws.

THE SNOW-CHURCH COMPANY'S LEGAL AND BANKING YEAR BOOK FOR BANKERS, LAWYERS, AND THE BUSINESS PUBLIC. 1895. Collection laws revised to January 1, 1895. New York: The Snow-Church Surety Company. Pp. 1261.

This extensive work, covering, in a general way, the laws affecting banking and collecting business, is a thorough production, and one which can be warmly recommended to the profession. When it is realized that it contains far over 1,000 pages of fine type touching on the laws of all North America, it will be seen that it is not possible to give it an adequate review. For information in regard to the commercial laws and collections, it would seem to be almost indispensable to the active practitioner.

CORTINA METHOD. Intended for use in schools, etc., and for self-study. French in twenty lessons, with a system of articulation, based on English equivalents, for acquiring a correct pronunciation. By R. D. De la Cortina, M.A. Revised by Professor J. Leroux, Professor of Modern Languages at the United States Naval Academy. Book First. New York: R. D. Cortina. 1895. Pp. x, 108. Price 50 cents.

SCIENTIFIC AMERICAN

BUILDING EDITION.

MAY, 1895.—(No. 115.)

TABLE OF CONTENTS.

1. Plate in colors, showing a residence at Glen Ridge, N. J., recently erected for W. T. Taliaferro, Esq. Perspective elevation and floor plans. A fine example in the Colonial style. Mr. Chas. E. Miller, architect, New York.
2. Perspective elevation and floor plans of a cottage at Tenafly, N. J., erected for Chas. Vogt, Esq., at a cost of $5,800 complete. Mr. W. L. Stoddart, architect, New York. An attractive design.
3. A dwelling at Kennebunkport, Me. Three perspective elevations and floor plans. A most picturesque residence, with many artistic features. Mr. Henry P. Clark, architect, Boston, Mass.
4. A log cabin chapel recently erected at Black Rock, Conn. Perspective elevation and ground plan. Mr. Bruce Price, architect, New York.
5. A cottage at Park-Hill-on-Hudson, N. Y., recently erected for Geo. L. Rose, Esq., at a cost of $12,000 complete. Two perspective elevations and floor plans. Mr. A. F. Leicht, architect, New York. A well executed design, showing many excellent features.
6. A house at Orange, N. J., recently completed for Thomas L. Smith, Esq. Messrs. Child & De Goll, architects, New York. A pleasing design in the Colonial style.
7. The Yonkers Public School, No. 8, at Bronxville, N. Y. A good example of school architecture.
8. A dwelling of modern design, recently erected for M. Strong, Esq., at Montclair, N. J. Two perspective elevations and floor plans. Cost complete, $6,000. Mr. Christopher Myers, architect, New York.
9. A house at Indiana, Pa. Perspective elevation and floor plans. Cost complete $3,100. Architect, Mr. E. M. Lockard, Indiana, Pa. An attractive design in the Colonial style.
10. A very attractive residence at Montclair, N. J., erected for Frederick S. Gage, Esq. Perspective elevation and floor plans. Mr. E. R. North, architect, Montclair, N. J.
11. View of Capistrano Station, California.
12. Design for a fireplace.
13. The brick power station of the Brooklyn City Railroad Company.
14. Miscellaneous Contents: A State park in the Catskill Mountains.—To prevent the slamming of screen doors, illustrated.—Quarrying by means of fire.—A new lawn sprinkler, illustrated.—Art in metal tile roofing, illustrated.—An improved hot water heater, illustrated.—A macadamized road through swampy land.—Tinners' hardware and roofers' supplies.—Screen doors, illustrated.—Stair finishing, illustrated.—A hoist for use over hatchways, illustrated.—Ventilating the school room.—Gas burning range, illustrated.

The Scientific American Building Edition is issued monthly. $2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming, practically, a large and splendid MAGAZINE OF ARCHITECTURE, richly adorned with elegant plates in colors and with fine engravings, illustrating the most interesting examples of Modern Architectural Construction and allied subjects.

The Fullness, Richness, Cheapness, and Convenience of this work have won for it the LARGEST CIRCULATION of any Architectural Publication in the world. Sold by all newsdealers. MUNN & CO., PUBLISHERS, 361 Broadway, New York.

Business and Personal.

The charge for insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in the following week's issue.

"U. S." metal polish. Indianapolis. Samples free.

Marine Iron Works, Chicago. New catalogue free.

For best hoisting engine. J. S. Mundy, Newark, N. J.

Presses & Dies. Ferracute Mach. Co., Bridgeton, N. J.

Woodpulp machinery. Trevor Mfg. Co., Lockport, N.Y.

Screw machines, milling machines, and drill presses. The Garvin Mach. Co., Laight and Canal Sts., New York.

Emerson, Smith & Co., Ltd., Beaver Falls, Pa., will send Sawyer's Hand Book on Circulars and Band Saws free to any address.

I make Machinery Name Plates in bronze and aluminum. Designs furnished. Twining Campbell, Liberty St., Paterson, N. J.

The best book for electricians and beginners in electricity is "Experimental Science," by Geo. M. Hopkins. By mail, $4; Munn & Co., publishers, 36 Broadway, N. Y.

For the original Bogardus Universal Eccentric Mill Foot and Power Presses, Drills, Shears, etc., address J. S. & G. F. Simpson, 28 to 36 Rodney St., Brooklyn, N. Y.

Competent persons who desire agencies for a new popular book, of ready sale, with handsome profit, may apply to Munn & Co., Scientific American office, 361 Broadway, New York.

☞ Send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., 361 Broadway, New York. Free on application.

Notes & Queries

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters, or no attention will be paid thereto. This is for our information and not for publication.
References to former articles or answers should give date of paper and page or number of question.
Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.
Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.
Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.
Scientific American Supplements referred to may be had at the office. Price 10 cents each.
Books referred to promptly supplied on receipt of price.
Minerals sent for examination should be distinctly marked or labeled.

(6506) **W. T.** says: Would you please advise me how to treat cow's horns to soften them so they can be pressed in different shapes and then become hard again? A. The bony core of the horn is first removed; the next process is to cut off with a saw the tip of the horn, that is, the whole of its solid part, which is used by the cutlers for knife handles and sundry other purposes. The remainder of the horn is left entire, or is sawn across into lengths, according to the use to which it is destined. Next it is immersed in boiling water for half an hour, by which it is softened, and while hot is held in the flame of a coal or wood fire; taking care to bring the inside as well as the outside of the horn, if from an old animal, in contact with the blaze. It is kept there till it acquires the temperature of molten lead or thereabout, and in consequence becomes very soft. In this state it is slit lengthwise by a strong pointed knife like a pruning knife, and by means of two pairs of pincers, applied one to each edge of the slit, the cylinder is opened nearly flat. The degree of compression is regulated by the use to which the horn is afterward to be put. When it is intended for leaves of lanterns, the pressure is to be sufficiently strong (in the language of the workmen) to break the grain, by which is meant separating in a slight degree the laminæ of which it is composed, so as to allow the round-pointed knife to be introduced between them, in order to effect a complete separation. For combs the plates of horn should be pressed as little as possible, so that the teeth may not split at the points. They are shaped chiefly by means of rasps and scrapers of various forms, after having been roughed out by a hatchet or saw; the teeth are cut by a double saw fixed in a back, the two plates being set to different depths, so that the first cuts the teeth only half way down, and is followed by the other, which cuts the whole length; the teeth are then finished and pointed by triangular rasps. Horn for knife handles is sawn into blanks, slit, pared, and partially shaped; then heated in water and pressed between dies. It is afterward scraped, buffed, and polished.

(6507) **J. R. J.** says: What is known as the best or surest remedy to remove freckles from the face?

A. Hydrarg. bichlor. ..... gr. xii.
Acid hydrochlor., pure ..... drm. iii.
Fruct. amygd. amar ..... oz. iss.
Glycerini, Price's ..... oz. i.
Tinct. benzoin ..... drm. ii.
Aqua flor. aurant ..... q. s.

Dissolve the corrosive sublimate in 3 ounces of the orange flower water, add the hydrochloric acid, and set aside. Blanch the bitter almonds, and bruise them in a Wedgwood mortar, adding thereto the glycerme and using the pestle vigorously; a smooth paste is thus obtained. Then add gradually about 9 ounces of the orange flower water, stirring constantly, continuing this operation until a fine, creamy emulsion is the result. Subject this to violent agitation—preferably with the aid of a mechanical egg whisk—and allow the tincture of benzoin to fall into it the while drop by drop. Then add the mercurial solution, filter, and make up the whole to the measure of 1 imperial pint with more orange flower water. This preparation is recommended by an eminent dermatologist as being invariably efficacious in the treat

© 1895 SCIENTIFIC AMERICAN, INC.

ment of ephelis, and always greatly ameliorating lentigo, even if it does not entirely decolorize the patches in the latter case. A general whitening of the skin is produced by this lotion without any irritation. It is as well, however, not to apply it to any abraded surfaces. It has been found far superior in practice to a preparation—which it somewhat resembles—sold at a high price in Paris under the name of Lait Antiphelique.

(6508) H. N. M. says: How can I ink typewriter ribbons? A. Take vaseline (petrolatum) of high boiling point, melt it on a water bath or slow fire, and incorporate by constant stirring as much lamp black or powdered drop black as it will take up without becoming granular. If the fat remains in excess, the print is liable to have a greasy outline; if the color is in excess, the print will not be clear. Remove the mixture from the fire, and while it is cooling mix equal parts of petroleum, benzine, and rectified oil of turpentine, in which dissolve the fatty ink, introduced in small portions by constant agitation. The volatile solvents should be in such quantity that the fluid ink is of the consistence of fresh oil paint. One secret of success lies in the proper application of the ink to the ribbon. Wind the ribbon on a piece of cardboard, spread on a table several layers of newspaper, then unwind the ribbon in such lengths as may be most convenient, and lay it flat on the paper. Apply the ink, after agitation, by means of a soft brush, and rub it well into the interstices of the ribbon with a tooth brush. Hardly any ink should remain visible on the surface. For colored inks use Prussian blue, red lead, etc., and especially the aniline colors.

Aniline black	½ oz.
Pure alcohol	15 "
Concentrated glycerine	15 "

Dissolve the anilme black in the alcohol, and add the glycerine. Ink as before.

(6509) W. B., Jr., says: Will you please tell how I can make a gallon of perfumed violet writing ink? A. One and one-sixth ounce of so-called primula violet is dissolved in 3 quarts boiling distilled water. This may be converted into a copying iuk by adding 4 ounces sugar, 4 ounces glycerine. N. B.—Primula violet is known also as dahlia or Hofmann's violet, of which there exist a number of different shades. Perhaps the finest is that known as No. 6. This coloring matter consists of salts of trimethylrosaniline and triethylrosaniline. Other tints may be prepared from other aniline colors. It is best to add to the solution of an aniline color a small percentage (3 to 5 per cent) of alcohol, and also of glycerine (1 to 4 per cent). To perfume it add the essential oil, which will give the desired odor.

(6510) A. B. D. asks: 1. Why does the whistle of a locomotive in motion sometimes sound higher than it really is? A. Because the engine approaching virtually shortens the sound waves. 2. Are heat and light molecular or atomic forms of motion? A. "Radiant heat" so called and light are forms of ethereal energy; heat, properly speaking, is a form of molecular energy. 3. Is ether an atomic or molecular body? A. The ether is hypothetical and cannot be termed atomic or molecular. 4. If heat and light are molecular forms of motion, is electricity to be considered so also, as it can be changed to either of the former? A. Electricity is best treated as undefinable, and seems apt to remain so for a long time.

(6511) Gravity asks: What will prevent the formation of sulphate of zinc on the outside of the jars of a gravity telegraph battery? I am informed coal oil will give the desired result. Do you think it affects the working strength of the battery? A. Coal oil is used for the purpose named and has no ill effect. Simply coating the edges of the jar with melted paraffin wax will prevent creeping to a considerable extent.

(6512) W. G. R. asks whether there is a dynamo yet made that has no revolving wire. One without a commutator of any kind and producing constant current (not alternating) of high or low voltage. A. There is no dynamo answering fully your description. There is a theoretical or experimental one, Faraday's copper disk dynamo, described in the text books.

(6513) G. S., Jr., writes: I have got some armature punchings for the sewing machine motor described in SUPPLEMENT, No. 759. Can these punchings be wound the same as the carriage washers, and do the projections on them add or take from the efficiency of the armature? Are they ever used in large machines? A. Projections such as you allude to are often used on the armatures of large dynamos. Projections facilitate winding and diminish slightly the reluctance of the magnetic circuit. They have but little influence on the efficiency of the machine, tending to increase it.

(6514) P. C. T. asks: Can you give the size of German silver wire that will equal in resistance 5 strands of No. 20 German silver? Also what size, using 2 strands, will equal 5 strands of No. 20? The nearest calculation and the probable variance. A. A single lead of No. 13 wire is about 1¼ per cent too large; a double strand of No. 16 is about 1½ per cent too large.

(6515) H. R. O. asks: When the commutator of a dynamo is turned off there is almost always one segment worn deeper than the rest. What causes it to be so? A. Possibly the winding is a little out of balance, and sparking and arcing is accentuated at that point.

(6516) W. W. M. writes: I send a sample of a deposit which we think to be sulphur. It must have been deposited on the night of the 19th of March, as it was not noticed until the 20th, when it was seen to be accumulating at the edges of ponds and all other bodies of water throughout this section. It drifted in some places till it reached a depth of ¼ inch, where the water left it high and dry, and I gathered the inclosed sample to-day by picking it up with my fingers. Some of the old inhabitants say that this deposit occurs here every spring just after a big rainfall. But this time there was no rainfall. It seemed to come with a hard west wind. We have a sulphur mine west of here some 75 miles in Calcasieu Parish; it probably is the source of this deposit. We want to know exactly what it is, and how it came to be here. To-day, while gathering the sample, I noticed thousands of small bugs which seemed to be feeding on the material. A. The yellow powder which you send consists of the spores of a species of pine. The pine trees flower in spring, and this accounts for the presence of the spores as a sulphur-like deposit in your neighborhood every year at that season. Hardly a year passes in which supposed "rains of sulphur," such as this, are not reported from some part of the country.

(6517) A. A. S. asks how to figure the horse power of gas and gasoline engines. A. The proper way to obtain the mean engine pressure is with an indicator and card register in the same manner as with the steam engine. The variation of initial pressure of explosion varies very much, say from 100 to 150 pounds per square inch, and the mean pressure from 50 to 75 pounds, averaging a mean pressure of about 60 pounds. Square the diameter of the cylinder and multiply it by 0·7854 for the area. Then, if the explosive effect is every other revolution, one-half the number of revolutions per minute multiplied by the length of the stroke in feet or decimals of a foot will be the active travel of the piston under pressure. Then

$$\frac{\text{pressure} \times \text{area} \times \text{stroke} \times \frac{1}{2}\ \text{revolution}}{33{,}000} = \text{h. p.}$$

If the explosion is at every revolution, the full number must be put in the formula. If there is cushioning or compression of the air and gas in the cylinder, it must be deducted from the mean pressure. See "Gas and Petroleum Engines," by Donkin, $6.50 by mail. For the method by Prony brake see SCIENTIFIC AMERICAN SUPPLEMENT, No. 992; 10 cents mailed.

(6518) R. B. D. writes: For the past two days we have experienced a succession of heavy vibrations with a simultaneous roar as of a distant explosion. The sky in the direction of the sound (W.S.W.) is clear with a light S.E. wind. Is it possible for us to hear the reports from the Sandy Hook grounds? If not, what can it be? We are at least 60 miles from Sandy Hook light. A. The vibrations and noise were probably from the gun trials at Sandy Hook.

(6519) F. W. S. asks: What preparation would you recommend to be applied to the bright steel and nickel parts of a bicycle to prevent rust? A. Try a colorless lacquer. You can find such in the market made from celluloid. It is very hard and durable. If you want only temporary protection, use vaseline.

(6520) H. P. says: Please give formula for best black varnish for small wooden articles, and the best method of tempering small wire spiral springs. A. Black japan varnish:

Naples asphaltum	50 lb.
Dark gum anime	8 "

Fuse, add 12 gallons linseed oil; boil, then add of dark gum amber, 10 pounds, previously fused and boiled in 2 gallons linseed oil; next add q. s. of driers and thin with oil of turpentine. How to temper a small spring. 1. Heat the spring to a light red, plunge in cold water; hold the spring over the flame of a small fire of shavings until it becomes black, then hold in the fire until the black disappears. Cool the spring by swinging it in the air. 2. Heat the spring to a cherry red, plunge in cold water, and hold over a small fire until warm. Cool with tallow and burn off the tallow over the fire; repeat this process two or three times, cool in water.

(6521) F. E. H. writes: Will you please give me information on the following subject? I have a spring of water that furnishes 21 cubic feet per minute with a fall of 100 feet in a distance of 300 feet. Please tell me the size of pipe necessary to carry this water. How much power would there be if one of Leffel's new jet wheels were used, and what size nozzle would use all of the water? How much power could be procured with same water, 21 cubic feet with a head of 60 feet, and what size nozzle would it take? A. A 2½ inch pipe will deliver the quantity flowing from the spring with an open end pipe. For power purposes you require a pressure head, for which a larger pipe, 3 inches or 3½ inches, is a better size. Use a ⅞ inch nozzle, which will spout 140 gallons per minute, which will run an impact motor of the Pelton or Leffel type at 400 revolutions per minute, and give you 3 horse power. You will lose head by trying to use all the water on the motor. At 60 feet head with the same quantity of water you may use a 1 inch nozzle and realize 1¾ horse power.

(6522) E. J. P. asks: About how much coal does one of the great ocean steamers like the City of Paris burn in twenty-four hours, at the usual five and a half or six day rate of speed? A. The great ocean steamers burn about 400 tons of coal per day.

TO INVENTORS.

An experience of nearly fifty years, and the preparation of more than one hundred thousand applications for patents at home and abroad, enable us to understand the laws and practice on both continents, and to possess unequaled facilities for procuring patents everywhere. A synopsis of the patent laws of the United States and all foreign countries may be had on application, and persons contemplating the securing of patents, either at home or abroad, are invited to write to this office for prices, which are low, in accordance with the times and our extensive facilities for conducting the business. Address MUNN & CO., office SCIENTIFIC AMERICAN, 361 Broadway, New York.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

April 30, 1895,

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

Addressing machine, F. D. Belknap 538,403
Advertising and educational systems, coin-controlled apparatus for, J. S. Barcus 538,494, 538,636
Advertising fan, T. Lo Casto 538,335
Air brake, cylinder and reservoir mechanism, E. G. Shortt 538,547
Air brake graduating mechanism, E. G. Shortt ... 538,551
Air brake mechanism, E. G. Shortt 538,544
Air brake mechanism and engineer's valve for same, E. G. Shortt 538,549
Air brake operating mechanism, Shortt & Normand 538,546
Air brakes, automatic lock for stop cocks of, Tower & Rich 538,299
Alarm. See Fire alarm.
Alarm system, high pressure, E. G. Shortt 538,548
Amalgamator, G. W. Downs 538,642
Animal trap, L. F. Dagnan 538,241
Armature for dynamos and electric motors, Penn & Lowndes 538,344
Autographic register, A. Krauth 538,264
Autographic register, Shoup & Krauth 538,286
Axle box with removable oil well, H. Siebelschmidt 538,553
Axle cap for vehicles, lubricating, F. E. Harvey ... 538,516
Axle lock, vehicle, L. Hagmeyer 538,372
Ball catcher's hand protector, E. L. Wilson 538,572
Bath apparatus, shower, J. Kelly 538,521
Bath cabinet, E. D. Andruss 538,575
Bathtub hand clamp, L. M. Hooper 538,490
Beam, joist, etc., G. M. Viernow 538,562
Bed. A. R. Turner 538,560
Bed and table, folding, Vocke & Lungstras 538,470
Bell, bicycle, Storm & Hunter 538,607
Bell, gong, N. T. Mills 538,379
Belt fastener, I. Jackson 538,332
Bicycle, L. A. Cooper 538,238
Bicycle wheels, making wooden rims for, H. G. Shepard 538,541
Bicycles, variable speed gearing for, J. M. Scobee 538,287
Binder for pamphlets, etc., temporary, A. Neilson 538,621
Bit brace and hand drill, C. D. Cutts 538,323
Bit jack and holder, W. A. Grove 538,254
Block. See Tackle block.
Blowing engine, C. F. Schaller 538,352
Boat or vessel, C. A. De Lambert 538,527
Boiler. See Hot water boiler. Water tube boiler.
Boiler furnace, steam, O. D. Orvis 538,273, 538,274
Book, blank, Gremmel & Sneider 538,487
Book, check, H. H. Angell 538,491
Book holder, J. W. O. Neill 538,534
Book holder, J. A. Sinclair 538,604
Boots or shoes and making same, metallic fastening for, P. A. Coupal 538,322
Bottle capping machine, L. E. Kane 538,259
Bottle stopper, C. K. Fuchs 538,644
Bottling machine, E. Stahl 538,290
Box. See Musical box.
Box filling machine, C. H. Palmer et al 538,535
Brace. See Bit brace. Ladder brace.
Bracket. See Curtain bracket.
Brake. See Electrical brake.
Bridge or culvert, W. A. Nichols 538,432
Brush holder, E. D. Priest 538,281
Bung extracting tool, D. Poggenburg 538,279
Burner. See Incombustible burner. Oil burner.
Button, W. Hornich 538,416
Button, cuff, C. L. Watson 538,395
Button, hose, J. E. Goggin 538,486
Cabinet or safe, curtain, A. McKenzie 538,430, 538,431
Car, air pipe, and steam pipe coupling, combined, R. L. Munson 538,533
Car bolster, railway, C. T. Schoen 538,296
Car brake adjuster, J. Howard 538,418
Car center bearing, railway, S. Walters 538,363
Car coupling, N. W. Aigler 538,362
Car coupling, G. J. Forrey 538,444, 538,445
Car coupling, T. M. Gallagher 538,580, 538,581
Car coupling, J. M. Harrison 538,695
Car coupling, S. J. Meeker 538,398
Car fender, C. E. Montell 538,456
Car fender and trip, C. Mahon 538,391
Car fender or guard, E. Thomas 538,631
Car, freight, A. J. Adamson 538,439
Car life-saving attachment, street, J. P. Fleming. 538,249
Car register, street, G. Rein 538,283
Car safety attachment, street, O. Beck 538,364
Car unloading device, J. McMyler 538,340
Car ventilator, J. Timms 538,298
Cars, combined clevis and rope placer for, W. L. Nelson 538,341
Cars, means for ventilating electric motors on, J. J. Devine 538,325
Carbon for electrical purposes, manufacture of, Shrewsbury & Dobell 538,289
Card clothing for attachment to flats, machine for preparing, R. W. Hunton 538 419
Carriage step, T. Beecher 538,316
Carrier apron, S. Ferguson 538,443
Cartridge, W. W. McKay 538,620
Case or cabinet, J. E. Maxwell 538,592
Caster, Noelting & Frederickson 538,342
Castings, manufacturing soft steel, F. W. Hawkins 538,646
Chain package and packing chains, J. Sinclair 538,629
Chair. See Dental chair.
Chair fan attachment, rocking, J. Weigel 538,566
Channel flap laying machine, W. L. Barrell 538,637
Chuck, lathe, J. A. Lidback 538,334
Cigar lighter, electrical, H. G. O'Neill 538,272
Clamp. See Bathtub band clamp. Leaf creasing clamp. Tire and felly clamp.
Clasp. See Hat band clasp.
Clock, alarm, T. Westerfield 538,306
Clock pendulum adjuster, D. W. Hull 538,257
Closet seat cover or lid, L. Schonfeld 538,388
Cock and relief valve, combination waste, H. I. Boynton 538,317
Combing machines, automatic stop mechanism for wool, J. H. Rogers 538,537
Commutator brush and means for adjusting same, R. Lundell 538,617
Condenser and oil separator, steam, E. Rowe 538,600
Condensing or evaporating and refrigerating fluids, apparatus for, E. Theisen 538,557
Condensing or evaporating apparatus, surface, E. Theisen 538,558
Conveying apparatus, T. S. Miller 538,455
Cooling and preserving apparatus, E. C. Brown ... 538,233
Copper, process of and apparatus for making compressed electrolytic, F. L. M. Urruty 538,359
Copy holder, E. P. Richardson 538,350
Corn cutter and harvester, T. A. Chapman 538,235
Corn shock loader, L. Sbanks 538,627
Corn shellers, ear corn conveyer for, J. Q. Adams 538,400
Couch and storage chest, combined, Caruthers & Savage 538,503
Coupling. See Car coupling. Car, air pipe, and steam pipe coupling. Electrical coupling. Flexible coupling. Pipe coupling. Rod coupling. Thill coupling.
Crank motion, W. J. Devers 538,242
Crate, bicycle, H. Keller 538,422
Crucible, electrically and chemically heated, H. G. O'Neill 538,271
Crushing ore, etc., machine for, H. H. Blake 538,406
Cultivator, J. O. Carroll 538 319
Curtain bracket, J. Reikart 538,349
Cut-out device, thermal, C. A. Rolfe 538,284
Cutter. See Corn cutter. Loom cloth cutter.
Cycle frame, C. W. Brown 538,232
Damper for fireplace grates, D. Slates 538,356
Dental chair, A. W. Browne 538,407
Dental chair, J. I. Peyton 538,465
Desk, money drawer, and distributer, combination, A. D. Coldren et al 538,236
Display tray or bar, A. D. Work 538,639
Dividing angles into equal parts, instrument for, F. W. Cornelius 538,239
Door catch, J. G. Wait 538,305
Door, screen, A. Schreiner 538,538
Draught attachment for farm implements, J. L. Keagle 538,376
Draught equalizer, plow, H. C. Ritterbusch 538,597
Draw bar attachment, continuous, J. Seatb 538,539
Drill. See Grain drill.
Drill, J. S. Surbaugh 538,358
Drum, beating, J. W. Johnson 538,519
Drying granular materials, apparatus for, E. M. Cook 538,237
Dust beater, C. B. Cadman 538 480
Dusting cloth holder, H. O. Neagles 538,269
Dye, red, Pathe & Dressel (r) 11,491
Electric elevator, N. O. Lindstrom 538,327
Electric engine, L. M. Sabin 538,351
Electric machine or motor, dynamo, E. H. Porter 538,345
Electric transmission wheel or trolley, C. C. Burton 538,408
Electrical brake, C. E. Pearson 538,275
Electrical coupling, Koenig & Mann 538,423
Electrodes, making secondary battery, W. L. Silvey 538,628
Elevator. See Electric elevator.
Elevator, A. B. See 538 355
Emery wheels, mechanism for wetting, E. R. Hyde 538,331
Enameling cradle, reversible, O. Marschuetz 538,458
Engine. See Blowing engine. Electric engine. Rotary engine. Traction engine.
Engine, W. F. Schmidt 538,433
Engine indicator, steam, A. F. Hall 538,515
Evaporating and condensing liquids, apparatus for, E. Theisen 538,556
Evaporating apparatus, R. Schicht 538,387
Exercising device, O. Felden 538,579
Explosive rods or grains, apparatus for making, H. Maxim 538,615
Fabric decorating apparatus, J. B. Schweitzer 538,354
Facing for flattening stones, C. Conqueror 538,365
Fans, diffuser for electric, McKeehan & Miles 538,460
Faucet, J. Byrne 538,502
Feedwater regulator for steam boilers, D. & F. D. Almy 538,402
Fence, F. F. Dickey 538,368
Fence stay, wire, Thompson & Bulla 538,559
Fences, device for attaching stay wires in wire, H. C. Pratt 538,385
Fencing, barbed, T. V. Allis 538,401
File, detachable arch, C. H. Stoelting 538,605
File, document, J. M. Bulkley 538,500
File, saw, A. Weed 538,396
Filter, F. A. Reichardt 538,348
Filter, J. M. Wells 538,360
Finger ring lock, C. Bartlett 536,477
Fire alarm, detonating, R. J. Fleischer 538,643
Fire escape, T. Lemond 538,333
Fire escape, T. J. Lindsay 538,615
Fire escape, Wilber & Lavery 538,398
Fire extinguisher, automatic, J. Naylor, Jr 538,593
Fire extinguishers, valve for automatic, F. Gray .. 538,446
Fire tube cheek, E. Kemble 538,589
Flexible coupling, F. M. Rites 538,386
Flue cap, F. E. Heinig 538,647
Flue stopper, Haberkorn & Beckman 538,513
Fuel, machine for making artificial, H. S. Albrecht 538,475
Funnel, filter, A. Farmer 538,369
Furnace. See Boiler furnace.
Furnace, G. A. Bell 538,226
Game board, G. A. McKenzie 538,380
Garment presser, C. N. Lansing 538,425
Garment stretcher, J. H. Way 538,564
Garment supporter, A. S. Grimm 538,488
Gas or other meters, stop register apparatus for, H. Green 538,582
Gate, L. Fetch 538,370
Gate, F. A. Whitney 538,307
Generator. See Magnetogenerator. Steam generator.
Glass, method of and apparatus for manufacture of wire, C. H. Tondeur 538,393
Grain drill, O. B. Pickett 538,276
Grate fuel-saving appliance, A. Glud 538,511
Guard rail, R. B. Poole 538,280
Gun breech mechanism, Benet & Mercie 538,227
Harness, W. D. Fred et al 538,326
Harrow, sod cutter, and roller, combined disk, G. Richter 538,536
Harrow tooth, spring, E. E. Whipple 538,397
Harvester grain binders, twine regulator or tension device for, J. Macphail 538,426
Hat band clasp, M. & I. Grenthal 538,583
Hay carrier track and coupling therefor, J. D. Swacick 538,293
Hay rake, I. G. Lunday 538,590
Hay rake and loader, J. E. Van Nostran 538,394
Headlight, changeable electric, Dibb & Horabeck 538,243
Heating apparatus, G. F. Anderson 538,635
Hinge, spring, J. Henry 538,448
Hog catching and lifting machine, P. S. Driver ... 538,442
Hoisting tackle, single block for, J. D. Swacick ... 538,294
Horse ice shoe, A. E. Makel 538,452
Hospital screen, Brown & Spaulding 538,318
Hot water boiler, B. Chaffee 538,504
House. See Ice house.
Ice house, C. C. Clifton 538,441
Incombusible burner, C. Westphal 538,568
Index, banker's daily balance, T. P. Thomas 538,438
Indicator. See Engine indicator.
Insulating material, J. W. Kidwell 538,614
Invalid's, table, M. Lesser 538,529
Ironing table, C. R. Mills 538,266
Jack. See Bit jack. Lifting jack.
Jar drying apparatus, fruit, E. B. Ball 538,313
Journal box lid, S. Irvin 538,258
Kiln. See Lumber drying kiln.
Kitchen cabinet, combination, J. Tischer 538,632
Knitted patterned fabric, E. D. Friedlander 538,250
Knitting machine, circular, H. A. Houseman 538,518
Lacing stud or book, E. Maynz 538,428
Ladder brace, step, J. T. Miller 538,531
Ladder, step, F. White 538,570
Lamp, C. Maschmeyer 538,427
Lamp, electric arc, J. A. Mosher 538,457
Lamp gas attachment, W. H. Hill 538,415
Lamp wick raiser, L. J. Atwood 538,476
Last and last support, J. N. Parker 538,623
Lathe, turning, R. Wagner 538,304
Lathing, metallic, W. C. Schaper 538,467
Lathing, sheet metal, G. Hayes 538,256
Leaf creasing clamp, J. Keehn 538,520
Life lines, device for throwing, A. Schmitt 538,626
Lifting jack, J. H. Sheridan 538,392
Lightning rod, H. Simpson 538,603
Lime, apparatus for forming milk of, Cook & Reid 538,577
Liquid raising machine, R. Wegner 538,565
Lock. See Finger ring lock.
Lock strike, T. J. Johnston 538,421
Log transfer, steam, Kelly & Wilkinson 538,613
Loom cloth cutter, J. Zuppinger 538,573
Loom shuttle, G. O. Draper 538,507
Lubricating materials, etc., automatic feeder for, B. & G. H. Waters 538,471
Lumber drying kiln, W. Graham 538,412
Lumber loading or stacking apparatus, W. Graham 538,413
Magneto generator, E. T. Gilliland 538,329
Magneto transmitter, E. T. Gilliland 538,328
Mandrel, flexible, J. M. Smith 538,555
Measuring and cutting fabrics, machine for, Palmer, Jr., & Mercer 538,464
Meat softener, W. J. McCausland 538,459
Mensuration form, A. H. Kennedy 538,261
Metal shearing and punching machine, J. C. Burgess 538,234
Milling machine, F. Kempsmith 538,260
Moulding moulds, device for, Pyle & Martin 538,345
Moulds, apparatus for making sand, D. Giles 538,510
Mop wringer, F. C. Rockwell 538,598
Mosaic work, apparatus for producing, F. Alcan .. 538,311
Motor. See Wave motor.
Motor and pump, combined, T. A. Walther 538,633
Mower, lawn, P. R. Rasmussen 538,347
Mucilage holder, E. Terry 538,297
Music holder, F. D. Gross 538,414
Music leaf turner, J. Miller 538,619
Musical box, F. Schaub 538,468
Necktie, S. L. Bachrach 538,312
Necktie fastening device, C. Jungmann 538,375
Need letbreader, L. L. Borradaile 538,479
Nut and bolt lock, H. L. Wood 538,309
Oculists' testing frames, extension bow or temple for, G. W. Wells 538,567
Oil burner, A. J. Blackford 538,638
Optical sight, M. D. Bonnin 538,230
Orange sizer, A. D. Huntley 538,330
Ore separator, centrifugal, M. B. Zerener 538,310
Ores parat omagnetic, J. W. Carter 538,320
Ore separator, magnetic, J. Houleban 538,417
Otophone, J. A. Maloney 538,378
Oversboe fastener, P. & H. H. Nelson 538,270
Pa pefeeding machine, Briggs & Philpott, Jr 538,640
Paper folding and pasting machine, T. C. Dexter. 538,609
Paper folding machine, J. N. Nutt 538,622
Paper rolls, winding shaft for, C. P. Smith 538,454
Paper, safety, J. T. Robertson 538,625
Pen, drawing, V. Berdelle 538,229
Pen, fountain, G. W. Bryden 538,499
Pen, fountain, F. S. Cooley 538,461
Pen, fountain marking, A. W. Askew 538,492
Pencil sharpener, O. J. Lane 538,528
Perambulators on staircases, apparatus for lowering or hoisting, H. T. A. Schulze 538,389
Phonograph receiver, F. S. Kinney 538,262, 538,263
Photographer's flashlight apparatus, W. B. Farwell 538,578
Photographic or similar objects, mount for, E. W. Lundahl 538,616
Piano harmonic scale, J. Ebel 538,244
Pile or post driver, H. I. Petree 538,382
Pipe coupling, E. A. Witham 538,634
Pipe threading machine, R. P. Curtis 538,367
Pipes, external metallic joint for, M. F. Moran .. 538,429
Planter clutch, corn, G. S. Gundersen 538,371
Planter, corn, Gundersen & Gilbert 538,255
Plaster, paris green, etc., machine for spreading, W. E. Everitt 538,483
Potassium chlorate, producing, K. J. Bayer 538,314
Powder holder, L. S. Upton 538,561
Press. See Printing press.
Printing press, H. Swain 538,296
Propulsion, boat, J. F. Place 538,278
Puller. See Stump puller.
Pulp, making moulded articles from wood, Lane & Folk 538,265
Pump attachment, W. E. Sullivan 538,436
Pump, automatic air, J. Morehead 538,267
Pump, rotary, J. Klein 538,524
Rail connector, L. E. Myers 538,458
Railway conduit system, electric, F. H. Homan ... 538,373
Railway switch, J. A. Hill 538,449
Railway switch, automatic, M. N. Shumebarger .. 538,602
Railway, underground electric, J. F. Smith 538,357
Railways, block system and apparatus on electric, E. Langen 538,590
Rake. See Hay rake.
Range finder, B. A. Fiske 538,246
Ratchet wrench, A. W. Kleinfeldt 538,525
Refrigerating apparatus, C. W. Isbell 538 374
Refuse preparatory to cremation, apparatus for and process of treatment of city, J. J. Storer .. 538,606
Register. See Autographic register. Car register.
Register, J. P. Cleal 538,410
Register actuating mechanism, P. D. Crull 538,240
Rewinding machine, cord, Palmer, Jr., & Mercer. 538,462
Rock crushing and grinding apparatus, J. H. Kinkead 538,523
Rod coupling, detachable, F. M. Hurtle 538,611
Rolling machine, pipe, W. S. McCracken 538,268
Roofing, metallic, W. H. Mullins 538,532
Rope coiling machine, J. Garsed 538,495

© 1895 SCIENTIFIC AMERICAN, INC.

Rotary engine, F. J. Haeseler	538,514
Sad iron, J. Banwell	538,363
Sash holder, P. Bonus	538,231
Sawmill set works, E. E. Thomas	538,630
Scale, A. J. Gaston	538,252
Scale, portable platform, A. W. Parkhurst	538,381
Scissors, G. H. Isbell	538,420
Screen. See Hospital screen. Window screen.	
Scrubber, mop, and mop wringer, combined. M. Loftus	538,336
Separating heavy from light materials, apparatus for, F. Pardee	538,596
Separator. See Ore separator.	
Sewing machine, book, W. Beecroft	538,478
Sewing machine, welt, C. Wolentarsky	538,472
Sharpener, knife, J. Benesh	538,404
Sheet separating device, N. E. Funk	538,251
Sheets from rolls, apparatus for cutting, H. Fairbanks	538,245
Shelf, window, L. A. Pendleton	538,343
Shoe, J. S. Bullard	538,440
Shoe fastener, I. D. Wright	538,473
Shoe upper linings, cover for, W. T. Benjamin	538,228
Sifter, cinder, J. L. Jones	538,612
Signaling system, electrical, B. A. Fiske	538,247
Silver and gold from solutions, process of and reagent for recovering, E. D. Kendall	538,522
Singeing apparatus, fabric, R. H. Haworth	538,595
Skate, roller, R. H. Labey	538,526
Skewer pointing machine, J. H. & H. L. Berst	538,496
Slack adjuster, Shortt & Normand	526,545
Sleigh, T. Coleman	538,321
Slitting and rewinding machine, Palmer, Jr., & Mercer	538,463
Smoke consumer and fuel economizer, J. B. Bell	538,495
Soldering machine, can, I. H. Taylor	538,608
Speaking tube exchange, W. J. Frost	538,509
Speech, art of and apparatus for transmitting, J. Absterdam	538,474
Spike machine, A. Barrows	538,576
Spindle bobbin holder, O. C. Burr	538,501
Sprocket wheel, G. De Graff	538,324
Stay, dress, M. Ludwig	538,337
Steam generator, A. A. Plummer	538,624
Steering and propelling apparatus for vessels, H. C. Vogt	538,303
Sterilizing water or other liquids, apparatus for, H. Rouart	538,599
Stocking or garment supporter catch, G. H. Phelps	538,383, 538,384
Stool, kneeling or foot, L. J. Hoffmeyer	538,489
Stopper. See Bottle stopper. Flue stopper.	
Stove, R. M. Smith	538,469
Stove, heating, L. L. Chaffin	538,505
Stove or range, G. A. Fisher	538,484
Stove or range oven, cook, Kaempen, Jr., & Wewers	538,587
Stove, parlor or heating, R. L. Blair	538,497
Stovepipe holder, E. Vander veer	538,302
Stump puller, J. D. Wilson	538,571
Sugar cane car, Humble & Zernott	538,586
Surgical splint, E. A. Tracy	538,300
Switch. See Railway switch. Telephone switch.	
Switch-operating mechanism, D. Strickler	538,292
Table. See Invalid's table. Ironing table.	
Tack or nail driving implement, D. C. Eberhart	538,508
Tackle block, H. V. Hartz	538,584
Tap and faucet, J. Siebert, Jr	538,554
Telephone central office system, E. T. Gilliland	538,327
Telephone switch, A. F. W. Meyer	538,454
Thermocauter, F. A. Reichardt	538,282
Thill coupling, C. King	538,450
Thrasher, flax, T. O. Helgerson	538,447
Tire and felly clamp, G. Willing	538,391
Tire for vehicle wheels, elastic, A. Honrath	538,517
Tongs, adjustable pipe, G. S. Seymour	538,601
Toy and fan, combined, J. Pierce, Jr	538,277
Toy cannon, C. F. Karr	538,588
Traction engine, G. A. Anderson	538,574
Trap. See Animal trap.	
Tricycle, Doan & Sickles	538,482
Trimmer. See Wick trimmer.	
Trolley, J. D. Swacick	538,295
Trolley breaker, W. R. Scott	538,390
Trolley, overhead, C. W. Hunt	538,610
Trolley pole restrainer, F. Wheeler	538,569
Trolley wheel, C. C. Burton	538,409
Trolley wire banger, W. R. Scott	538,391
Trunk or sample case, traveler's, F. J. Palica	538,595
Tuning peg, R. Kuenstler	538,424
Typewriter cabinet, W. A. Stoddard	538,291
Typewriting machine, L. S. Crandall	538,611
Typewriting machine, W. H. Whittemore	538,308
Valve for air brakes, engineer's, E. G. Sbortt	538,542
Valve mechanism, air brake, E. G. Shortt	538,543, 538,552
Valve mechanism for air brakes, engineer's, E. G. Sbortt	538,560
Velocipede, ice, W. Balser	538,493
Ventilator. See Car ventilator.	
Ventilator and chimney top, G. Cooper	538,366
Vessels, construction of, G. W. Schermerborn	538,353
Violin mute, W. Bingham	538,405
Wagon, A. C. & W. F. Sommer	538,435
Wagon or car, H. Flachsbart	538,248
Washing machine, R. Schindler	538,285
Watercloset coupling, W. Vanderman	538,301
Water closet flushing apparatus, J. G. Beattie	538,315
Water closet tank, Morrison & Dyer	538,339
Water elevating device, J. B. Taylor	538,437
Water from surfaces of reservoirs, etc., when water is turbid or contains sediment, device for taking clear, J. Noble	538,461
Water tube boiler, P. W. Greehy	538,253
Wave motor, P. Breitenstein	538,498
Wheel. See Electric transmission wheel. Sprocket wheel. Trolley wheel.	
Wick trimmer, lamp, W. Chandler	538,506
Windmill, W. S. O'Bryant	538,594
Window, Redheffer & Higley	538,466
Window or door button, F. J. Grodavent	538,512
Window screen, adjustable, J. Shankey	538,540
Wire stretching and splicing tool, O. J. La Bauve	538,451
Wrench. See Ratchet wrench.	
Wrench, Bourn & Hale	538,689
Wrench handle, L. & F. L. Coes	538,411
Wringer. See Mop wringer.	

DESIGNS.

Banner, C. P. H. Nason	24,261
Brush back, C. Graff	24,257
Buckle, W. A. Schleicher	24,256
Buggy body, J. A. McDermott	24,264
Card mount, J. P. Odgers	24,258
Collar, H. J. Weldon	24,259
Dust pan, F. L. Stewart	24,262
Furnace front, hot air, W. S. Stevenson	24,266
Lifebelt, W. R. Hargreaves	24,260
Ore breaker tooth, Flynn & Buckley	24,269
Radiator, S. D. Tompkins	24,265
Rand guide, C. W. Glidden	24,268
Stove or range, cooking, Stevenson & Roberts	24,267
Toy passenger car, E. R. Ives	24,263
Vase, R. W. Booth	24,253 to 24,255

TRADE MARKS.

Baking powder, Pepsin Baking Powder Company	26,498
Bullets, Union Metallic Cartridge Company	26,504
Cement, hydraulic, Patterson, Berger & Company	26,502
Cigars, cigarettes, cheroots, tobacco, and snuff, Havana and Key West Cigar Company	26,492
Cotton, crochet, Clark Thread Company	26,489
Detergent and starch polish, solidified, W. A. Shepfer	26,499
Goods, Oriental, A. A. Vantine & Company	26,478, 26,479
Hams, Joseph R. Peebles' Sons Company	26,496
Hams, bacon, smoked meats, lard, and oils, N. Morris & Company	26,497
Macaroni in all its forms, Waeber & Lea	26,495
Medicated belts, Bradford Ointment Belt Company	26,490
Office furnishings, D. A. Patten	26,491
Ointments, R. Lender	26,506
Paints and paint powders, E. Murjahn	26,501
Paving material, Schillinger Brothers	26,503
Porcelain and porcelain goods, Koniglicbe Porzellan Manufactur	26,480 to 26,488
Printed periodicals, I. S. Johnson & Company	26,477
Puzzle, M. A. Hartogensis	26,476
Soap, perfumery, and other toilet preparations, toilet, Lazell, Dalley & Company	26,500
Valves, pneumatic and tire, G. H. F. Schrader	26,505
Whisky, Nelson County, Ky., Distillery Company	26,493
Wines, brandies, and liquors, J. Chaigneau & Company	26,491

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863 will be furnished from this office for 25 cents. In ordering please state the name and number of the patent desired, and remit to Munn & Co., 361 Broadway New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list, provided they are simple, at a cost of $40 each. If complicated the cost will be a little more. For full instructions address Munn & Co., 361 Broadway, New York. Other foreign patents may also be obtained.

Advertisements.

ORDINARY RATES.

Inside Page, each insertion - - 75 cents a line
Back Page, each insertion - - - $1.00 a line

☞ *For some classes of Advertisements, Special and Higher rates are required.*

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at Publication Office as early as Thursday morning to appear in the following week's issue.



Star Lathes Foot Power, Screw cutting, Automatic Cross Feed, 9 and 12 inch Swing. New Designs. Novel Features. *Send for Catalogue* B. SENECA FALLS MFG. COMPANY, 695 Water St., Seneca Falls, N. Y.

LATHES, Shapers, Planers, Drills, Machine Shop Outfits, Foot Lathes, Tools and Supplies. Catalogue Free. SEBASTIAN LATHE CO., 120 CULVERT ST., CINCINNATI, O.

TO INVENTORS. E. Konigslow, Manufacturer of Fine Machinery and Models, offers Special Facilities to Inventors. Guarantees to work out ideas in strictest secrecy, and *any improvement that he can suggest goes with the work.* Thousands of men have crude though really valuable ideas, which they lack mechanical training to develop. Novelties and patented articles manufactured by contract. 181 Seneca St., Cleveland, Ohio.



WELL DRILLING MACHINERY MANUFACTURED BY WILLIAMS BROTHERS, ITHACA, N.Y. MOUNTED OR ON SILLS, FOR DEEP OR SHALLOW WELLS, WITH STEAM OR HORSE POWER. SEND FOR CATALOGUE. ADDRESS WILLIAMS BROS. ITHACA, N.Y.

MACHINE WORK SOLICITED. Complete equipment Modern Machine Tools. Pattern Making, Designing, Experimental Work. Technical assistance if required. Best facilities, very reasonable prices. P. PYBIL, 512-524 West 41st Street, New York.

OIL WELL SUPPLY CO.

Manufacturers of everything needed for ARTESIAN WELLS for either Gas, Oil, Water, or Mineral Tests, Boilers, Engines, Pipe, Cordage, Drilling Tools, etc. *Illust'd catalogue, price lists, and discount sheets on request.* Pittsburg, Oil City and Bradford, Pa. Also, 32 Cortlandt St., New York.

Pumping Water by Compressed Air.

We take pleasure in announcing that by arrangements made with J. G. Pohlé, we are enabled to furnish our customers with the POHLÉ AIR LIFT PUMP, protected by numerous American and Foreign patents. This department of our business will be under the personal supervision of Dr. Pohlé, the inventor and pat'ee. THE INGERSOLL-SERGEANT DRILL CO., Havemeyer Building, 26 Cortlandt St., New York.

TO INVENTORS AND PROMOTERS.

We have had for many years as a specialty the manufacture of some of the most intricate and successful machines, tools and models. Our facilities and equipment, mechanical skill and experience are at your service in bringing to commercial success inventions and improvements in machines or appliances. Satisfaction guaranteed. Contract or day work. For particulars, address THE SIGOURNEY TOOL CO., Hartford, Ct., U.S.A.

FORMED MILLING CUTTERS —FOR— Milling Parts of Machinery.

These Cutters can be made in a great variety of outlines and can be sharpened by grinding without changing form. They are economical in the production of duplicate and interchangeable parts. ☞ *Illustrated Catalogue Free.*

The L. S. Starrett Co., Manufacturer of Fine Tools, P. O. Box 13, ATHOL, MASS.

BARNES Foot-Power MACHINERY. CATALOGUE FREE.

FOR WOOD AND METAL WORK. Machines for Carpenters, Cabinet Makers, Mechanics, Electricians, Blacksmiths, Inventors, Manual Training Schools, Model Makers, Bicycle Repairers, Amateurs, Jewelers. THE BEST FOOT POWER MACHINES IN THE WORLD. W. F. & JOHN BARNES CO., 1999 RUBY ST., ROCKFORD, ILL.

THE SIMPLON TUNNEL.—DESCRIPTION of the project for a tunnel through the Pennine Alps under Monte Leone, which, when completed, will be the longest in the world. Nature of the rock to be traversed, proposed system of construction, ventilation and cooling, hygienic arrangements, outside erections. Full details, with 11 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. **998, 999,** and **1000.** Price 10 cents each. To be had at this office and from all newsdealers.

MECHANICAL DRAWING

Mechanics, Steam Engineering, Electricity, Architecture, R. R. and Bridge Engineering, Plumbing, Heating, Mining, English Branches. Send for free circular, stating subject wish to study or your trade. Correspondence School of Industrial Sciences, SCRANTON, PA.

ACETYLENE. THE COMMERCIAL Synthesis of Illuminating Hydrocarbons.—A paper by Prof. Vivian B. Lewes, read before the London Society of Arts. The production of acetylene from calcic carbide obtained by means of the electric furnace, the light-giving value of this hydrocarbon, its value as a stepping stone to the synthesis of other hydrocarbons, and its commercial possibilities. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **998.** Price 10 cents. To be had at this office and from all newsdealers.


GATES ROCK AND ORE BREAKERS
OVER 3000 IN USE THROUGHOUT THE WORLD
GREATER CAPACITY USING LESS POWER THAN ANY OTHER ON EARTH
MODERN MINING MACHINERY OF EVERY DESCRIPTION
GATES IRON WORKS DEPT T
650 ELSTON AVE. CHICAGO.

Parson's Horological Institute.

School for Watchmakers

ENGRAVERS AND JEWELERS.

☞ *Send for Catalogue and References.*

PARSON'S HOROLOGICAL INSTITUTE, 302 Bradley Avenue, PEORIA, ILL.

The Typewriter EXCHANGE, 8 Barclay St., New York. We will save you from 10 to 50 per cent. on Typewriters of all makes. ☞ *Send for catalogue.*

TYPEWRITERS.

All makes half-price. Rebuilt to equal new. Shipped without deposit to responsible parties in all parts of the world. Unprejudiced advice given. Illust'd cata. free. TYPEWRITER HEADQUARTERS, 45 Liberty Street, New York, U.S.A.

VANDUZEN STEAM JET PUMP THE BEST IN THE WORLD. *Pumps Any Kind of Liquid.* Always in Order, never Clogs nor freezes. Every Pump Guaranteed. 10 SIZES. 200 to 12000 Gallons per Hour. Cost $7 to $75 each. Address THE E. W. VANDUZEN CO., 102 to 108 E. Second St., Cincinnati, O.

MEASUREMENT OF POWER.—BY G. D. Hiscox, M.E. A description of several improved forms of absorption and transmitting dynamometers for the measurement of the useful work of prime movers in mills and factories. With 17 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **992.** Price 10 cents. To be had at this office and from all newsdealers.

LITTLE GIANT SCREW PLATES

Wire sizes for Jewelers, Dentists, Tool Makers, and Amateurs use. Machinists' sets with Taper, Plug, and Bottoming taps for pipe and bicycle work. Also blacksmiths and carriage makers use. ☞ *Send for fully illustrated catalogue.* WELLS BROS. & CO., P.O. Box B, Greenfield, Mass.

A. W. FABER

Manufactory Established 1761.

LEAD PENCILS, COLORED PENCILS, SLATE PENCILS, WRITING SLATES, STEEL PENS, GOLD PENS, INKS, PENCIL CASES IN SILVER AND IN GOLD, STATIONERS' RUBBER GOODS, RULERS, COLORS AND ARTISTS' MATERIALS.

78 Reade Street, - - - New York, N. Y.

Manufactory Established 1761.

THE OBER LATHES

Patented.

For Turning Axe, Adze, Pick, Sledge, Hatchet, Hammer, Auger, File, Knife and Chisel Handles, Whiffletrees, Yokes, Spokes, Porch Spindles, Stair Balusters, Table and Chair Legs and other irregular work. ☞ *Send for Circular A.*

The Ober Lathe Co., Chagrin Falls, O., U.S.A.

ROUND BASE SURFACE GAUGE With Fine Adjustment.

Base turned and polished and is lapped true on the bottom. No better Surface Gauge made. Furnished with extension nut when so ordered, increasing capacity as follows:

6 in.,	$2.25;	with extension to	9 in.,		$2.75
9 "	2.50;	" "	15 "		3.00
12 "	3.50;	" "	21 "		4.00

Sent, charges paid, on receipt of price. Mechanics' Fine Tools of all kinds. ☞ *Send for Illustrated Catalogue B.* Standard Tool Co., - Athol, Mass.

SCIENTIFIC AMERICAN SUPPLEMENT. Any desired back number of the SCIENTIFIC AMERICAN SUPPLEMENT can be had at this office for 10 cents. Also to be had of newsdealers in all parts of the country.

$24. An 8 Light, 16 C. P., 110 Volt Dynamo

To introduce our Dynamos and Motors of larger capacity and gain the confidence of the public, we place on the market a high grade machine retaining all the special features of larger machines. Durable, efficient, compound wound, self-oiling, finely finished. Plating Dynamos, all sizes. ☞ *Send for circular No. 22* ROTH & ECK. 32 Market St., Chicago, Ill.

STEEL TANKS

We furnish steel tanks with covers, all galvanized after completion, in nests of ten, 8 to 12 feet high and 30 to 36 inches in diameter, at 2½c. per gallon. They do not rust, shrink, leak, give taste to water, nor allow foreign substances to get in. They can be put in garret or barn and thus are protected from freezing. They take no setting up, are cheaper than wood. Tank substructures of all sizes made to order. Send for price list and designs for substructure and ornamental water supply. AERMOTOR CO. CHICAGO.

2½ CTS PER GAL.

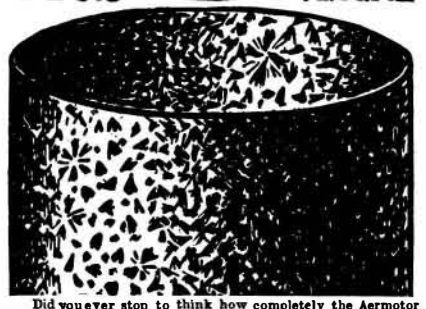

Did you ever stop to think how completely the Aermotor Co. made the modern windmill business? How it has monopolized this entire line of manufacture because of its ideas, inventions, designs, qualities and prices, or forced others to be literal and servile imitators? Witness the steel wheel, the back geared pumper, the high geared power mill, the steel towers, fixed and tilting, the galvanizing of work after completion, the grinder centrifugal feed, the improved irrigating and other pumps, the all steel pole saw—one of the most popular things we ever put out—the steel storage and stock tanks. Everything we have touched we have bettered and cheapened. It is the thing we have delighted in and it has paid. We have established a score of branch houses, so as to have all these goods near those who want them. The Aermotor Co. has but one more ambition. It wants to build and fill one more new building. It has 2 acres of land at its present location unoccupied by buildings. It expects to commence in June to cover that 2 acres with a single building, 7 stories high. This will give it 14 more acres of floor space. Then when the public demand requires more goods than can be produced with this added space, it will refuse to extend further, or make any effort. It will have done its share to supply that demand. It will then turn away all new comers. UNTIL THAT TIME IT EXPECTS TO CONTINUE TO SUPPLY THE WORLD WITH THE GREATER PART OF ITS WIND WHEELS, TOWERS, GRINDERS, FEED CUTTERS, PUMPS, STEEL FRAME BUZZ SAWS, STEEL STORAGE AND STOCK TANKS, STEEL SUBSTRUCTURES, ETC., ETC., GALVANIZED AFTER COMPLETION. IT WILL CONTINUE TO DEAL MOST LIBERALLY WITH THE PUBLIC, FURNISH REPAIRS AT A LOW PRICE, AND BE THE GREAT MODEL SQUARE-DEALING WIND POWER AND WATER SUPPLY HOUSE OF THE WORLD. AERMOTOR CO., CHICAGO.

PUMPS FOR COMPRESSING OXYGEN & HYDROGEN GASES INTO CYLINDERS BY HAND POWER. PRICE $15.00 SEND FOR CATALOGUE No 2 TO CHAS. BESELER, 218 CENTRE ST, NEW YORK.

ICE MACHINES, Corliss Engines, Brewers' and Bottlers' Machinery. THE VILTER MFG. CO., 899 Clinton Street, Milwaukee, Wis.

If you want the best Lathe and Drill

CHUCKS BUY WESTCOTT'S. *Strongest Grip, Greatest Capacity and Durability, Cheap and Accurate.*

Westcott Chuck Co., Oneida, N. Y., U. S. A. *Ask for catalogue in English, French, Spanish or German.* FIRST PRIZE AT COLUMBIAN EXPOSITION, 1893.

NOW READY!

Fourteenth Edition of

Experimental Science

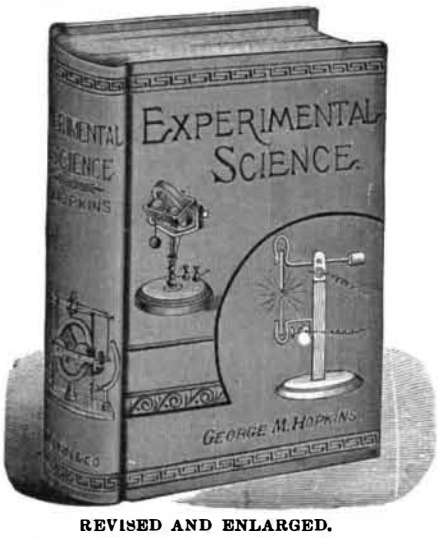

REVISED AND ENLARGED. 120 Pages and 110 Superb Cuts added.

Just the thing for a holiday present for any man, woman, student, teacher, or anyone interested in science. In the new matter contained in the last edition will be found the Scientific Use of the Phonograph, the curious optical illusion known as the Anorthoscope, together with other new and interesting Optical Illusions, the Optical Projection of Opaque Objects, new experiments in Projection, Iridescent Glass, some points in Photography, including Hand Cameras, Cane Cameras, etc.; Systems of Electrical Distribution, Electrical Ore Finder, Electrical Rocker, Electric Chimes, How to Color Lantern Slides, Study of the Stars, and a great deal of other new matter which will prove of interest to scientific readers.

840 pages, 782 fine cuts, substantially and beautifully bound. Price in cloth, by mail, $4. Half morocco, $5. ☞ *Send for illustrated circular.*

MUNN & CO., Publishers, Office of the SCIENTIFIC AMERICAN, 361 BROADWAY, NEW YORK.

CRITERION MAGIC LANTERNS And Stereopticons. Oil, Lime or Electric Light. Front of Lanterns easily removable for substitution of scientific attachments. We make lanterns and views for all kinds of uses. ☞ *Catalogues free.* J. B. COLT & CO., 115 & 117 Nassau Street, New York. 189 La Salle St., Chicago. 50 Bromfield St., Boston. 151 Post St., San Francisco.

© 1895 SCIENTIFIC AMERICAN, INC.

The Metal Worker's Handy Book
OF RECEIPTS AND PROCESSES.

Being a collection of Chemical Formulas and Practical Manipulations for the working of all the Metals and Alloys, including the Decoration and Beautifying of articles manufactured therefrom, as well as their preservation. Edited from various sources by William T. Brannt, editor of "The Techno-Chemical Receipt Book." Illustrated. Over 500 pages, 12mo, elegantly bound in cloth, closely printed, containing a vast amount of valuable matter on all the Metals and Alloys not to be found in any other book in the English language.

☞ *Price $2.50, free of postage to any address in the world.*

☞ *A circular of 24 pages, showing the full Table of Contents of this valuable book, will be sent free and free of postage to any one in any part of the world who will furnish us with his address.*

HENRY CAREY BAIRD & CO.
INDUSTRIAL PUBLISHERS, BOOKSELLERS & IMPORTERS
810 Walnut St., Philadelphia, Pa., U. S. A.

KANE'S PENNINGTON HOT AIR ENGINE
Same power as on Motor Cycles
MARINE and STATIONARY
4 HORSE POWER WEIGHS 50 LBS
THOS. KANE & CO., CHICAGO, ILL.

AGENTS WANTED
to sell the **Best Cooking Kettle in the World.** No more scalded or burned hands. They are made of **Steel** and Granite lined, and adapted for general use. Covers and Steamers and fire-proof Stove Mats included. Every piece warranted. ☞ *Sample free and territory secured.* Address
A. W. OBERMANN,
55 S. 5th Avenue, N. Y. CITY.

MANUFACTURE OF SALT.—BY Thomas Ward. A valuable and interesting paper treating of the various methods by which salt is produced in different parts of the world, but more especially in England. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **993.** Price 10 cents. To be had at this office and from all newsdealers.



SINTZ GAS ENGINE CO.
GRAND RAPIDS, MICH., U. S. A.
Manufacturers of the **Sintz Stationary and Marine Gas and Gasoline Engines.** Especially adapted for Boats and Electric Lighting. Runs with manufactured or natural gas—Boats and launches. Prices within the reach of all. ☞ *Send for Catalogue.* Mention this paper.

BUY TELEPHONES

That are good—not "cheap things." The difference in cost is little. We guarantee our apparatus and guarantee our customers against loss by patent suits. Our guarantee and instruments are **BOTH GOOD.**
WESTERN TELEPHONE CONSTRUCTION CO.,
440 Monadnock Block, CHICAGO.
Largest Manufacturers of Telephones in the United States

SANITARY SOAP VASE
PREVENTS disease, waste, pilfering of soap, clogging of waste pipes, stain of marble, uncleanly soap dish.
AFFORDS each user fresh, dry pure soap.
The Only Clean, Sanitary, and Safe way to use soap.
Agents Wanted.
Sanitary Soap Vase Co.,
Aqueduct Bldg., ROCHESTER, N. Y.

EXPERT MODEL MAKING. Established 1857.
J. C. SEYL, Prop. Chicago Model Works, Chicago, Ill. 179 E. Madison St. Write for Catalogue of Model Supplies

A NEW PIPE WRENCH
Grips quickly and firmly, *GALVANIZED* as well as other pipe, *and will not Crush it.* Won't lock on pipe. Does not mar a nut or highly polished fittings. Other features. All dealers.
☞ *Send for Little Book, Free.*
SAMUEL HALL'S SON, 229 West 10th St., New York.

THE FISHER
Patent Steam Pump Governors
For Steam Pumps Working under Pressure and the
FISHER PATENT GRAVITY GOVERNORS
For Steam Pumps filling elevated open tanks, are the most positive and durable devices made for the purpose.
REDUCING VALVES.
☞ Send for circulars and testimonials.
FISHER GOVERNOR CO.,
201 S. 1st Avenue. - - Marshalltown, Iowa.

MATCH * MACHINERY.
Latest improved. Complete plants furnished. JOS. C. DONNELLY, 1209 Buttonwood Street, Philadelphia, Pa.

ALCO VAPOR LAUNCH
Engine and Helm Controlled from Bow
Latest improved and only 12 to 1 Motor now ready for the market. 18 to 40 ft. Launches, 2, 3, 5 and 7 horse power.



No licensed Engineer or Pilot required. *Speed and Safety guaranteed. No Dangerous Naphtha or Gasoline used.*
Marine Vapor Engine Co., Jersey City, N. J.

EXPERIMENTS IN AERONAUTICS.—An interesting paper by Hiram S. Maxim, giving a history of his experiments in the construction and operation of flying machines, with a discussion of the present status of aeronautics. With one illustration. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. **991** and **992.** Price 10 cents each. To be had at this office and from all newsdealers.

THE ELECTRIC LAUNCH CO.
OFFICE AND WORKS 186 STREET
MORRIS HEIGHTS, NEW YORK CITY

ROCK EMERY MILLSTONES.
Made of Large Blocks of Emery Set in Metal.
Fastest Grinders known. Can grind anything
NO PICKING.
Made Sharp. Stay Sharp
Will Fit any Mill Frame.
Cheap as Best French Buhrs.
Hundreds in Use for All Purposes.
☞ *Send for Circular.*
Sturtevant Mill Co., Boston, Mass.

How To Make a Dynamo
OR MOTOR. ¼ horse power size, illustrated with full working drawings. By Edw. Trevert. Price 10c.
Rubier Publishing Co., Lynn, Mass.

HELLO, CENTRAL!
Do you use telephones? If so, we can give you just what you want. Our specialty is Blake Transmitters. There is a "best" in everything, and ours are the best. We supply complete telephones or all or any of the parts to construct a telephone. Write for illustrated catalogue.
PHŒNIX INTERIOR TELEPHONE CO.,
131 Liberty St., New York.

BI-SULPHIDE OF CARBON for use in the arts, Killing Insects in Grain, Killing Burrowing Animals, etc. Manufactured by E. R. TAYLOR, Cleveland, Ohio

BUSHNELL'S PERFECT LETTER COPYING BOOKS

Make perfect copies of letters with ordinary office ink. No press required. Books roll up to make the copy. Indispensable to the traveler and for private use. Sent by mail, postpaid, on receipt of price.
Note size, 8x10 Inches....$1.00
Letter size, 10x12 inches, $1.30
Send for circular and agents terms. Alvah Bushnell,
403 Chestnut St., Philadelphia, Pa.

Experimental & Model Work
E. V. BAILLARD, 106 Liberty Street, N. Y.

"WOLVERINE"
GAS & GASOLINE ENGINES
STATIONARY AND MARINE.
The "Wolverine" is the only reversible marine gas engine on the market. It is the lightest engine for its power. Requires no licensed engineer. Absolutely safe. Manufactured by
WOLVERINE MOTOR WORKS,
12 Huron St., Grand Rapids, Mich.

$5 HAND BONE, SHELL AND CORN MILLS for Poultrymen.
Circular and testimonials Free.
WILSON BROS., Easton, Pa.

WORCESTER POLYTECHNIC INSTITUTE,
Worcester, Mass.
Four years' courses in Civil, Mechanical, Electrical Engineering and Chemistry. New and extensive laboratories and workshops, thoroughly equipped. Expenses low. For catalogue and information address
T. C. MENDENHALL, President.

PRENTISS TIME SYSTEM
8, 30, 60, 90 and 100 day movements.
SYNCHRONIZED CLOCKS
Synchronizers for Time-Stamps and Recorders. Also Mechanical Self-winding Clocks.
CALENDAR CLOCKS
Tower Clocks, Outside and Synchronized Sign Clocks. *Clocks rented in New York City*
☞ Send for pamphlet and particulars.
The Prentiss Clock Improvement Co.,
49 DEY ST., NEW YORK CITY.

POSSIBILITY OF LIFE IN OTHER Worlds.—A most interesting discussion of this much debated question by the great astronomer, Sir Robert Ball. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **992.** Price 10 cents. To be had at this office and from all newsdealers.



TENTS
We manufacture Tents of every variety and size, for all conceivable purposes.
We have been in the business for fifty-four years and know how to make them properly.
We have made Tents for the War Department of the U. S. Government for many years.
We are now quoting the lowest prices ever heard of, owing to the low price of cotton canvas.
We solicit your orders, large or small, and will send our illustrated Catalogue of Tents and Camp Furniture, if you are interested, upon receipt of your address and six cents in stamps.
GEO. B. CARPENTER & CO.
202-208 S. WATER ST., CHICAGO.

AUTOMATIC TIME DATER.
Warranted for Accuracy and Durability.
Stamps Year, Month, Day, Hour and Minute, Firm Name and any of 6 Other Words.
Indispensable in Factories, Mills, Work Shops, Clubs, Bicycle Depots, Printing Offices, Hotels, Business Offices, etc.
Best and Most Practical Time Stamp now on the Market.
Send for Illustrated Catalogue, *free*
Automatic Time Dater Co.,
220 Fulton St., Brooklyn, N. Y.

THE "MUNSON" TYPEWRITER
This machine is an "evolution," the outgrowth of years of experience and the best results of scientific work. Its principles appeal at once to the educated mechanic. It is **Light, Small, Compact, Easily operated, with Universal Key Board.**
INTERCHANGEABLE STEEL TYPE WHEEL,
durable and easily kept in order. 30 keys, 90 characters. Weight, with carrying case, 16 pounds. Special wheels for different languages.
Highest Medal Awarded, World's Fair, Chicago, 1893. Send for circular to
The Munson Typewriter Co., 171 E. Division Street, Chicago, Ill., U. S. A.

MESSRS. MUNN & Co., Solicitors of Patents, have had nearly fifty years' continuous experience. Any one may quickly ascertain, free, whether an invention probably is patentable by writing to Munn & Co. Communications strictly confidential. A handbook of patents and how to obtain them sent free.

PATENTS
taken through Munn & Co. receive special notice in the *Scientific American.* This splendid weekly paper, elegantly illustrated, has the largest circulation of any scientific work. $3 a year. Specimen copies free.
Address MUNN & CO.,
New York, 361 Broadway.

HELLO!
Our New 50c. Telephone
Entirely new and original. The receivers of this Outfit are so constructed that they have extraordinary acoustic properties. A whisper may be plainly heard at 500 ft. No battery required. Receivers are imitation hard rubber, the same in form as used on regular instruments. For inside and all short lines this is better than a $100 Outfit. Complete for both ends with all accessories and instructions for use. Sent by express on receipt of 50c. or by mail for 12c. extra.
R. H. INGERSOLL & BRO. 65 CORTLANDT ST. N. Y. CITY.

MADE TO ORDER
Imported cloths—Suits and Overcoats from $10 to $20 the style and material you select. We are direct importers—guarantee perfect fit, superior workmanship and finest trimmings. We pay express charges to any part of the United States. Goods sent C. O. D., with privilege of examination. Write for free catalogue, samples and measuring instructions.
THE PROGRESS TAILORING CO.
262 and 264 State St., Dept. 24, Chicago, Ill

WANTED. The owners of a well equipped Foundry and Machine Shop, located within thirty minutes of New York, wish to enter into negotiations for the manufacture of specialties; also for their sale if desired.
Address or call 49 Wall St., Room 20, New York City.

SEND for Catalogue of the Musical Instrument you think of buying. **Violins repaired** by the Cremona System. C. STORY, 26 Central St., Boston, Mass.

SAFETY THRUST COLLARS
SOLID AND SPLIT.
Of character and at price to suit the most critical buyer. Dealers in shafting will consult their interests in writing for Price List and Discounts.
THE GOUVERNEUR MACHINE CO., Gouverneur, N. Y.





CIDER & WINE PRESS MACHINERY.
POWER AND HAND PRESSES.
(*Capacity, 10 to 120 Bbls. in ten hours.*)
Send for 50-page Catalogue.
Empire State Pulley and Press Co.
FULTON, OSWEGO CO., N. Y.



PROTECTION FROM LIGHTNING.—BY Alexander McAdie. A valuable paper discussing the efficiency of lightning rods and the proper method of erecting them. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **998.** Price 10 cents. To be had at this office and from all newsdealers.

GASOLINE ENGINES.

1½ to 75 horse power. For Propelling Boats of all kinds. Cheapest Fuel, Absolute Safety, No Licensed Engineer, Simple Construction. Hundreds in Successful Use.
☞ *Write for illustrated catalogue.*
GLOBE GAS ENGINE CO.,
Merion Avenue & 46th Street, PHILADELPHIA, PA.

MONITOR VAPOR ENGINE AND POWER COMPANY,
8 ERIE STREET, GRAND RAPIDS, MICHIGAN.
GASOLINE LAUNCH ENGINES AND LAUNCHES



CARBORUNDUM
HARDEST ABRASIVE KNOWN. EMERY AND DIAMOND POWDER SUBSTITUTE. IN FLOUR, POWDER, CRYSTAL, WHEEL, SLAB & HONE FORM.
CARBORUNDUM CO. MONONGAHELA CITY, PA. U.S.A.

DEER PARK,
On the Crest of the Alleghenies.

To those contemplating a trip to the mountains in search of health and pleasure, Deer Park, on the crest of the Allegheny mountains, 3,000 feet above the sea level, offers such varied attractions as a delightful atmosphere during both day and night, pure water, smooth, winding roads through the mountains and valleys, and the most picturesque scenery in the Allegheny range. The hotel is equipped with all adjuncts conductive to the entertainment, pleasure and comfort of its guests.

The surrounding grounds as well as the hotel, are lighted with electricity. Six miles distant on the same mountain summit, is Oakland, the twin resort of Deer Park, and equally as well equipped for the entertainment and accommodations of its patrons. Both hotels are upon the main line of the Baltimore and Ohio Railroad, have the advantages of its splendid Vestibuled Limited Express trains between the East and West. Season excursion tickets, good for return passage until October 31, will be placed on sale at greatly reduced rates at all principal ticket offices throughout the country. One way tickets, reading from St. Louis, Louisville, Cincinnati, Columbus, Chicago, and any point on the B. & O. system to Washington, Baltimore, Philadelphia or New York, or vice versa, are good to stop off at either Deer Park, Mountain Lake Park, or Oakland, and the time limit will be extended by agents at either resort upon application, to cover the period of the holder's visit.

The season at these popular resorts commences June 22nd.

For full information as to hotel rates, rooms, etc., address George D. DeSbields, Manager, Deer Park, or Oakland, Garrett County, Md.

1895 High Grade Bicycles
Shipped anywhere C.O.D. Saving you dealers profit.
$100 Oakwood for $62.50
$85 'Arlington' " $45.00
$65 " " $37.50
$20 " " $10.00
Latest models, wood or steel rims; pneumatic tires; weight 17½ to 30 lbs.; all styles and prices. Large illustrated catalogue free.
Cash Buyers' Union, 162 W. Van Buren St. B 131, Chicago

ELECTRIC TELEPHONE
Sold outright, no rent, no royalty. Adapted to City, Village or Country. Needed in every home, shop, store and office. Greatest convenience and best seller on earth.
Agents make from $5 to $50 per day.
One in a residence means a sale to all the neighbors. Fine instruments, no toys, works anywhere, any distance. Complete, ready for use when shipped. Can be put up by any one, never out of order, no repairing, lasts a life time. Warranted. A money maker. Write
W. P. Harrison & Co., Clerk 10, Columbus, O.

DO YOU USE GRINDSTONES?
If so, we can supply you. All sizes mounted and unmounted, always kept in stock. Remember, we make a specialty of selecting stones for all special purposes. ☞ *Ask for catalogue.*
The CLEVELAND STONE CO.
2d Floor, Wilshire, Cleveland, O.

FUNDAMENTAL PRINCIPLES OF Business; Their Application in Practice.—A lecture delivered in the Sibley College Course by T. Dunkin Paret. A very interesting presentation of the subject, full of practical suggestions as to the conditions necessary to obtain business and professional success. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. **998** and **999.** Price 10 cents each. To be had at this office and from all newsdealers.

MANVEL WIND MILLS

with Ball bearing turntable. **Galvanized Steel Mills and Towers.**
Your address calls for half-tone engravings.
WILLIAMS MFG. CO.
Kalamazoo, Mich.
16 Murray St., New York.
36 So. Market St., Boston.

AMATEUR PHOTOGRAPHERS Say That **The Best Blue Print Paper** Is Our

FRENCH SATIN JUNIOR.
4x5 per Gross, $1.00
5x8 " " 2.00
Does all that silver paper will. Unsurpassed for beautiful definition. Keeping qualities guaranteed for one year. Money returned if not satisfactory. ☞ *New Book on Blue Printing, Sample, and Price List sent Free.*
J. C. MILLEN, 923 Arch Street, PHILADELPHIA, PA.

FASTER THAN SHORTHAND!

Anderson's Shorthand Typewriter *prints a word at one stroke!* Price, $25. It is a perfect substitute for stenography, and has already taken its place in many of the largest establishments in the country. You can learn at home without a teacher; no knowledge of shorthand necessary. Begin practice NOW and you will be ready for WORK next month. S. G. K. Anderson, 114 Bennett Bldg., N. Y. Agencies: Auckland, N. Z., Bombay, India

WELL DRESSED MEN
wear only merchant tailor made clothes.

A Tailor-Made Suit For $10.00
We'll make to your measure a Frock or Sack Suit of
ALL WOOL GOODS
equal to any tailors $18.00 garment for $10.00. Other Suits and Trousers just as cheap. We save 50 per cent by buying big lots of woolens direct from the mills—that accounts for it.
All goods sent C. O. D., with privilege of examination before paying express agent. **We pay express charges.**
Send for samples of cloth and full particulars, free.
LOUIS X VEHON, Tailor, 323 Dearborn St., Chicago.

THE HYPNOSCOPE for physicians, dentists, investigators and students of the occult, proves hypnotization possible in all cases. 1256 page book on hypnotism, etc., $2. 100 page pamphlet, 10c.
NATIONAL INST., 321 Spring St., S 5., Los Angeles, Cal.

© 1895 SCIENTIFIC AMERICAN, INC.

Advertisements.

ORDINARY RATES.

Inside Page, each insertion. - 75 cents a line
Back Page, each insertion. - - $1.00 a line

☞ *For some classes of Advertisements, Special and Higher rates are required.*

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at Publication Office as early as Thursday morning to appear in the following week's issue.



OR CONNECTED WITH A
STOCK COMPANY
in its book-keeping or business management? If so, you should possess MY BOOK. Valuable "pointers" in it! **Price $3.** Send for descriptive pamphlet.
J. H. GOODWIN, Room 922, 1215 Broadway, New York City

DEALERS SECURE YOUR ACCEPTANCE
A STRICTLY HIGH GRADE CHAIN LUBRICANT
NO GRAPHITE IN IT
TRY IT
BEST OF THEM ALL
SOLD BY ALL BICYCLE DEALERS
PRICE 25 CTS.

BICYCLE CHAIN
P. O. Box 1503, LIGHTNING CO. New York City.

GARDENIER'S Now Ready.
Ready Help for Locomotive Engineers

This little Book is one of the most practical works ever published on the subject, with a great amount of information of immense value to Engineers and Firemen. Price **$1.00**, postpaid, to any address on receipt of price.
EDWARD MEEKS, Publisher, Philadelphia, Pa.

1¼ to 50 H. P.

Motor of 19th Century
Can be used *any place*, to do *any work*, and by *any one*. No Boiler! No Fire! No Steam! No Ashes! No Gauges! No Engineer! A perfectly safe Motor for all places and purposes. *Cost of operation about one cent an hour to each indicated horse power.* For circulars, etc., address
Charter Gas Engine Co.
P. O. Box 148. Sterling, Ill.

KODAKS $6.00 to $100.00.
The lightest and most practical cameras for hand or tripod use. An illustrated manual, free with every Kodak, tells how to develop and print the pictures.
Eastman Kodak Company,
Send for Catalogue. Rochester, N. Y.

PERFORATED METAL OF EVERY DESCRIPTION FOR ALL USES

CHICAGO, ILL. U.S.A. 284 PEARL ST. N.Y.

AGENTS WANTED WRITE FOR CATALOGUE AND AGENCY. FOR FINE TOOLS IN EVERY SHOP.
C. H. BESLY & CO.
CHICAGO, ILL. U.S.A.

Mistakes in Addition, Office Headache, and mistakes in carrying forward don't occur where the Comptometer is used. It saves half the time in doing the work and all time looking for errors. Solves with great rapidity and absolute accuracy all arithmetical problems. Why don't you get one? Write for Pamphlet.
FELT & TARRANT MFG. CO.
52-56 ILLINOIS ST., CHICAGO.

The American Bell Telephone Company,

125 Milk Street,
Boston, Mass.

This Company owns Letters-Patent No. 463,569, granted to Emile Berliner November 17, 1891, for a combined Telegraph and Telephone, covering all forms of Microphone Transmitters or contact Telephones.

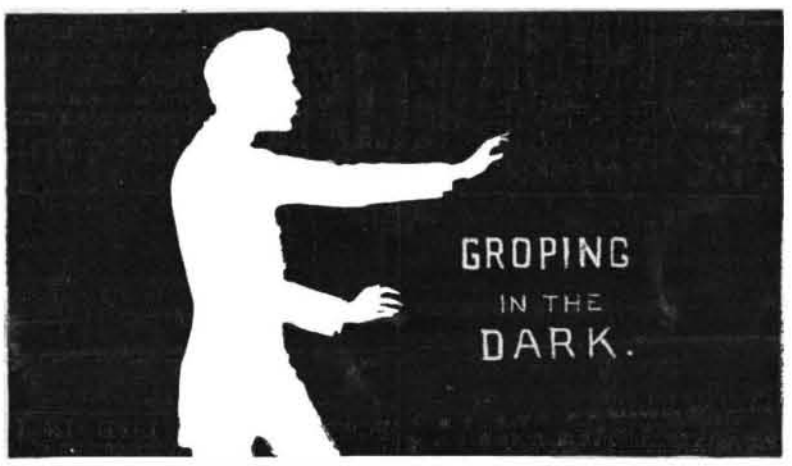

Many bicycle makers are "Groping in the Dark."

They reduce the weight of the wheels at random—and weaken them at vital points.

The weight of a Victor is reduced by science.

Every change depends upon the record of the Dynamometer.*

Others guess—We know—that the Victor is the lightest and easiest running bicycle on the market.

*This wonderful machine is the only device in the world by which the power used to run a bicycle can be accurately measured.
We invented it and use it exclusively to perfect Victor Bicycles.

OVERMAN WHEEL CO.
BOSTON, NEW YORK. DETROIT. DENVER.
PACIFIC COAST: SAN FRANCISCO. LOS ANGELES. PORTLAND.

The Monarch $85 AND $100
King of All Roads

FIVE MODELS—LADIES' AND MEN'S.
Weights, 18 to 25 pounds.
40 Page Catalogue sent for postage.
RIDE A MONARCH AND KEEP IN FRONT
MONARCH CYCLE CO.
CHICAGO, U. S. A.
BRANCHES New York, Memphis, Detroit, Denver, Salt Lake City, San Francisco, Portland, Toronto

DO YOU WANT A LAUNCH?

That you can run yourself.
That is Clean and Safe.



That requires neither Licensed Engineer nor Pilot.

Send 10 cent stamp for Illustrated Catalogue of . . . . . .
THE ONLY NAPHTHA LAUNCH.
GAS ENGINE AND POWER COMPANY, 185th St., Morris Heights, New York City.

WHY NOT MAKE RUBBER STAMPS??
DO YOU WANT TO GO INTO BUSINESS FOR YOURSELF, OR ADD A GOOD LINE TO YOUR PRESENT BUSINESS?



If you want to engage in Pleasant and Profitable work, requiring but little capital, and which can be made to pay well either in a permanent location or traveling, you cannot do better than secure a "New York" combined Rubber Stamp Vulcanizer and Mould Press and Manufacturing Outfit.

Any live man can make money rapidly anywhere with one of our Outfits. It will pay any Stationer or Printer well to put in one of our machines, and Fruit Growers and others using many Stamps will find it very profitable to make Stamps for their own use, and for sale.

These machines are unequaled for Speed, Accuracy and Economy, and produce the Finest Class of Rubber Stamps. They received HIGHEST AWARD, MEDAL and DIPLOMA, at WORLD'S FAIR, CHICAGO, 1893.

With each Machine is sent a copy of our book, "How to Make Rubber Stamps for Profit," which makes every detail so plain, that any person, without previous experience, can turn out First class Stamps at once.

This book is also sold separately at $1.00 per copy, which amount is refunded to purchasers of Outfits. **Write at once, to-day, direct to the manufacturers for complete circulars.**
BARTON MANUFACTURING CO., - - - 340 BROADWAY, NEW YORK.

STERLING BICYCLES
Built like a Watch . . . .
. . . The STRONGEST, LIGHTEST, and FASTEST Bicycles in the World . . . .
Elegant Catalogue Free on request.
STERLING CYCLE WORKS,
236-240 Carroll Ave., D 1, CHICAGO.

365 DAYS AHEAD OF THEM ALL
APPLY AT ONCE FOR CATALOGUE OR AGENCY FOR
KEATING BICYCLES
SEE THAT CURVE
FACTORY HOLYOKE MASS

$18 buys a beautiful little Canoe; or a Magnificent Pleasure Boat for **$125**
☞ *Send for 60-page illus catalog.*
J. H. RUSHTON, CANTON, N. Y.

MANUFACTURE OF BICYCLES.—A very comprehensive article giving the details of construction of every part of these vehicles. With 15 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **908**. Price 10 cents. To be had at this office and from all newsdealers.

SUPERIOR TO COTTON WASTE
Endorsed by Fire Underwriters
Safe, durable, cheaper
Agents wanted
RAW SILK MACHINERY WIPERS
Beware of loose woven imitations
AMERICAN SILK MFG. CO.
313 Walnut Street, Philadelphia, Pa.

Waverley Bicycles

Are Warranted the Highest of all High-Grade Machines Built in the World, Regardless of Price.
☞ *Catalogue Free.*

Our facilities are the Best in the World for the Production of the Finest Possible Results. Every Machine Fully Guaranteed.
21 lb. Scorcher, - - - - $85.00
Ladies' 22 lb., - - - - 75.00
INDIANA BICYCLE CO., INDIANAPOLIS, IND., U. S. A.

ENGINES, Boilers and Machine Tools. New and Second-hand. *Send stamp for paper "Machinery & Supplies."* W. P. Davis. Rochester, N. Y.

EMERY. Emery Wheels, Grinding Machines and Grinders' Supplies. Quick process and large stock. When in a hurry, buy of THE TANITE CO., NEW YORK CITY, CINCINNATI, and STROUDSBURG, PA.

MODEL & EXPERIMENTAL WORK
S. P. DENISON, 143 Center St., New York.

NEW MAIL
Highest Possible Grade.
Price for 1895, - - $85
Men's and Ladies Patterns.

Boys' and Girls' Wheels, $15, $20, $40, etc.
Wm. Read & Sons, 107 Washington St., Boston

PRIESTMAN SAFETY OIL ENGINE
"Phenomenally low in cost of operation."—Franklin Inst.
NEITHER STEAM NOR ENGINEER

Economical, Simple, Safe, Automatic. For Electric Lighting, Pumping, Milling, etc.
PRIESTMAN & COMPANY, Inc.
Front and Tasker Streets, - - Philadelphia

At ¼ Price Bicycles, Watches, Guns, Buggies, Harness, Sewing Machines, Organs, Pianos, Scales, Tools, scales of all varieties and 1000 other articles. Lists free. CHICAGO SCALE CO., Chicago, Ill.

MACHINISTS' LATHE.
Latest Improvements
New Styles.
New Prices.
Growing rapidly in favor.
Send for Catalogue A.
American Watch Tool Co., Waltham, Mass.

TOWERS AND TANKS
PATENT SECTIONAL
ALL IRON TOWERS
of 4 and 12 Columns,
for Water Works, Cities, Towns, and Manufactories.
PLAIN, ALL WOOD TOWERS
ELEVATED TANKS
for Automatic Fire Sprinkler Plants
MANUFACTURERS OF
IRON and STEEL TANKS.
Louisiana Red Cypress Wood Tanks a Specialty.
W. E. CALDWELL CO.,
219 E. Main Street,
LOUISVILLE, KY., U. S. A.



THE "CLIMAX"
Stereotyper and Moulding Press

combined, for making perfect Celluloid Stereotypes to be used in place of metal stereotypes. Also for making Rubber Stamps. Should be in use in every printing office.
See SCI. AM., Dec. 30, 1893. Send for circular to
THE J. F. W. DORMAN CO.
217 E. German St.,
Baltimore, Md.
Manufacturers of Rubber Stamps, Vulcanizers, Stereotype Machinery and Supplies.

Scientific Book Catalogue
RECENTLY PUBLISHED.
Our New Catalogue containing over 100 pages, including works on more than fifty different subjects. Will be mailed free to any address on application.
MUNN & CO., *Publishers* SCIENTIFIC AMERICAN,
361 Broadway, New York.

They All Like It.
The Ladies Like It.
So Do The Men.
Children Enjoy It.
Layman Pneumatic Boats.

Place your order in time to be filled for this season.
Free—*Our Descriptive Catalogue and Price List.*
Address H. D. LAYMAN,
851 Broadway, New York.

WATER MOTOR CASTINGS
1/16 Horse Power.

A. F. WEED & CO.
106-8 Liberty St., New York.
☞ *See illustrated notice, page* 155, SCI. AM., *March* 9, 1895
Gas Engine Castings, Boilers, Engines, Dynamos, etc., etc.

THE NEWSPAPER AND THE ART of Making It.—An address delivered at Cornell University, by Charles A. Dana, editor of the New York Sun. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **995**. Price 10 cents. To be had at this office and from all newsdealers.

Bundy Steam Trap.

Are You Saving One Dollar a Day
By Using a BUNDY RETURN STEAM TRAP?
IF NOT, WHY NOT? THOUSANDS ARE!
A. A. GRIFFING IRON CO.,
Primer "S" Free. 15 DEY STREET, New York

PRINTING INKS.
The SCIENTIFIC AMERICAN is printed with CHAS. ENEU JOHNSON & CO.'S INK, Tenth and Lombard Sts., Philadelphia, and 47 Rose St., opp. Duane, New York

© 1895 SCIENTIFIC AMERICAN, INC.